

### FEATURES

- Soft Start
- 100% Burn In
- High Reliability
- Remote ON/OFF
- Up to 87% Efficient
- Cost Efficient Solution
- Fast Transient Response
- Fixed Switching Frequency
- Optional Heatsink Available
- *Economy Version of the LV Series*
- Short Circuit and Over Current Protected
- Remote Sense Compensation to 10% Vout
- Optional Encapsulation for Added Ruggedness

### APPLICATIONS

- For use in 12V and 24V Battery Applications
- For use in Intermediate and Distributed Bus Architectures (IBA)
- Telecommunications Equipment
- Network (LANs/WANs) Equipment
- Next Generation Low Voltage, High Current Microprocessors and ICs



### DESCRIPTION

The ELV series is an economy version of our LV series. The ELV series consists of high density, low input voltage, isolated converters with a wide input voltage range. Low input voltage converters are uncommon in the industry and the ELV series offers the flexibility of operation with both 12V and 24V busses. This state-of-the-art converter's features include fast transient response, short circuit protection, over current protection, soft start, and many other features that are required for today's demanding applications. This series is available in both encapsulated and open frame designs.

### SPECIFICATIONS: ELV Series

*All specifications apply @ 25°C ambient unless otherwise noted*

#### INPUT SPECIFICATIONS

Input Voltage Range .....	10 - 36VDC
Remote ON/OFF .....	Logic Enable referenced to -Vin,
No suffix .....	Open/High=ON, Low=OFF
"R" suffix .....	Open/High=OFF, Low=ON
Input Reflected Ripple current.....	225mA typ.
Input Surge Voltage .....	50VDC max for 100ms

#### OUTPUT SPECIFICATIONS

Output Voltage .....	see table
Voltage Accuracy .....	±1%
Output Adjustability .....	±10%
Output Current .....	see table
Output Power .....	see table
Line Regulation (LL to HL at FL) .....	±0.2%
Load Regulation (20% to 100% load).....	±0.2%
Ripple/Noise (20 MHz BW) .....	1.5%
Remote Sense Compensation .....	10%
Transient Response (50% load step).....	250ms
Temperature Coefficient.....	±0.2% / °C

#### PROTECTION SPECIFICATIONS

Current Limit .....	110~140%
Short Circuit Protection .....	Continuous

#### GENERAL SPECIFICATIONS

Efficiency .....	Up to 87%
Switching Frequency .....	300KHz typ.
Isolation Voltage	
Input to Output .....	1500VDC
Input to Case .....	500VDC
Output to Case.....	500VDC
Isolation Resistance.....	10MΩ min.

#### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature (case).....	-40°C ~ +100°C
Storage Temperature.....	-50°C ~ +125°C
Humidity.....	to 95%
MTBF.....	2,563,116 hours

#### PHYSICAL SPECIFICATIONS

Weight .....	4oz (113g)
Dimensions	
Encapsulated .....	2.28 x 2.40 x 0.50 inches [61.0 x 57.9 x 12.7 mm]
Open Frame.....	2.18 x 2.30 x 0.53 inches [55.4 x 58.4 x 13.5 mm]
Case Material.....	aluminum alloy

*Due to advances in technology, specifications subject to change without notice*


### MODEL SELECTION TABLE

Model Number for Threaded Inserts	Model Number for Thru-Hole Inserts	Input Voltage Range	Output Voltage	Output Current	Output Power
ELV12S15-50	ELV12S15-50TH	12 / 24 VDC (10 - 36 VDC)	15 VDC	3.33A	50W
ELV12S18-50	ELV12S18-50TH		18 VDC	2.78A	50W
ELV12S3.3-75	ELV12S3.3-75TH		3.3 VDC	21.4A	75W
ELV12S5-100	ELV12S5-100TH		5 VDC	20.0A	100W
ELV12S8-100	ELV12S8-100TH		8 VDC	12.5A	100W
ELV12S12-100	ELV12S12-100TH		12 VDC	8.3A	100W
ELV12S15-100	ELV12S15-100TH		15 VDC	6.67A	100W
ELV12S18-100	ELV12S18-100TH		18 VDC	5.56A	100W
ELV12S20-100	ELV12S20-100TH		20 VDC	5.0A	100W

### NOTES


1. This series is available in both encapsulated and open frame designs. For open frame design add the suffix "O" to the part number. (Ex: ELV12S15-100O)
2. Pin to pin tolerance:  $\pm 0.01"$  [ $\pm 0.3\text{mm}$ ], pin diameter tolerance:  $\pm 0.005"$  [ $\pm 0.13\text{mm}$ ].
3. Case material: 0.040" [1.02mm] thick, aluminum alloy 3003-0, per: QQA 250/2.
4. Unit comes with either 3M x 0.5 threaded thru inserts or for 0.125 thru-hole add "TH" suffix to model part number. (Ex: ELV12S12-100TH)
5. Optional heatsink available. Please call factory for ordering details.
6. Active high enable is standard; for active low enable add the suffix "R" to the part number (Ex: ELV12S15-100R).

ELV12S12-100 Efficiency vs Output Current

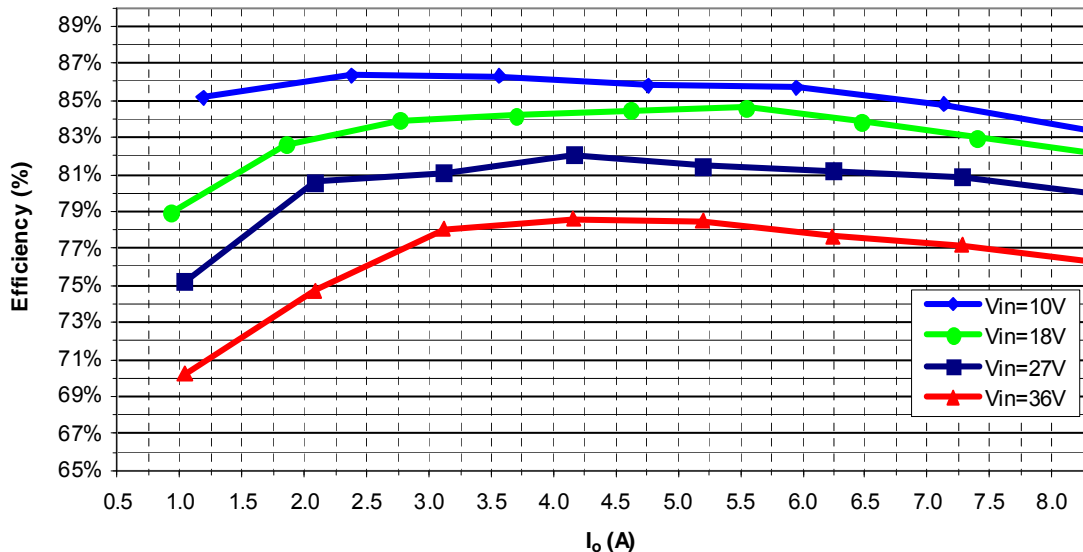

### MECHANICAL DRAWING (Standard)

Unit: inches [mm]

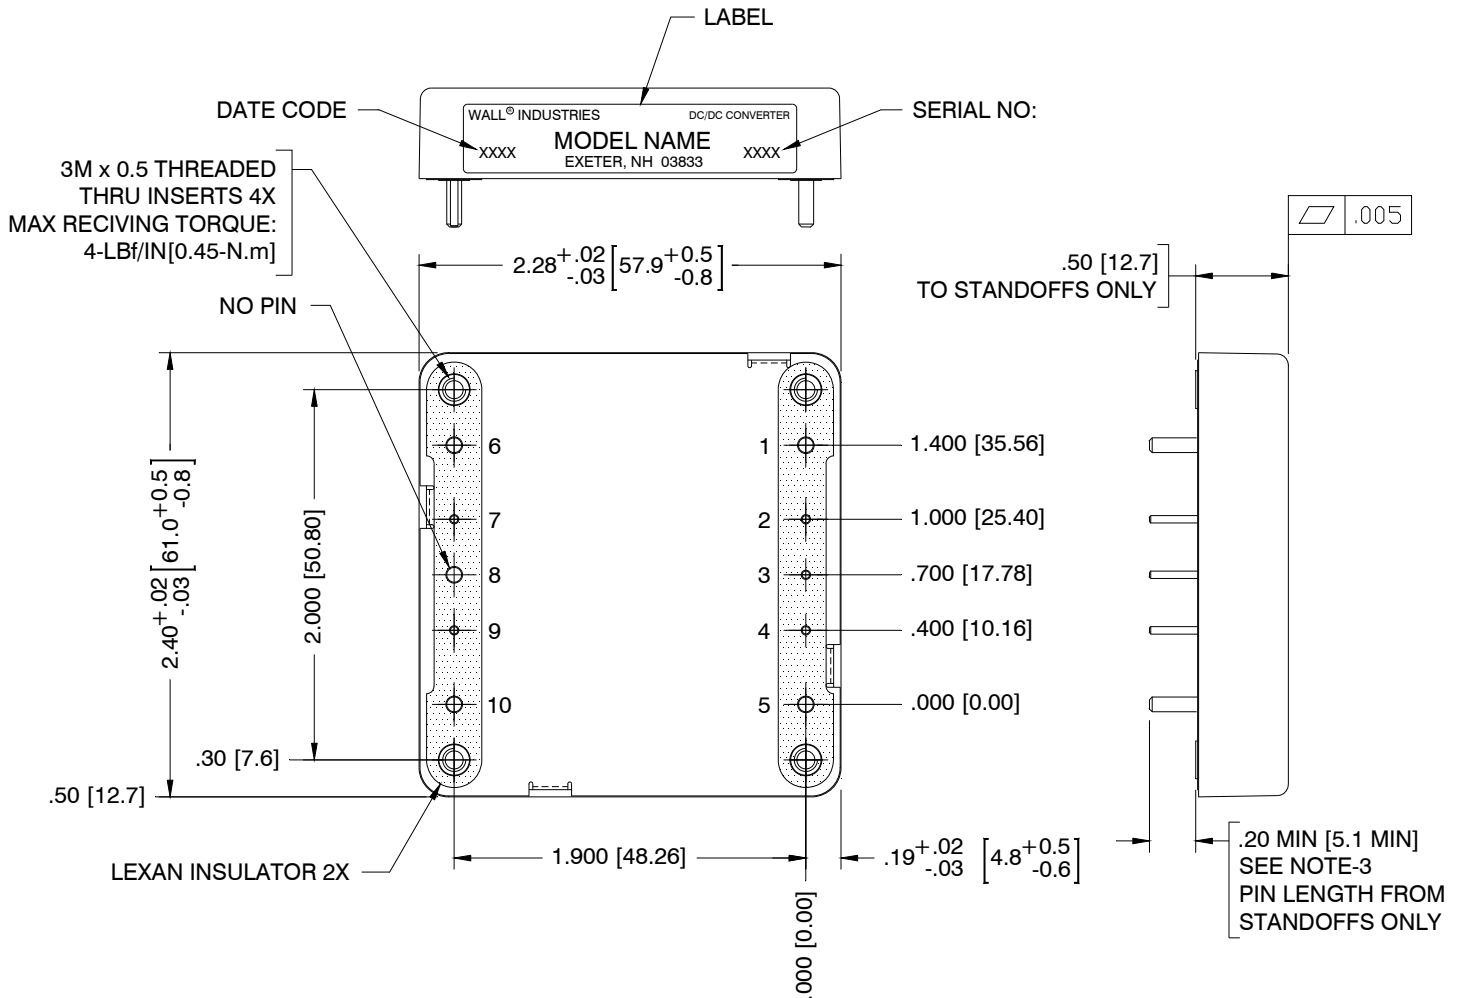

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE IN INCHES  
[XX] ARE IN MILLIMETERS  
APPLIED TOLERANCES:  
ANGLES = ±1°  
X.XX=±0.02 [0.5] X.XXX=±0.010 [0.25]  
DO NOT SCALE DRAWING  
INTERPRET DIMENSION AND TOLERANCE  
PER ASME Y14.5M - 1994

PIN DESIGNATION	PIN Ø
1 -OUTPUT	Ø.081
2 -SENSE	Ø.040
3 TRIM	Ø.040
4 +SENSE	Ø.040
5 +OUTPUT	Ø.081
6 -Vin	Ø.081
7 CASE GRD	Ø.040
8 NO PIN	
9 ON/OFF	Ø.040
10 +Vin	Ø.081

#### NOTES:


- PIN TO PIN TOLERANCE ± .01 [±0.3],  
PIN DIAMETER TOLERANCE: ±.005 [±0.13].
- CASE MATERIAL: .040 [1.02] THICK, ALUMINUM ALLOY 3003-0,  
PER: QQA 250/2.
- UNLESS OTHERWISE SPECIFIED.

#### TO ORDER:

- UNIT COMES WITH EITHER 3M x 0.5 THREADED THRU INSERTS  
OR FOR Ø.125 THRU-HOLE ADD: "TH" SUFFIX TO MODEL PART  
NUMBER. EXAMPLE: ELV12S15-100TH
- CONSULT FACTORY FOR OPTIONAL HEAT SINK.

### MECHANICAL DRAWING (Thru-Hole Version)

Unit: inches [mm]

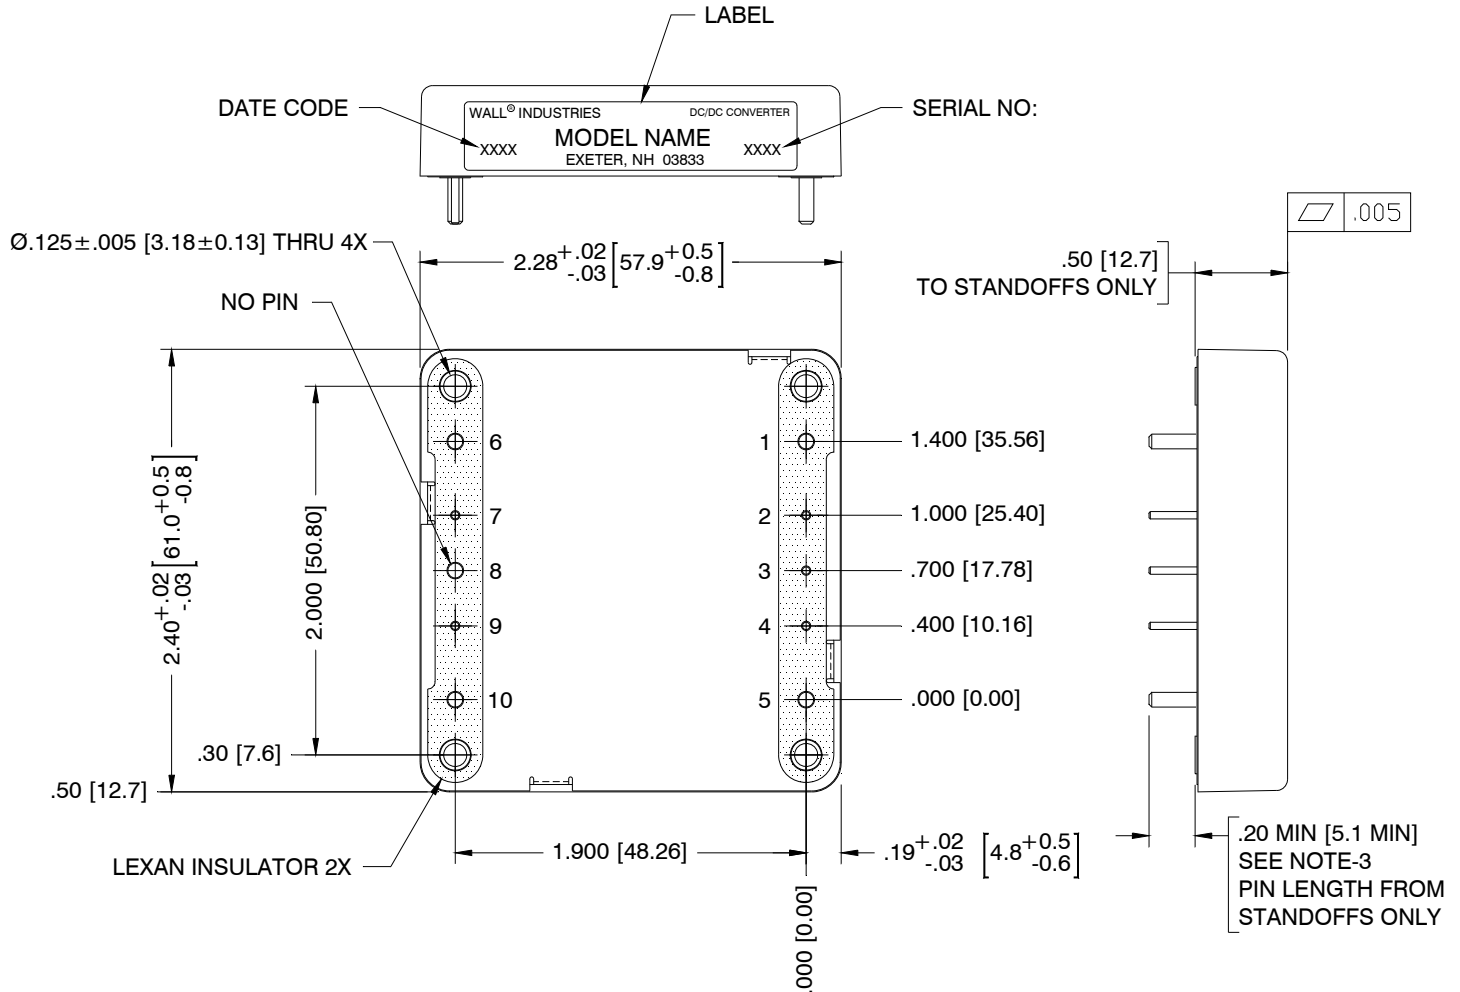

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE IN INCHES  
[XX] ARE IN MILLIMETERS  
APPLIED TOLERANCES:  
ANGLES = ±1°  
X.XX=±0.02 [0.5] X.XXX=±0.010 [0.25]  
**DO NOT SCALE DRAWING**  
INTERPRET DIMENSION AND TOLERANCE  
PER ASME Y14.5M - 1994

PIN DESIGNATION	PIN Ø
1 -OUTPUT	Ø.081
2 -SENSE	Ø.040
3 TRIM	Ø.040
4 +SENSE	Ø.040
5 +OUTPUT	Ø.081
6 -Vin	Ø.081
7 CASE GRD	Ø.040
8 NO PIN	
9 ON/OFF	Ø.040
10 +Vin	Ø.081

#### NOTES:

- PIN TO PIN TOLERANCE ± .01 [±0.3],  
PIN DIAMETER TOLERANCE: ±.005 [±0.13].
- CASE MATERIAL: .040 [1.02] THICK, ALUMINUM ALLOY 3003-0,  
PER: QQA 250/2.
- UNLESS OTHERWISE SPECIFIED.

#### TO ORDER:

- UNIT COMES WITH EITHER 3M x 0.5 THREADED THRU INSERTS  
OR FOR Ø.125 THRU-HOLE ADD: "TH" SUFFIX TO MODEL PART  
NUMBER. EXAMPLE: ELV12S15-100TH
- CONSULT FACTORY FOR OPTIONAL HEAT SINK.