


# Long Distance Reflective Switch

OPB732, OPB732WZ



## Features:

- PC board mounting (OPB732)
- 24" (610 mm) 26 AWG wired with mounting tabs (OPB732WZ)
- Non-contact infrared switch
- Up to 1" or more reflective distance depending on circuitry



## Description:

**OPB732** uses an Infrared LED and Phototransistor in a reflective switch configuration. The assembly is offered with either PCBoard through hole pins (**OPB732**) or 24" (610 mm), 26 AWG wires (**OPB732WZ**), and uses an opaque housing to reduce the sensor's ambient light sensitivity. The emitter and sensor are protected by a clear window, providing a device that can operate in a dusty environment. The phototransistor can be configured as a Common Collector or Common Emitter device.

While an object is in the reflective path of the device, light from the LED will be reflected back to the housing irradiating the surface (base) of the phototransistor. When Infrared light strikes the phototransistor, the transistor becomes forward biased and is considered to be in the "ON" state, providing an  $I_{C(ON)}$  current proportional to the light striking the phototransistor. With the Infrared light from the LED not being reflected to the phototransistor, the phototransistor turns "OFF," minimizing the  $I_{C(ON)}$  current.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

## Applications:

- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Equipment security
- Door sensor
- Machine safety
- End of travel sensor

### Ordering Information

| Part Number | LED Peak Wavelength | Lead Length / Spacing |
|-------------|---------------------|-----------------------|
| OPB732      | 850 nm              | 0.150" / see diagram  |
| OPB732WZ    |                     | 24" / 26 AWG Wire     |




RoHS

General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
[www.optekinc.com](http://www.optekinc.com) | [www.ttelectronics.com](http://www.ttelectronics.com)

# Long Distance Reflective Switch

OPB732, OPB732WZ

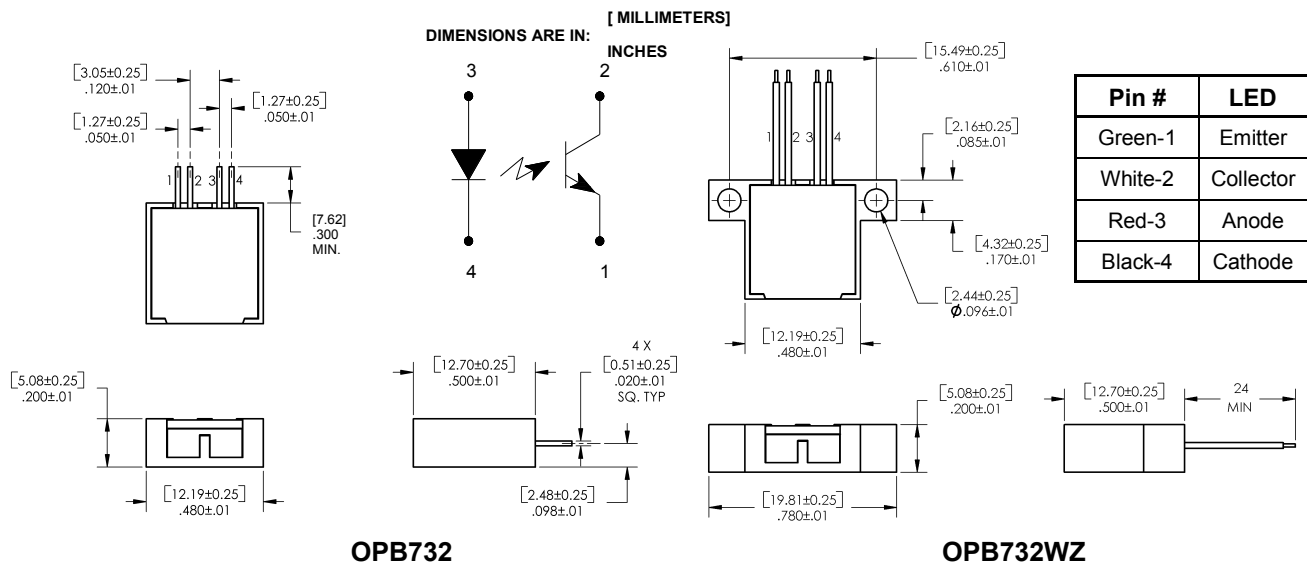

## General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com

# Long Distance Reflective Switch

OPB732, OPB732WZ



## Electrical Specifications

| Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)                           |                                                     |      |     |     |               |                                                                         |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------|-----|-----|---------------|-------------------------------------------------------------------------|
| Storage Temperature                                                                                   |                                                     |      |     |     |               | -40° C to +100° C                                                       |
| Operating Temperature                                                                                 |                                                     |      |     |     |               | -40° C to +85° C                                                        |
| Lead Soldering Temperature (1/16" (1.6mm) from case for 5 seconds with soldering iron) <sup>(2)</sup> |                                                     |      |     |     |               | 260° C                                                                  |
| LED                                                                                                   |                                                     |      |     |     |               |                                                                         |
| Forward Current                                                                                       |                                                     |      |     |     |               | 50 mA                                                                   |
| Peak Forward current (2 $\mu\text{s}$ pulse width, 0.1% Duty Cycle)                                   |                                                     |      |     |     |               | 1 A                                                                     |
| Reverse DC Voltage                                                                                    |                                                     |      |     |     |               | 3 V                                                                     |
| Power Dissipation                                                                                     |                                                     |      |     |     |               | 100 mW                                                                  |
| Output Photo Transistor                                                                               |                                                     |      |     |     |               |                                                                         |
| Collector-Emitter Voltage                                                                             |                                                     |      |     |     |               | 30 V                                                                    |
| Collector DC Current                                                                                  |                                                     |      |     |     |               | 50 mA                                                                   |
| Power Dissipation                                                                                     |                                                     |      |     |     |               | 100 mW                                                                  |
| Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)                         |                                                     |      |     |     |               |                                                                         |
| SYMBOL                                                                                                | PARAMETER                                           | MIN  | TYP | MAX | UNITS         | TEST CONDITIONS                                                         |
| Input LED (See OP265 for additional information, reference only)                                      |                                                     |      |     |     |               |                                                                         |
| $V_F$                                                                                                 | Forward Voltage                                     | -    | -   | 1.8 | V             | $I_F = 20\text{ mA}$                                                    |
| $I_R$                                                                                                 | Reverse Current                                     | -    | -   | 100 | $\mu\text{A}$ | $V_R = 2\text{ V}$                                                      |
| Output Phototransistor (See OP505 for additional information, reference only)                         |                                                     |      |     |     |               |                                                                         |
| $V_{(BR)CEO}$                                                                                         | Collector-Emitter Breakdown Voltage                 | 30   | -   | -   | V             | $I_C = 100\text{ }\mu\text{A}$ , $E_E = 0\text{ mw/cm}^2$               |
| $I_{CEO}$                                                                                             | Collector-Emitter Dark Current                      | -    | -   | 100 | nA            | $V_{CE} = 10\text{ V}$ , $E_E = 0\text{ mw/cm}^2$                       |
| Coupled                                                                                               |                                                     |      |     |     |               |                                                                         |
| $V_{CE(SAT)}$                                                                                         | Collector-Emitter Saturation Voltage <sup>(4)</sup> | -    | -   | 0.4 | V             | $I_C = 250\text{ }\mu\text{A}$ , $I_F = 30\text{ mA}$ , (4)             |
| $I_{C(ON)}$                                                                                           | On-State Collector Current <sup>(4)</sup>           | 0.25 | -   | -   | mA            | $V_{CE} = 1\text{ V}$ , $I_F = 30\text{ mA}$ , (4)                      |
| $I_{CX}$                                                                                              | Cross Talk                                          | -    | -   | 50  | $\mu\text{A}$ | $V_{CE} = 5\text{ V}$ , $I_F = 30\text{ mA}$ ,<br>No reflective surface |

### Notes:

- (1) All parameters tested using pulse technique.
- (2) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (3) Methanol or isopropanol are recommended as cleaning agents. The plastic housing is soluble in chlorinated hydrocarbons and ketones.
- (4) Distance = 1" (from front of package to a 90% diffuse reflective white card)


### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006  
Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com

# Long Distance Reflective Switch


OPB732, OPB732WZ

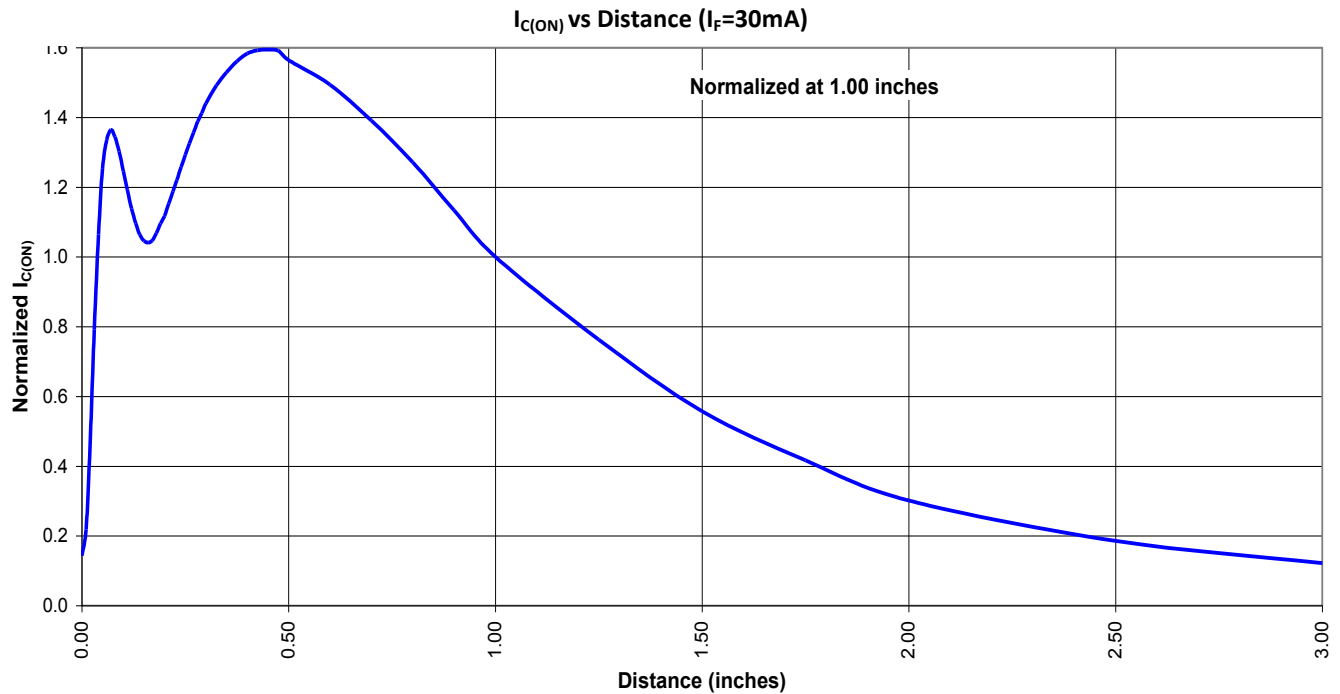

**DC—Drive Circuit for LED & Phototransistor**

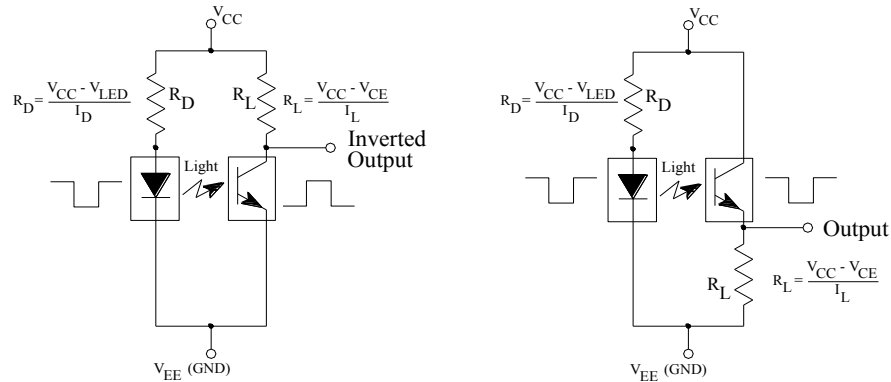

**Pulsed—Drive Circuit for LED & Phototransistor**

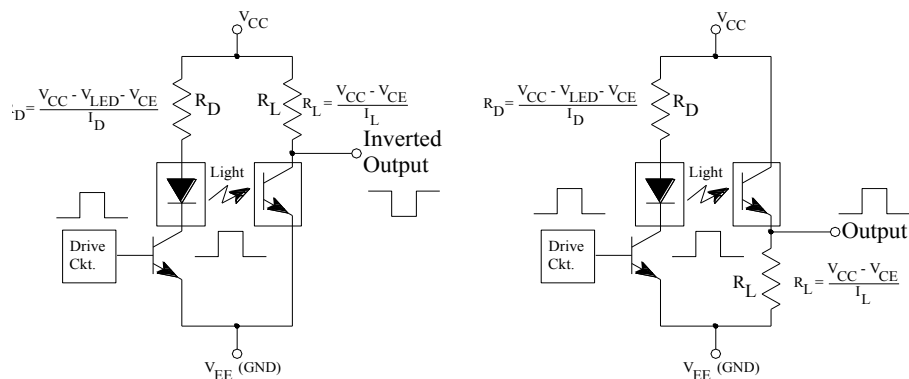

## General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com