



1. Mechanical Dimensions:

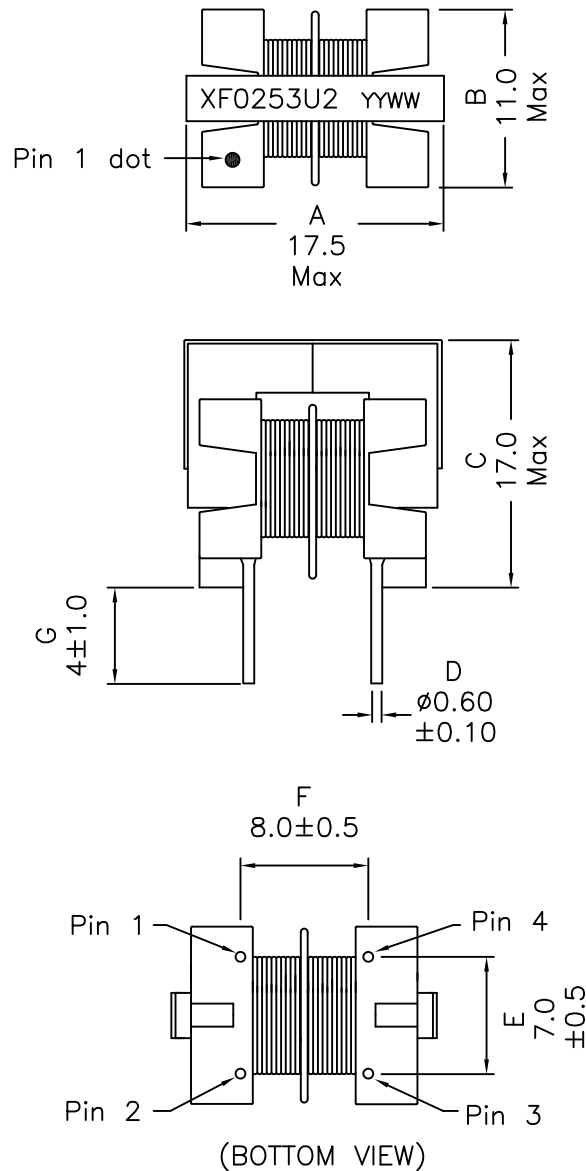

2. Schematic:

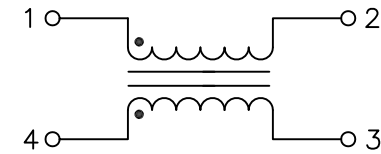

3. Electrical Specifications:

- OCL: 25mH+50/-30% @10KHz, 0.1V
- LL: Pins 1-2 TBDuH Max @100KHz 0.1V (Short 4-3)
- Q: Pins 1-2 TBD Min @10KHz 0.1V
- SRF: Pins 1-2 TBD KHz Min
- DC Res: 3.6 Ohms Max (each wdg)
- Rated Current: 250mArms Max
- Turns Ratio: (1-2):(4-3) = 1:1±1%
- Rated Voltage: 250VAC Max
- Isolation: 2000Vrms Wdg-Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +125°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/-

XFMRs Inc www.XFMRs.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM	P/N: XF0253-00U2	REV. A
SHEET 1 OF 1	APP.	YK Liao Sep-25-15	Joe Huff Sep-25-15

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.