

CLF12577NIT-2R2N-D









Applications	Automotive Grade	
Feature	AEC-Q200 AEC-Q200 Wire Wound Wire Wound Shield Magnetic Shield Ferrite Core	
Series	CLF-NI-D	
Status	Production	



Size		
Length(L)	12.80mm ±0.30mm	
Width(W)	12.50mm ±0.30mm	
Thickness(T)	7.70mm ±0.30mm	
Recommended Land Pattern (A)	4.50mm Nom.	
Recommended Land Pattern (B)	6.20mm Nom.	
Recommended Land Pattern (C)	4.20mm Nom.	

Electrical Characteristics			
Inductance	2.2μH ±30% at 100kHz		
Rated Current (L Change) [Typ.]	20A (30% Down)		
Rated Current (L Change) [Max.]	16.5A (30% Down)		
Rated Current (Temperature Rise) [Typ.]	9.7A (40°C Rise)		
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	6.3mΩ		
DC Resistance [Max.]	8.19mΩ		
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 150°C		
Coldaring Mathad	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	Yes		
Packing	Blister (Plastic)Taping [330mm Reel]		
Package Quantity	500pcs		
Weight	4g		

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website. ! All specifications are subject to change without notice.



CLF12577NIT-2R2N-D













Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

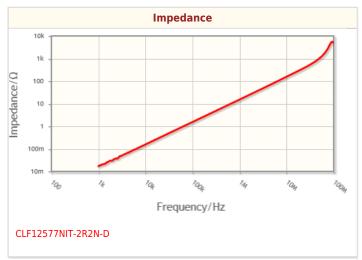

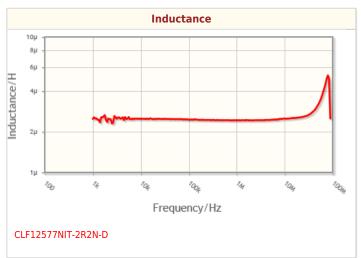

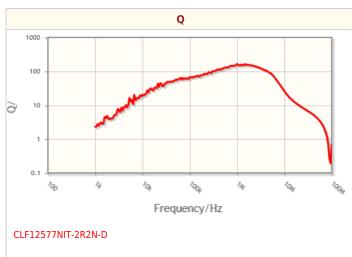



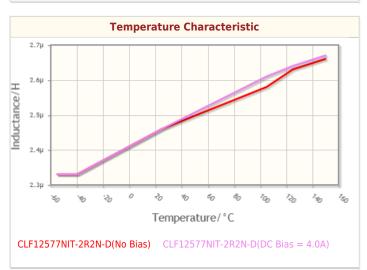

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.



CLF12577NIT-2R2N-D











Associated Images





[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.