



GENERAL PURPOSE APPLICATION.  
SWITCHING APPLICATION.

### FEAUTRES

- Excellent  $h_{FE}$  Linearity :  $h_{FE(2)}=25(\text{Min.})$   
at  $V_{CE}=6V, I_C=400mA.$
- Complementary to KTA2015.

### MAXIMUM RATINGS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	35	V
Collector-Emitter Voltage	$V_{CEO}$	30	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	500	mA
Base Current	$I_B$	50	mA
Collector Power Dissipation	$P_C$	100	mW
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55 ~ 150	$^\circ C$

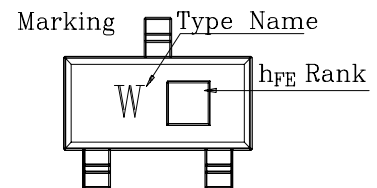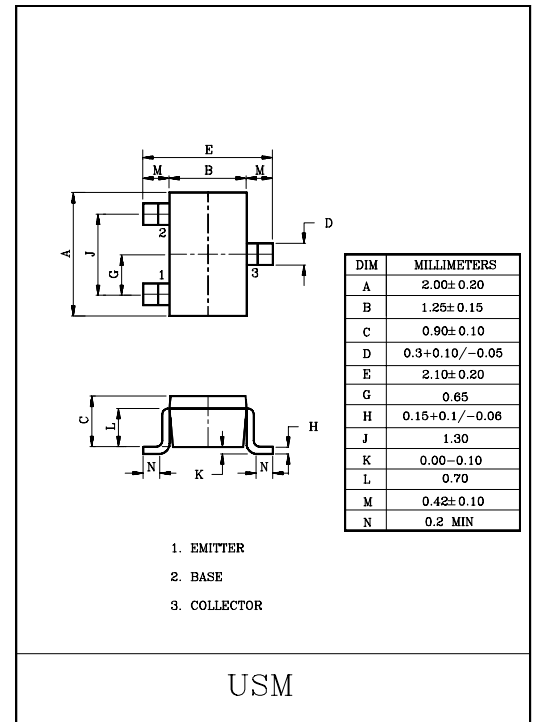

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=35V, I_E=0$	-	-	0.1	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	0.1	$\mu A$
DC Current Gain (Note)	$h_{FE(1)}$	$V_{CE}=1V, I_C=100mA$	70	-	240	
	$h_{FE(2)}$	$V_{CE}=6V, I_C=400mA$	25	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	0.1	0.25	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=1V, I_C=100mA$	-	0.8	1.0	V
Transition Frequency	$f_T$	$V_{CE}=6V, I_C=20mA$	-	300	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CE}=6V, I_E=0, f=1MHz$	-	7.0	-	pF

Note)  $h_{FE(1)}$  Classification    O(2) : 70~140,    Y(4) : 120~240  
 $h_{FE(2)}$  Classification    O : 25Min,    Y : 40Min.