


BF 01/02/07/06/05/04: Radial Leads



CPM-83 — (pitch = 5.08mm / 0.200 inches)

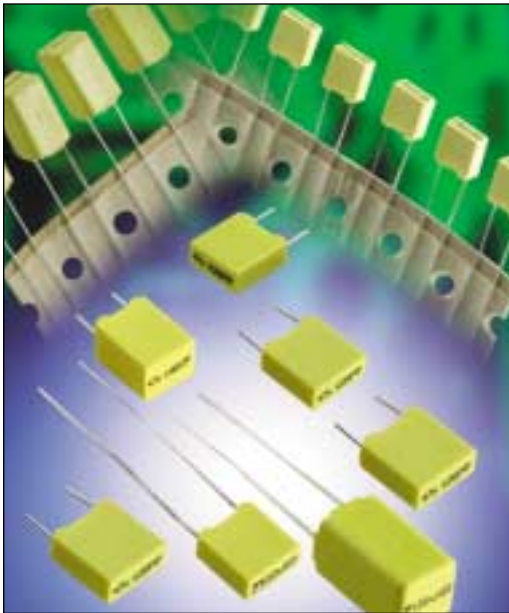

GENERAL DESCRIPTION

- Dielectric: Metallized polyester film (polyethylene terephthalate)
- Stacked-film
- Leads: Radial tin-plated wire
- Protection: Plastic case (UL94: V-O) / Epoxy resin
- Marking: Logo
Nominal Capacitance
Tolerance (EIA)
DC Nominal Voltage
Example: **T 100 nK 63**
- Delivery Mode: Bulk
Taped (reel or ammpack)

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151

Complies with special specification:

CECC 30401-063


APPLICATIONS

- Commodity Product:
 - Supply decoupling
 - Filter
 - Integrators
 - Treatment of analog signals
 - Rejection of line perturbations etc.

DIMENSIONS

millimeters (inches)

Case	L max	H max	e max	$\phi \pm 0.02$
01	7.50 (0.295)	6.50 (0.256)	2.50 (0.098)	0.50 (0.020)
02	7.50 (0.295)	8.00 (0.315)	3.20 (0.126)	0.50 (0.020)
07	7.50 (0.295)	8.00 (0.315)	5.00 (0.197)	0.50 (0.020)
06	7.50 (0.295)	9.60 (0.378)	6.00 (0.236)	0.50 (0.020)
05	7.50 (0.295)	12.0 (0.472)	6.00 (0.236)	0.50 (0.020)
04	7.50 (0.295)	13.0 (0.512)	7.50 (0.295)	0.50 (0.020)

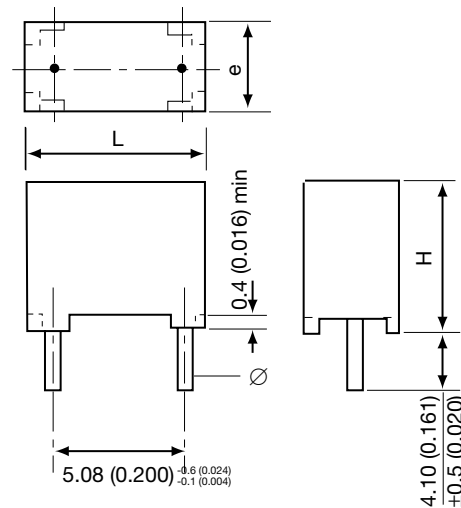

*L dimension measured 3mm above base of case

HOW TO ORDER

BF01

Type

4

Class

PET

D

Voltage

63V

0104

Capacitance Value

EIA code

K

Tolerance

$\pm 10\%$

--

Suffix



BF 01/02/07/06/05/04: Radial Leads



CPM-83 — (pitch = 5.08mm / 0.200 inches)

PERFORMANCE CHARACTERISTICS

Climatic Category	55/100/56 Performance Class 2
Capacitance Range	C_R 1nF to 2.2 μ F (E12)
Tolerances on C_R	$\pm 5\%$; $\pm 10\%$ (other values on request)
Nominal Voltages	VR_ 63/100/250/400V VR~ 40/ 63/160/200V
Category Voltage	$V_c = 0.8V_{R-}$ at 100°C
Test Voltage	$V_e = 1.6V_{R-}/2s$ at 25°C

• Tangent of Loss Angle: D.F.

Measurement Frequency	Capacitance	DF: Performance Category 2
1kHz	$C_R \leq 1\mu F$	$\leq 1.0\%$
100 Hz	$C_R > 1\mu F$	$\leq 1.0\%$


• Insulation Resistance: IR

Measuring Points	$C_R \leq 0.33\mu F$		$C_R > 0.33\mu F$	
	IR min (G Ω)		IR * C_R min (M Ω * μF)	
	Performance Class 2		Performance Class 2	
Between Terminals	$V_{R-} \leq 100V$	$V_{R-} > 100V$	$V_{R-} \leq 100V$	$V_{R-} > 100V$
	3.75	7.5	1.25	2.5
Between Terminals and Ground	$\geq 30,000 M\Omega$			
	V_{R-}			
	63	100	250	400
	(dv/dt) _R max	38	40	110
		40	110	270

PACKAGING

millimeters (inches)

	Panasert	Avisert
H	16.5 \pm 0.30 (0.65 \pm 0.012)	19.5 \pm 0.50 (0.768 \pm 0.020)

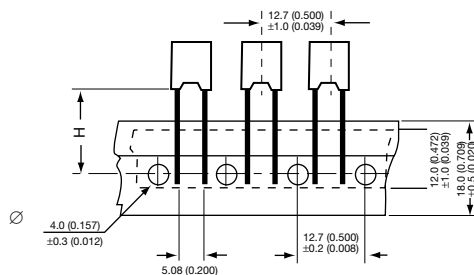

Thermoadhesive tape ▲
(Other sizes according to standard CEI : 286-2)
Dimensions: millimeters (inches)

Case	Quantity				
	Reel		Ammopack		Bulk
Suffix x	DB panasert	DD avisert	DA panasert	DC avisert	USA Std. / Europe / Asia Std.
01	2500		2500		1000 / 5000
02	1800		2000		1000 / 3800
07	1200		1250		1000 / 2500
06	900		1100		1000 / 1500
05	900		1100		1000 / 1500
04	750		750		1000 / 1000

BF 01/02/07/06/05/04: Radial Leads



CPM-83 — (pitch = 5.08mm / 0.200 inches)

CAPACITANCE VALUE (C_R) and NOMINAL VOLTAGES (V_R)

Capacitance Range (C_R)	Reference			
	BF			
	V_R / V_{R-} (V)			
	63/40 (voltage code: D)	100/63 (voltage code: E)	250/160 (voltage code: G)	400/200 (voltage code: I)
1,000 pF	BF01	BF01	BF01	BF01
1,200	BF01	BF01	BF01	BF01
1,500	BF01	BF01	BF01	BF01
1,800	BF01	BF01	BF01	BF01
2,200 pF	BF01	BF01	BF01	BF01
2,700	BF01	BF01	BF01	BF01
3,300	BF01	BF01	BF01	BF01
3,900	BF01	BF01	BF01	BF01
4,700 pF	BF01	BF01	BF01	BF01
5,600	BF01	BF01	BF01	BF01
6,800	BF01	BF01	BF01	BF01
8,200	BF01	BF01	BF01	BF01
10,000 pF	BF01	BF01	BF01	BF01
12,000	BF01	BF01	BF01	BF02
15,000	BF01	BF01	BF01	BF02
18,000	BF01	BF01	BF01	BF02
22,000	BF01	BF01	BF01	BF02
27,000	BF01	BF01	BF01	BF07
33,000	BF01	BF01	BF02	BF07
39,000	BF01	BF01	BF02	BF06
47,000 pF	BF01	BF01	BF02	BF06
56,000	BF01	BF01	BF07	BF04
68,000	BF01	BF01	BF07	BF04
82,000	BF01	BF01	BF07	BF04
100 nF	BF01	BF01	BF07	BF04
120	BF01	BF01	BF06	
150	BF01	BF01	BF06	
180	BF01	BF07/***BF02	BF04	
220 nF	BF01	BF07/***BF02	BF04	
270	BF02	BF07		
330	BF02	BF07		
390	BF07/***BF02	BF07		
470 nF	BF07/***BF02	BF07		
560	BF07	BF05*		
680	BF07	BF05*		
820	BF07	BF05*		
1 μ F	BF07	BF05		
1.5 μ F	BF05*			
2.2 μ F	BF05**			

*Upon request - no change

**Upon request & only available 50 V (U_R) - no change

***Case size reduction: BF07 to BF02 - New

BF04/BF06: New

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.



A KYOCERA GROUP COMPANY

USA

AVX Myrtle Beach, SC Corporate Offices

Tel: 843-448-9411
FAX: 843-626-5292

AVX Northwest, WA

Tel: 360-669-8746
FAX: 360-699-8751

AVX North Central, IN

Tel: 317-848-7153
FAX: 317-844-9314

AVX Mid/Pacific, MN

Tel: 952-974-9155
FAX: 952-974-9179

AVX Southwest, AZ

Tel: 480-539-1496
FAX: 480-539-1501

AVX South Central, TX

Tel: 972-669-1223
FAX: 972-669-2090

AVX Southeast, NC

Tel: 919-878-6223
FAX: 919-878-6462

AVX Canada

Tel: 905-564-8959
FAX: 905-564-9728

AVX Limited, England European Headquarters

Tel: ++44 (0) 1252 770000
FAX: ++44 (0) 1252 770001

AVX S.A., France

Tel: ++33 (1) 69.18.46.00
FAX: ++33 (1) 69.28.73.87

AVX GmbH, Germany - AVX

Tel: ++49 (0) 8131 9004-0
FAX: ++49 (0) 8131 9004-44

EUROPE

AVX GmbH, Germany - Elco

Tel: ++49 (0) 2741 2990
FAX: ++49 (0) 2741 299133

AVX srl, Italy

Tel: ++390 (0)2 614571
FAX: ++390 (0)2 614 2576

AVX Czech Republic, s.r.o.

Tel: ++420 (0)467 558340
FAX: ++420 (0)467 558345

ASIA-PACIFIC

AVX/Kyocera, Singapore Asia-Pacific Headquarters

Tel: (65) 258-2833
FAX: (65) 350-4880

AVX/Kyocera, Hong Kong

Tel: (852) 2-363-3303
FAX: (852) 2-765-8185

AVX/Kyocera, Korea

Tel: (82) 2-785-6504
FAX: (82) 2-784-5411

AVX/Kyocera, Taiwan

Tel: (886) 2-2696-4636
FAX: (886) 2-2696-4237

AVX/Kyocera, China

Tel: (86) 21-6249-0314-16
FAX: (86) 21-6249-0313

AVX/Kyocera, Malaysia

Tel: (60) 4-228-1190
FAX: (60) 4-228-1196

Elco, Japan

Tel: 045-943-2906/7
FAX: 045-943-2910

Kyocera, Japan - AVX

Tel: (81) 75-604-3426
FAX: (81) 75-604-3425

Kyocera, Japan - KDP

Tel: (81) 75-604-3424
FAX: (81) 75-604-3425