



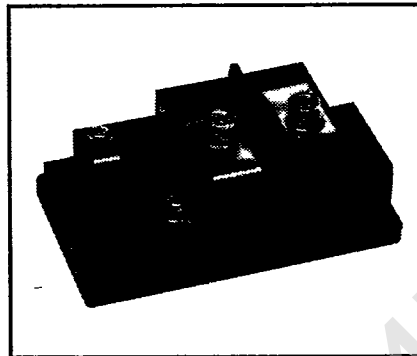

KS624540A41

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Avenue G, Durand, BP107, 72003 Le Mans, France (43) 41.14.14

Single Darlington Transistor Module
400 Amperes/600 Volts

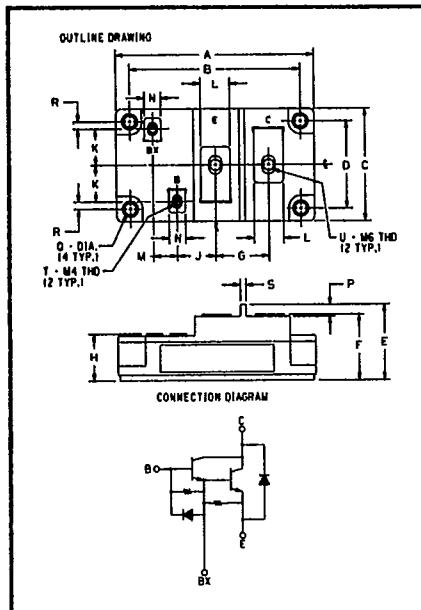

KS624540A41
Single Darlington Transistor Module
 400 Amperes/600 Volts

Description

Powerex Single Darlington Transistor Modules are designed for use in switching applications. The modules are isolated consisting of one Darlington Transistor with a reverse parallel connected high-speed diode and a base emitter speed up diode.

Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feed-Back Diode
- High Gain (h_{FE})
- Base Emitter Speed Up Diode

Applications:

- Inverters
- DC Motor Control
- Switching Power Supplies
- AC Motor Control
- Welders

600 Volts, KS624540A41
Outline Drawing

Dimension	Inches	Millimeters
A	4.252 Max.	108 Max.
B	3.661 ± .012	93 ± 0.3
C	2.441 Max.	62 Max.
D	1.890 ± .012	48 ± 0.3
E	1.634 Max.	41.5 Max.
F	1.417 Max.	36 Max.
G	1.142	29
H	1.004	25.5 Max.
J	.827	21
K	.787	20
L	.630	16
M	.512	13
N	.354	9
P	.256	6.5
Q	.256 Dia.	6.5 Dia.
R	.157	4
S	.118	3
T	M4 Metric	M4
U	M6 Metric	M6

Ordering Information

Example: Select the complete eleven digit module part number you desire from the table — i.e. KS624540A41 is a 450 $V_{CE0(SUS)}$ (600 V_{CEV}), 400 Ampere Single Darlington Module.

Type	$V_{CE0(SUS)}$ Volts (x10)	Current Rating Amperes (x10)
KS62	45	40

www.DataSheet4U.com



T-33-35

Powerex, Inc., Hills Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Avenue G, Durand, BP107, 72003 Le Mans, France (43) 41.14.14

KS624540A41

Single Darlington Transistor Module

400 Amperes/600 Volts

Maximum Ratings, $T_C=25^\circ\text{C}$ unless otherwise specified

	Symbol	KS624540A41	Units
Junction Temperature	T_J	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 to 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage	$V_{CE(SUS)}$	450	Volts
Collector-Emitter Sustaining Voltage $V_{BE} = -2\text{V}$	$V_{CE(SUS)}$	600	Volts
Collector-Base Voltage	V_{CBO}	600	Volts
Emitter-Base Voltage	V_{EBO}	7	Volts
Collector-Emitter Voltage $V_{BE} = -2\text{V}$	V_{CEV}	600	Volts
Continuous Collector Current	I_C	400	Amperes
Diode Forward Current	I_{FM}	400	Amperes
Continuous Base Current	I_B	18	Amperes
Diode Surge Current	I_{FSM}	4000	Amperes
Power Dissipation	P_T	1380	Watts
Maximum Mounting Torque M6 Terminal Screws (E, C)	—	26	in.-lb.
Maximum Mounting Torque M4 Terminal Screws (B, Bx)	—	12	in.-lb.
Maximum Mounting Torque M6 Mounting Screws	—	26	in.-lb.
Module Weight	—	470	Grams
V Isolation	V_{RMS}	2500	Volts



T-33-35

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Avenue G, Durand, BP107, 72003 Le Mans, France (43) 41.14.14

KS624540A41

Single Darlington Transistor Module

400 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_c=25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	KS624540A41			Units
			Min.	Typ.	Max.	
Collector Cutoff Current	I_{CEV}	$V_{CE} = 600V, V_{BE} = -2V$	—	—	4	mA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 7V$	—	—	700	mA
DC Current Gain	h_{FE}	$I_C = 400A, V_{CE} = 5.0V$	70	—	—	—
Diode Forward Voltage	V_{FM}	$I_{FM} = 400A$	—	—	1.85	Volts
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = 400A, I_B = 8A$	—	—	2.0	Volts
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C = 400A, I_B = 8A$	—	—	2.5	Volts
Resistive Turn On	t_{on}	$V_{CC} = 300V$	—	—	3.0	μs
Load Storage Time	t_s	$I_C = 400A$	—	—	12	μs
Switch Times Fall Time	t_f	$I_{B1} = -I_{B2} = 8.0A$	—	—	3.0	μs
Thermal Resistance, Case to Sink Lubricated	$R_{\theta CS}$	—	—	—	.04	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	Transistor Part	—	—	.09	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	Diode Part	—	—	.3	$^\circ\text{C/W}$




Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272


Powerex Europe, S.A., 428 Avenue G, Durand, BP107, 72003 Le Mans, France (43) 41.14.14

KS624540A41
Single Darlington Transistor Module
 400 Amperes/600 Volts


DC CURRENT GAIN (TYPICAL)

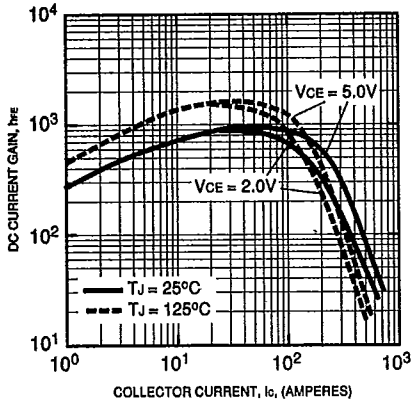


SATURATION VOLTAGE (TYPICAL)

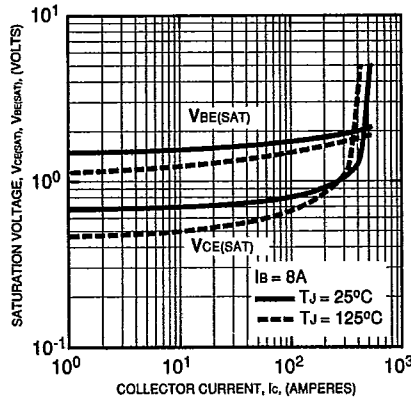


COMMON EMITTER OUTPUT CHARACTERISTICS (TYPICAL)

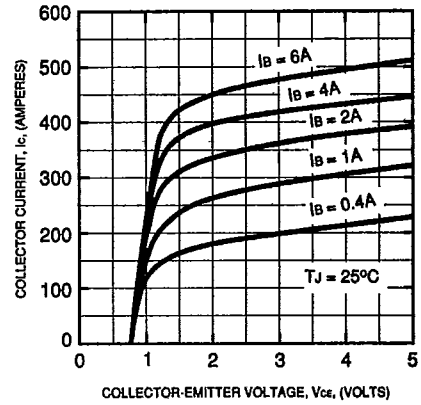


SWITCHING CHARACTERISTICS (TYPICAL)

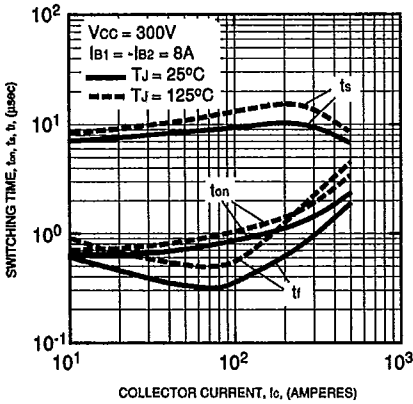


COLLECTOR-EMITTER SATURATION VOLTAGE (TYPICAL)

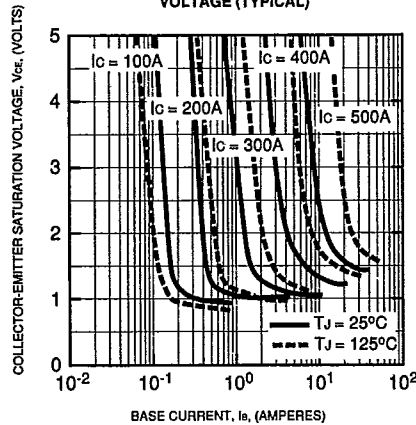

DIODE CHARACTERISTICS (TYPICAL)

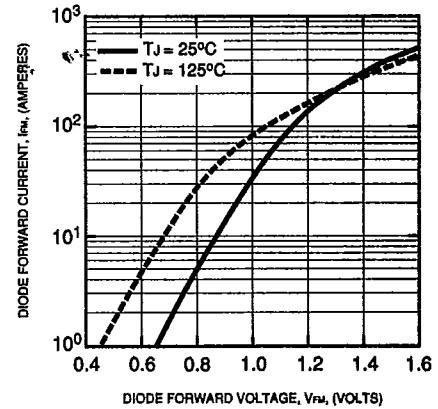

REVERSE BIAS SAFE OPERATING AREA (R. B. S. O. A.)

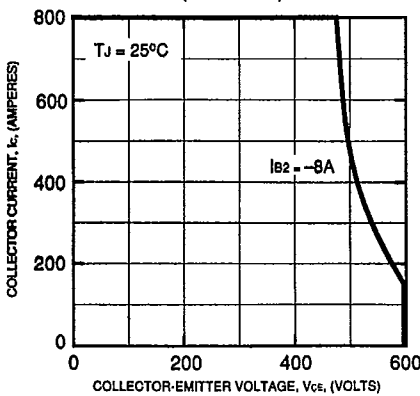

DERATING FACTOR OF S.O.A.

