

1 AMP MINIATURE BRIDGE RECTIFIERS


FEATURES

- PRV Ratings from 50 to 1000 Volts
 - Surge overload rating to 50 Amps peak
 - Reliable low cost molded plastic construction
 - Ideal for printed circuit board applications
 - **UL RECOGNIZED - FILE #E124962**
- ## MECHANICAL DATA
- Case: Molded plastic, U/L Flammability Rating 94V-0
 - Terminals: Rectangular pins
 - Soldering: Per MIL-STD 202 Method 208 guaranteed
 - Polarity: Marked on case
 - Mounting Position: Any
 - Weight: 0.05 Ounces (1.3 Grams)

MECHANICAL SPECIFICATION

ACTUAL SIZE OF THE DI PACKAGE

SERIES DI100 - DI110

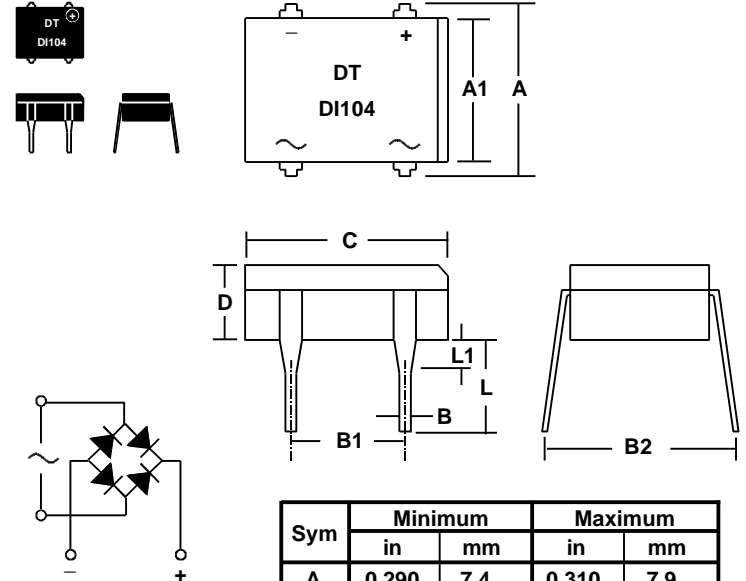

Sym	Minimum		Maximum	
	in	mm	in	mm
A	0.290	7.4	0.310	7.9
A1	0.245	6.2	0.255	6.5
B	0.016	0.41	0.020	0.51
B1	0.195	5.0	0.205	5.2
B2	0.300	7.6	0.350	8.9
C	0.355	9.3	0.365	9.3
D	0.125	3.2	0.135	3.4
L	0.155	3.9	0.165	4.3
L1	0.060*	1.5*		


* This dimension is "Typical".

MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS							UNITS
		DI100	DI101	DI102	DI104	DI106	DI108	DI110	
Series Number									
Maximum DC Blocking Voltage	V _{RM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	
Maximum Peak Recurrent Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	
Average Forward Rectified Current @ T _A = 40 °C	I _O	1							AMPS
Peak Forward Surge Current (8.3ms single half sine wave superimposed on rated load)	I _{FSM}	50							
Maximum Forward Voltage (Per Diode) at 1 Amp DC	V _{FM}	1.1							VOLTS
Maximum Average DC Reverse Current @ T _A = 25 °C	I _{RM}	5.0							μA
At Rated DC Blocking Voltage @ T _A = 100 °C		0.5							mA
Maximum Thermal Resistance, Junction to Ambient (Note 1)	R _{θJA}	40							°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150							°C

NOTES: (1) Thermal resistance from junction to ambient with bridge mounted on PC Board with 0.5x0.5 in copper pads



1 AMP MINIATURE BRIDGE RECTIFIERS

RATING & CHARACTERISTIC CURVES FOR SERIES DI100 - DI110

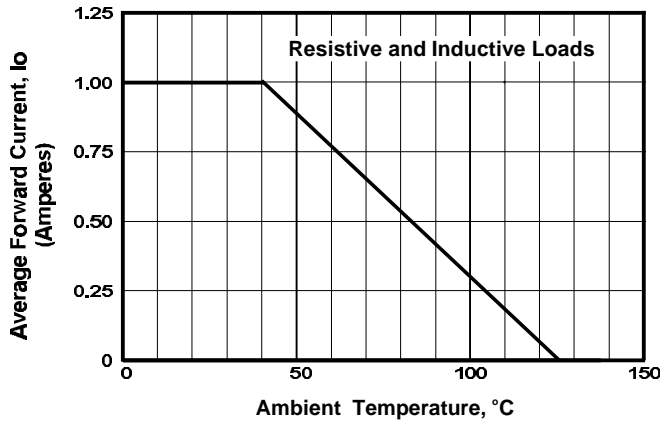


FIGURE 1. FORWARD CURRENT DERATING CURVE

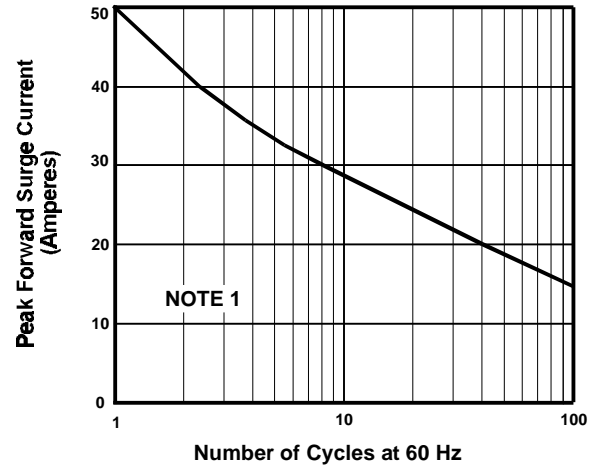


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

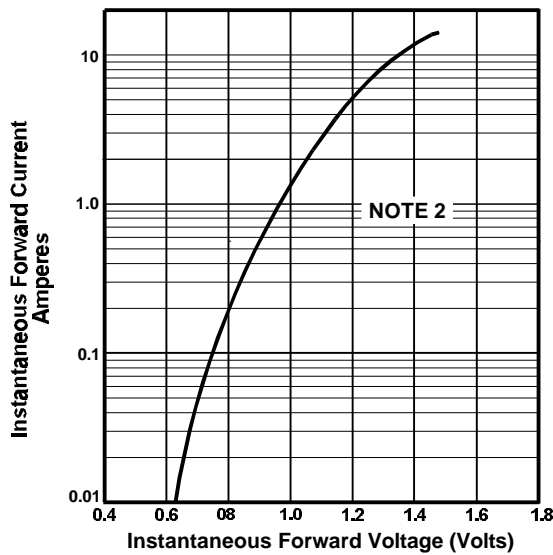


FIGURE 3. TYPICAL FORWARD CHARACTERISTIC PER DIODE

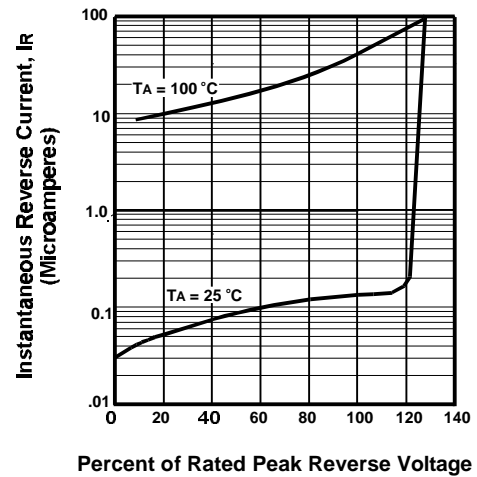


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

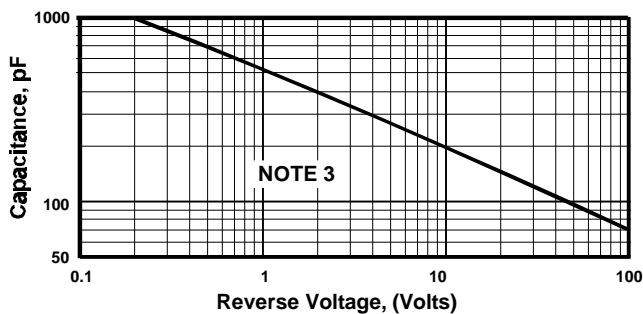


FIGURE 5. TYPICAL JUNCTION CAPACITANCE PER DIODE

NOTES

- (1) JEDEC Method, 8.3 mSec. Single Half Sine Wave; $T_J = 150^\circ\text{C}$
- (2) $T_J = 25^\circ\text{C}$; Pulse Width = 300 μSec , 1% Duty Cycle
- (3) $T_J = 25^\circ\text{C}$; $f = 1\text{ MHz}$