

Infrared Receiver Module

2-02-04-16 Preliminary

Module No.: PIC-3068SMB

455kHz High Speed


1. Features:

- Carrier frequency: 455kHz
- Miniature size
- Built-in exclusive IC
- Continuous Signal Acceptable
- High protection ability to EMI
- Back Metal Cover with Mesh
- Side view
- High data rate up to 25kbit/s
- Fast response
- Enhanced immunity against noise & disturbance from energy saving lamps

2. Applications

- ▣ Wireless keyboard, mouse, game pads, data terminals
- ▣ Data communication
- ▣ Supplementary to IrDA

Dimensions

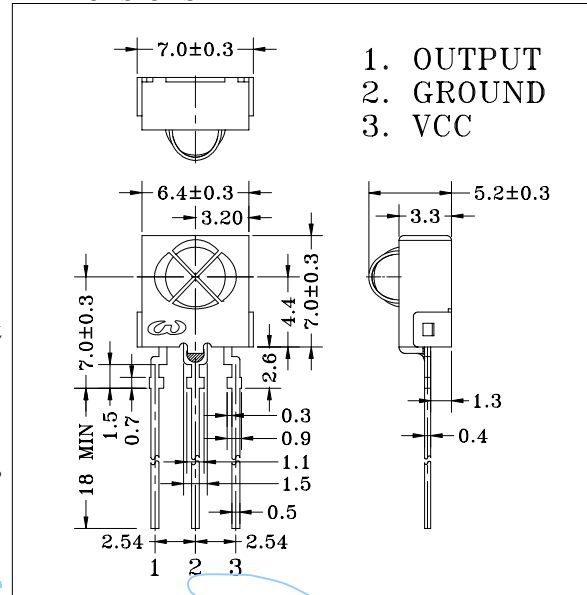

3. Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Ratings	Unit
Supply Voltage	Vcc	7.0	V
Operating Temperature	Topr	-10 ~ +60	°C
Storage Temperature	Tstg	-20 ~ +75	°C
Soldering Temperature *1	Tsol	240	°C

*1 At the position of 2mm from the bottom of the package within 5 seconds.

4. Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply voltage	Vcc		3.8		6.5	V
Current Consumption	Icc	Input Signal = 0		1.1	1.5	mA
Reception Distance	d	200±5Lux	2	4		m
Half Angle	Δθ			±45		deg
B.P.F. Center Frequency	Fo		430	455	480	kHz
Peak Wavelength	λp			940		nm
Signal Output	So		--- Active Low ---			
High Level Output Voltage	Voh		Vcc-0.5			V
Low Level Output Voltage	Vol			0.2	0.4	V
High Level Pulse Width	Twh	Burst Wave = 22μs	6.5	22	37.5	μs
Low Level Pulse Width	Twl		6.5	22	37.5	μs

5. Reliability Test Items


(Ta=25°C)

Test Items	Test Conditions	Ratings
High Temperature Storage	Ta=60°C, Vcc=5.0V	t=240hr.
Low Temperature Storage	Ta=-10°C, Vcc=5.0V	t=240hr.
High Temperature High Humid Storage	Ta=60°C, 90%RH, Vcc=5.0V	t=240hr.
Temperature Cycling	-20°C (30min) ~ +75°C (30min)	20 cycles
Soldering Heat	240±5°C	5 sec.


Infrared Receiver Module

Module No.: PIC-3068SMB


Relative Reception Distance vs Transmitter Carrier Frequency

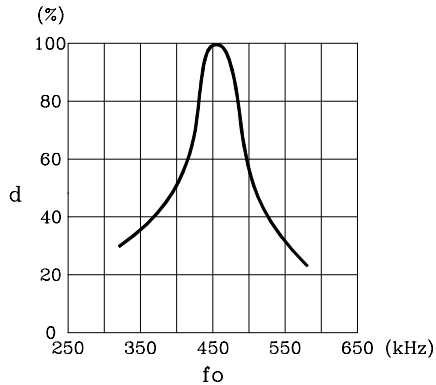


Sensitivity Diagram

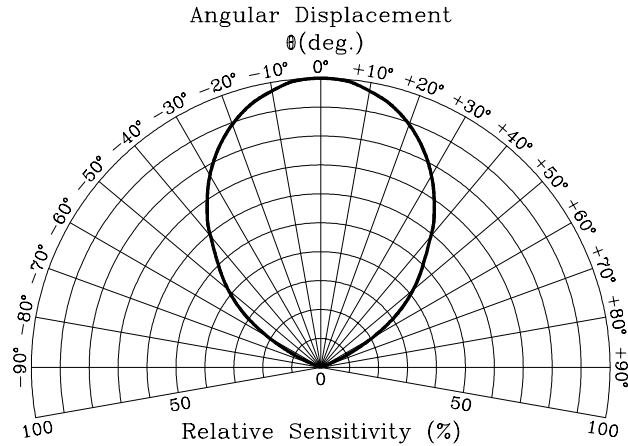

In case of noisy power supply, please serially insert 100Ω resistor and about 47μF electrolytic capacitor in Vcc line and ground as follows:-

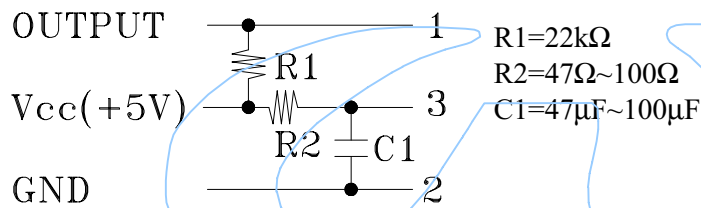

Block Diagram

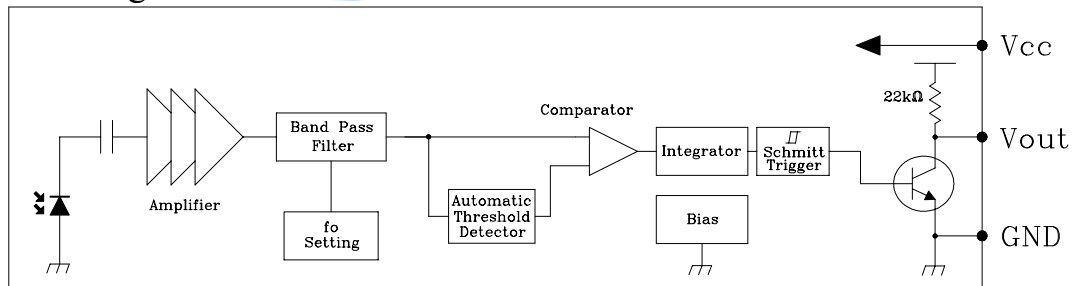

Standard Inspection

Among electrical characteristics, total quantity will be inspected as below:-

- ⊙ Distance between emitter and detector
- ⊙ Current consumption
- ⊙ H level output voltage
- ⊙ L level output voltage

Infrared Receiver Module

Module No.: PIC-3068SMB

Testing Method

Distance between emitter and detector specifies maximum distance that output waveform satisfies the standard (FIG-3) under the conditions below against the standard transmitter.

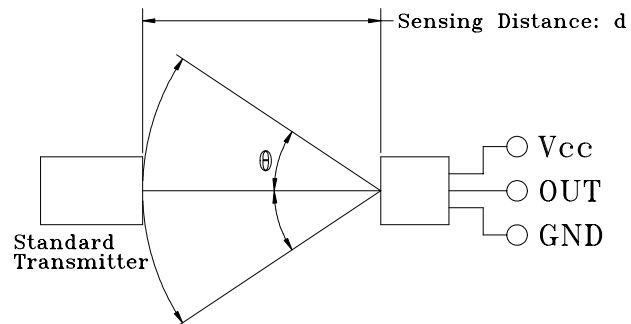


FIG-1

a. Measuring place

Indoor without extreme reflection of light.

b. Ambient light source

Detecting surface illumination is $200 \pm 5 \text{ Lux}$ under ordinary white fluorescence lamp of no high frequency lightning.

c. Standard transmitter

Transmitter wave indicated in FIG-2 of standard transmitter is arranged to satisfy $V_o \geq 100 \text{ mVp-p}$ under the measuring circuit specified in FIG-3

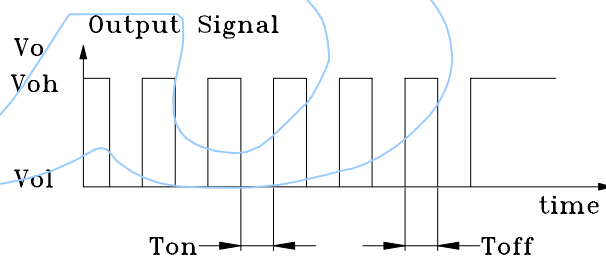
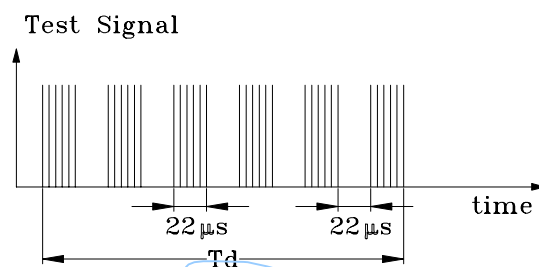


FIG-2

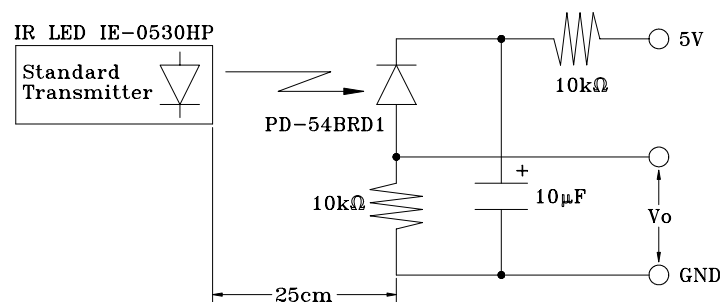


FIG-3 Power Output Measurement Circuit

Precautions for Use

- Store and use where there is no force causing transformation or change in quality.
- Store and use where there is no corrosive gas or sea (salt) breeze.
- Store and use where there is no extreme humidity.
- Solder the lead pin within the condition of ratings. After soldering, do not add exterior force.
- Do not wash this device. Wipe the stains of diode side with a soft cloth. You can use the solvent, ethyl alcohol, or methyl alcohol only.
- To prevent static electricity damage to the pre-amp, make sure that the human body, the soldering iron are connected to ground before using.