

# M6027 & M6028 Series


## 3.2 x 5 mm, 3.0 Volt, Clipped Sinewave, TCXO/TCVCXO

- Ultra-miniature size
- Ideal for handheld and portable devices





Ordering Information		M6027/M6028					1	H	F	S	N	00.0000	MHz
Product Series													
M6027 = TCXO													
M6028 = TCVCXO													
Temperature Range													
1: 0°C to +70°C													
6: -20°C to +70°C													
8: 0°C to +50°C													
A: -10°C to +60°C													
F: -30°C to +75°C													
Stability													
H: ±2.5 ppm													
L: ±5 ppm													
Frequency Control													
F: Fixed for TCXO													
V: Voltage Tuned for TCVCXO													
Output Type													
S: Clipped Sinewave													
Package/Lead Configurations													
N: Leadless													
Frequency (customer specified)													


M6027Sxxx & M6028Sxxx - Contact factory for datasheets.

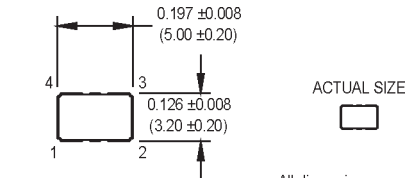

ACTUAL SIZE  
All dimensions in inches (mm).



SUGGESTED SOLDER PAD LAYOUT



### Pin Connections

PIN	FUNCTION
1	N/C or Control Voltage
2	Ground/Case
3	Output
4	+Vdd

	PARAMETER	SYMBOL	UNITS	
Electrical Specifications	Frequency Range	F	12.6 to 26 MHz	
	Frequency Stability Over Operating Temperature	?F/F	(See Ordering Information)	
	Frequency Vs. Supply Voltage		±0.3 Max. ppm	
	Frequency Vs. Aging		±1.0/year max @ +25°C Ppm	
	Input Voltage	V <sub>dd</sub>	+3.0 ±5% V	
	Input Current	I <sub>dd</sub>	2 Max. mA	
	Output Type		Clipped Sinewave	
	Output Level		0.8 pk-pk min. V	
	Output Load		10K    10pF	
	Frequency Tuning		±5 to ±15 over control voltage range ppm (M6028 only)	
	Control Voltage	V <sub>c</sub>	1.5 ±1.0 V (M6028 only)	
	Phase Noise (Typical)	10 Hz -80	100 Hz   1 kHz   10 kHz -110   -130   -145	dBc/Hz
	Environmental	Mechanical Shock		Per MIL-STD-202, Method 213, Condition C
		Vibration		Per MIL-STD-202, Method 201 & 204
Max Soldering Conditions			See Solder Profile, Figure 1	
Hermeticity			Per MIL-STD-202, Method 112 (1x10 <sup>-8</sup> atm.cc/s of helium)	
Solderability			Per EIAJ-STD-002	

Clipped Sinewave Load – see load circuit diagram #7

# MtronPTI Lead Free Solder Profile

