




# Series

PART NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY
MSV - 0505	5 VDC	5 VDC	200 mA	70 %
MSV - 0509		9 VDC	111 mA	75 %
MSV - 0512		12 VDC	84 mA	80 %
MSV - 0515		15 VDC	66 mA	82 %
MSV - 0505D		±5 VDC	±100 mA	70 %
MSV - 0509D		±9 VDC	±56 mA	75 %
MSV - 0512D		±12 VDC	±42 mA	78 %
MSV - 0515D		±15 VDC	±33 mA	80 %
MSV - 1205		12 VDC	5 VDC	200 mA
MSV - 1209	9 VDC		111 mA	75 %
MSV - 1212	12 VDC		84 mA	80 %
MSV - 1215	15 VDC		66 mA	82 %
MSV - 1205D	±5 VDC		±100 mA	70 %
MSV - 1209D	±9 VDC		±56 mA	75 %
MSV - 1212D	±12 VDC		±42 mA	78 %
MSV - 1215D	±15 VDC		±33 mA	80 %
MSV - 1505	15 VDC		5 VDC	200 mA
MSV - 1509		9 VDC	111 mA	75 %
MSV - 1512		12 VDC	84 mA	80 %
MSV - 1515		15 VDC	66 mA	82 %
MSV - 1505D		±5 VDC	±100 mA	70 %
MSV - 1509D		±9 VDC	±56 mA	75 %
MSV - 1512D		±12 VDC	±42 mA	78 %
MSV - 1515D		±15 VDC	±33 mA	80 %
MSV - 2405		24 VDC	5 VDC	200 mA
MSV - 2409	9 VDC		111 mA	75 %
MSV - 2412	12 VDC		84 mA	80 %
MSV - 2415	15 VDC		66 mA	82 %
MSV - 2405D	±5 VDC		±100 mA	70 %
MSV - 2409D	±9 VDC		±56 mA	75 %
MSV - 2412D	±12 VDC		±42 mA	78 %
MSV - 2415D	±15 VDC		±33 mA	80 %

## MSV - 1 WATT

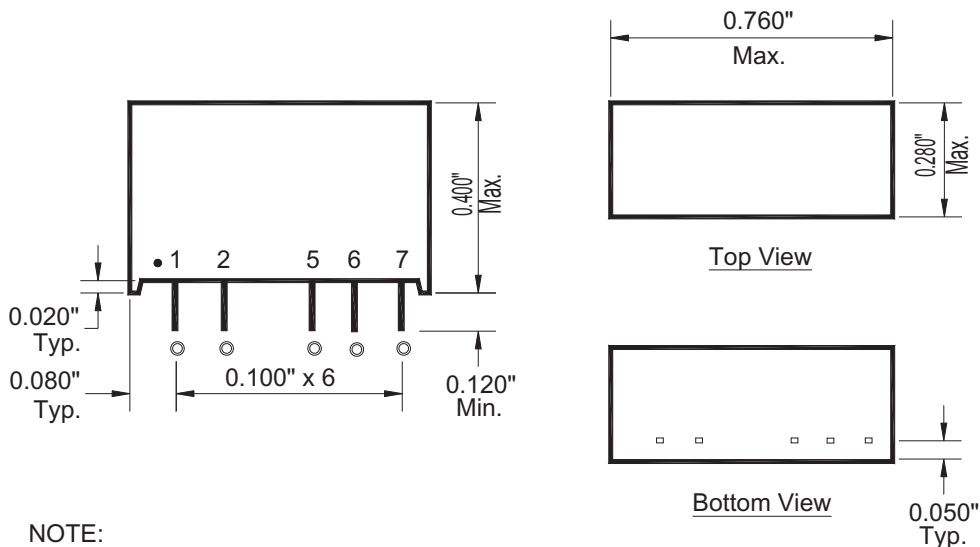

### MSV - 1 WATT

#### Pin Connections

PIN	SINGLE	DUAL
1	+INPUT	+INPUT
2	-INPUT	-INPUT
5	-OUTPUT-	-OUTPUT
6	NO PIN	COMMON
7	+OUTPUT	+OUTPUT

#### NOTE:

\*TERMINAL 0.020" x 0.010" FLAT PIN


#### NOTE:

All specifications typical and nominal / full load and 25°C unless otherwise noted.  
 Avoid sustained operation in overload or dead short conditions.  
 Specifications subject to changes without notice.

# Series

PART NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY
MSVH - 0505	5 VDC	5 VDC	400 mA	75 %
MSVH - 0509		9 VDC	222 mA	75 %
MSVH - 0512		12 VDC	167 mA	78 %
MSVH - 0515		15 VDC	133 mA	80 %
MSVH - 0505D		±5 VDC	±200 mA	70 %
MSVH - 0509D		±9 VDC	±111 mA	75 %
MSVH - 0512D		±12 VDC	±84 mA	78 %
MSVH - 0515D		±15 VDC	±66 mA	80 %
MSVH - 1205	12 VDC	5 VDC	400 mA	82 %
MSVH - 1209		9 VDC	222 mA	78 %
MSVH - 1212		12 VDC	167 mA	80 %
MSVH - 1215		15 VDC	133 mA	85 %
MSVH - 1205D		±5 VDC	±200 mA	74 %
MSVH - 1209D		±9 VDC	±111 mA	75 %
MSVH - 1212D		±12 VDC	±84 mA	80 %
MSVH - 1215D		±15 VDC	±66 mA	82 %
MSVH - 1505	15 VDC	5 VDC	400 mA	78 %
MSVH - 1509		9 VDC	222 mA	78 %
MSVH - 1512		12 VDC	167 mA	80 %
MSVH - 1515		15 VDC	133 mA	80 %
MSVH - 1505D		±5 VDC	±200 mA	70 %
MSVH - 1509D		±9 VDC	±111 mA	75 %
MSVH - 1512D		±12 VDC	±84 mA	80 %
MSVH - 1515D		±15 VDC	±66 mA	82 %
MSVH - 2405	24 VDC	5 VDC	400 mA	80 %
MSVH - 2409		9 VDC	222 mA	80 %
MSVH - 2412		12 VDC	167 mA	84 %
MSVH - 2415		15 VDC	133 mA	85 %
MSVH - 2405D		±5 VDC	±200 mA	75 %
MSVH - 2409D		±9 VDC	±111 mA	78 %
MSVH - 2412D		±12 VDC	±84 mA	80 %
MSVH - 2415D		±15 VDC	±66 mA	82 %

## 2 WATT

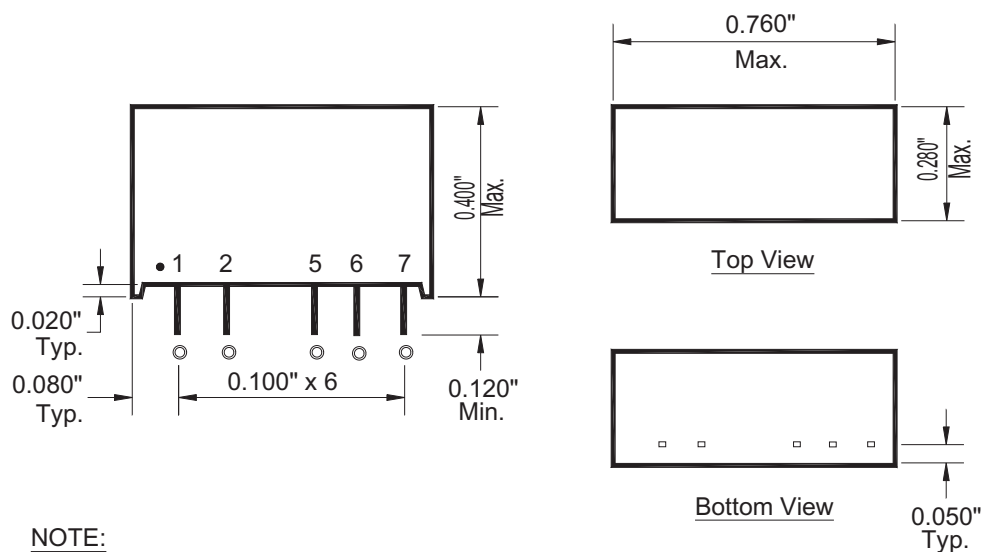

### MSVH - 2 WATTS

#### Pin Connections

PIN	SINGLE	DUAL
1	+INPUT	+INPUT
2	-INPUT	-INPUT
5	-OUTPUT-	-OUTPUT
6	NO PIN	COMMON
7	+OUTPUT	+OUTPUT

#### NOTE:

\*TERMINAL 0.020" x 0.010" FLAT PIN

#### NOTE:

All specifications typical and nominal / full load and 25°C unless otherwise noted.  
 Avoid sustained operation in overload or dead short conditions.  
 Specifications subject to changes without notice.