

1 →

Video

2 →

Audio

← **1** →

Data

SDI Video, Audio and Serial Data Transmission

The OTS-1SD2DA1DTR provides for the digital transmission of 1 Channel of uncompressed SDI Video, 2 Channels of AES/EBU Audio and 1 Channel of duplex Serial Data, at absolute broadcast quality.

System Design


All units come in an insert card version. The cards can be inserted into our 16-slot, 19" rack-mountable card cage (OT-CC-16-100) or one of our smaller Optiva™ Desktop Card Racks (OT-DTCR Series).

The Optiva™ Desktop Card Racks can handle one, two or four insert cards, creating compact, mountable, stand alone systems. The use of separate OT-DTCR enclosures allows for future flexibility and expansion as all cards are hot-swappable and can be used in any enclosure. Each one of our card housing units operate with an appropriate power supply. See "Accessories" for power supply specifications.


Optiva™ Upgrade Path

This system can be purchased without an optical port as an add-on to an existing Optiva™ system daisy-chain. (See "Non-Optical Version" below).

The Optiva™ bandwidth requirement of this system is 346 Mbps.

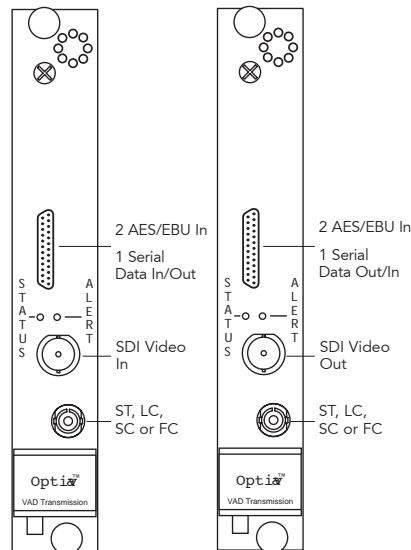

OTS-1SDT2DAT1DTR OTS-1SDR2DAR1DRT



Each insert card comes with a label identifying the specific protocols handled, connector pin-out and other vital information.

For optimal bandwidth allocation, each insert card can daisy-chain with an additional card in the same chassis. See "Optiva™ Upgrade Path".

Features

- Uncompressed SDI Video over one fiber
- TDM - Single Wavelength
- Complies with SMPTE 259 for uncompressed SDI
- Compatible with MDM-7000 Series for WDM and CWDM multiplexing
- No EMI or RFI and no ground loops
- Stand alone or rack-mount
- Ideal for Broadcast/Studio and Professional AV applications

Versions Available*

Wavelength (nm) & Fiber	Transmit/Receive**	Receive/Transmit**	Optical Connector	Optical Budget (dB)	Range*** (km)	Form Factor
1310/1550 Multimode	OTS-1SDT2DAT1DTR-A2/A3M-XX-IC	OTS-1SDR2DAR1DRT-A3M/A2-XX-IC	ST, FC, LC or SC	10	3	IC (1-slot)
1310/1550 Singlemode	OTS-1SDT2DAT1DTR-A2/A3-XX-IC	OTS-1SDR2DAR1DRT-A3/A2-XX-IC	ST, FC, LC or SC	12	20	IC (1-slot)
1310/1550 SM (D)	OTS-1SDT2DAT1DTR-A2/A3D-XX-IC	OTS-1SDR2DAR1DRT-A3D/A2-XX-IC	ST, FC, LC or SC	17	40	IC (1-slot)
1310/1550 SM (H)	OTS-1SDT2DAT1DTR-A2/A3H-XX-IC	OTS-1SDR2DAR1DRT-A3H/A2-XX-IC	ST, FC, LC or SC	25	60	IC (1-slot)
1270-1610 SM (CWDM)	OTS-1SDT2DAT1DTR-L4/L4-XX-IC	OTS-1SDR2DAR1DRT-L4/L4-XX-IC	ST, FC, LC or SC	Varies	20-70	IC (1-slot)
Non-Optical Version	OTS-1SDT2DAT1DTR-NOC-IC	OTS-1SDR2DAR1DRT-NOC-IC	N/A	N/A	N/A	IC (1-slot)

Serial Data Codes - "D" indicates RS-232. For other Serial Data preferences, please use: "DJ" = RS-422; "DK" = RS-485 (2W); and "DW" = RS-485 (4W).

* Contact Opticomm for other versions available.

** XX indicates the type of optical connector. Each of ST, FC, LC or SC are available.

*** Chromatic dispersion and additional losses should be taken into account.

Video

Standard	SMPTE 259
Pathological test code	RP-178
Bit rate	270 Mbps
Bit error rate	10 ⁻¹⁴
Connector	BNC (IEC 60169-8)

Audio

Digital Format	AES/EBU AES3-1992 (ANSI S4,40) SMPTE 276M
Connector	Micro DB25

Data

Connector	Micro DB25
RS-232, RS-422	
Data Rate	DC to 1 Mbps
RS-485 (2 Wire)	
Data Rate	DC to 1 Mbps
RS-485 (4 Wire)	
Data Rate	DC to 1 Mbps

General

Dimensions & Weight	Insert Card (IC): 6.3" L x 0.8" W x 4.0" H	11 oz
Operating temperature	-20° C to +55° C	
Storage temperature	-40° C to +85° C	
Humidity	0 to 95% non-condensing	
Operating voltage	9-12 V _{DC}	
Consumption	1 Amp Max per Insert Card	
System Latency	Less than 1ms (Audio <10ms)	

Local Monitoring LED Status Indication

Remote Monitoring Compatible with OptivaView™
SNMP Management Suite

Optiva™ Configurable
Communication Platform

Network Management

SDI & HD-SDI

Composite Video,
Audio & Data

RGB/VGA/DVI

Audio/FSK/Intercom

Data (Ethernet/Serial/USB)

CATV/RF & L-Band

Optical Switching, Routing
& Redundancy

Passive Multiplexing
Solutions

Enclosures, Racks
& Frames

Power Supplies
& Accessories

10 **ISO**
YEAR **9001:2000**
WARRANTY **CERTIFIED**



FCC PART 15
COMPLIANT

MADE IN THE USA

Sample Configuration

