

*OUTPUT VOLTAGE	OUTPUT CURRENT	OUTPUT POWER	MODEL NUMBER		
			9-18 VDC IN	18-36 VDC IN	36-72 VDC IN
3.3 VDC	2500 mA	8W	TC4-8S123.3	TC4-8S243.3	TC4-8S483.3
5 VDC	2000 mA	10W	TC4-10S1205	TC4-10S2405	TC4-10S4805
12 VDC	830 mA	10W	TC4-10S1212	TC4-10S2412	TC4-10S4812
15 VDC	666 mA	10W	TC4-10S1215	TC4-10S2415	TC4-10S4815
+24 VDC	416 mA	10W	TC4-10S1224	TC4-10S2424	TC4-10S4824
±5 VDC	±1000 mA	10W	TC4-10D1205	TC4-10D2405	TC4-10D4805
±12 VDC	±415 mA	10W	TC4-10D1212	TC4-10D2412	TC4-10D4812
±15 VDC	±333 mA	10W	TC4-10D1215	TC4-10D2415	TC4-10D4815
±24 VDC	±208 mA	10W	TC4-10D1224	TC4-10D2424	TC4-10D4824

*Contact the factory for other outputs.

ELECTRICAL SPECIFICATIONS

All Specifications Typical @+25°C, Nominal Line, and Full Load Unless Otherwise Noted.

INPUT SPECIFICATIONS


Nominal Line, 9-18V Input.....12 VDC
 18-36V Input.....24 VDC
 36-72V Input.....48 VDC
 Input Filter.....Capacitors

OUTPUT SPECIFICATIONS

Voltage Accuracy.....±1%, Max.
 Voltage Balance, Dual Output.....±1%
 Line Regulation.....±0.5%, Max.
 Load Regulation, FL-25%FL.....±0.5%, Max.
 Minimum Load.....5%
 Ripple and Noise, 20MHz BW.....150mVp-p, Max.
 Short Circuit Protection.....Continuous
 Short Circuit Restart.....Automatic

GENERAL SPECIFICATIONS

Efficiency.....85%, Typ.
 Isolation Voltage, Input to Output.....1,500 VDC, Min.
 Switching Frequency.....200 KHz, Typ.
 Operating Temperature Range.....-25°C to +71°C
 Case Temperature.....100°C Max.
 Derating.....None
 Storage Temperature Range.....-40°C to +125°C
 Cooling.....Free Air Convection
 Safety Standards.....Meets UL 1950, EN60950, IEC950
 EMI/RFI.....Five-Side Shielded Case
 Conducted EMI.....Meets FCC Class A, EN55022 Class A
 Case Material.....Metal with Non-Conductive Base

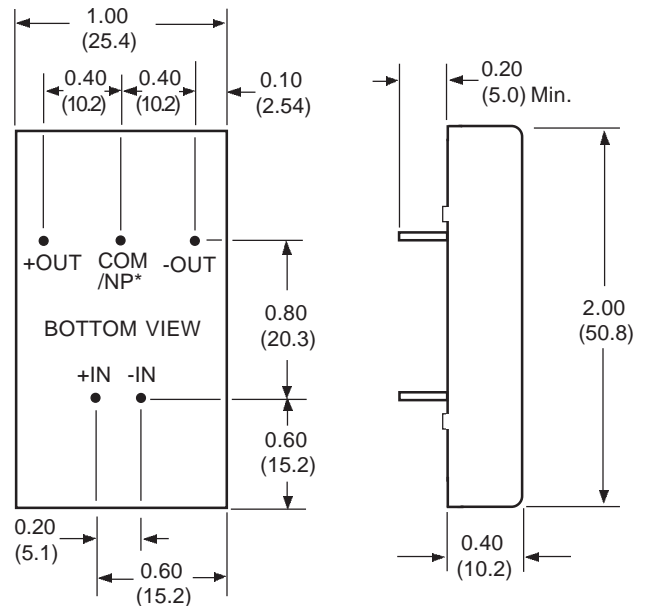

* NP (NO PIN) ON SINGLE OUTPUT MODELS

PIN SIZE: 0.04 INCH (1.0 mm) DIA.

ALL DIMENSIONS IN INCHES (mm)