

# SPDT RF SWITCH

## MODEL TWD2206

Package: 14 Pin DIP (DP3)

Also Available In: Connectorized Housings

### Features

- 5 - 4000 MHz
- RF1, RF2 Terminated in 'OFF' State
- Integral CMOS Driver
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available


### Maximum Ratings

Ambient Operating Temperature ..... -55°C to +100 °C  
 Storage Temperature ..... -65°C to +125 °C  
 Case Temperature ..... +125 °C  
 DC Voltage ..... +6.0 Volts  
 Continuous RF Input Power ..... +30 dBm

### Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 3000 MHz	5 - 3000 MHz
Insertion Loss (dB)		
5 - 1000 MHz	1.5	1.8 Max.
5 - 2000 MHz	1.9	2.2 Max.
5 - 3000 MHz	2.5	2.8 Max.
Isolation (dB)		
5 - 1000 MHz	65	60 Min.
5 - 2000 MHz	55	50 Min.
5 - 3000 MHz	32	30 Min.
VSWR "ON"/"OFF"		
5 - 1000 MHz	1.25:1	1.5:1 Max.
5 - 2000 MHz	1.6:1	2.0:1 Max.
5 - 3000 MHz	1.6:1	2.0:1 Max.
1dB Compression (dBm)		
50 MHz	+18.5	+18.0 Min.
500 - 3000 MHz	+24.0	+22.0 Min.
Switching Speed (ns) (50% TTL to 90% RF)	60	70 Max.
DC Bias (mA) (4.5 to 5.5 VDC)	0.025	1.0 Max.

### Pin Layout

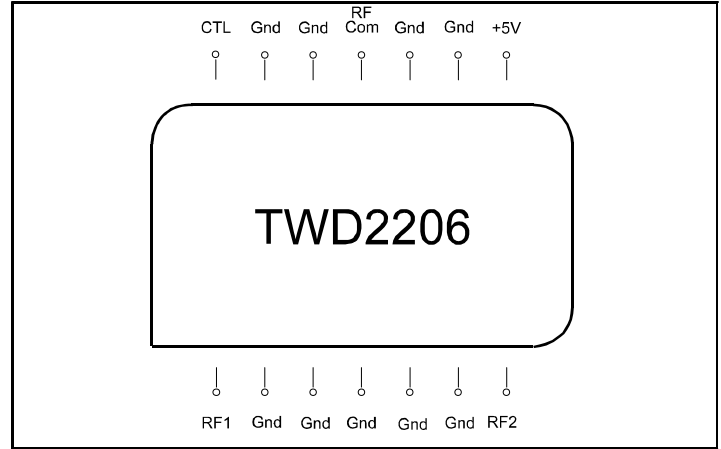


### Truth Table

Control Input	Switch Position
TTL	RF Common Connected To
0	RF1
1	RF2

Note: Care should always be taken to effectively ground the case of each

### Typical Performance Data

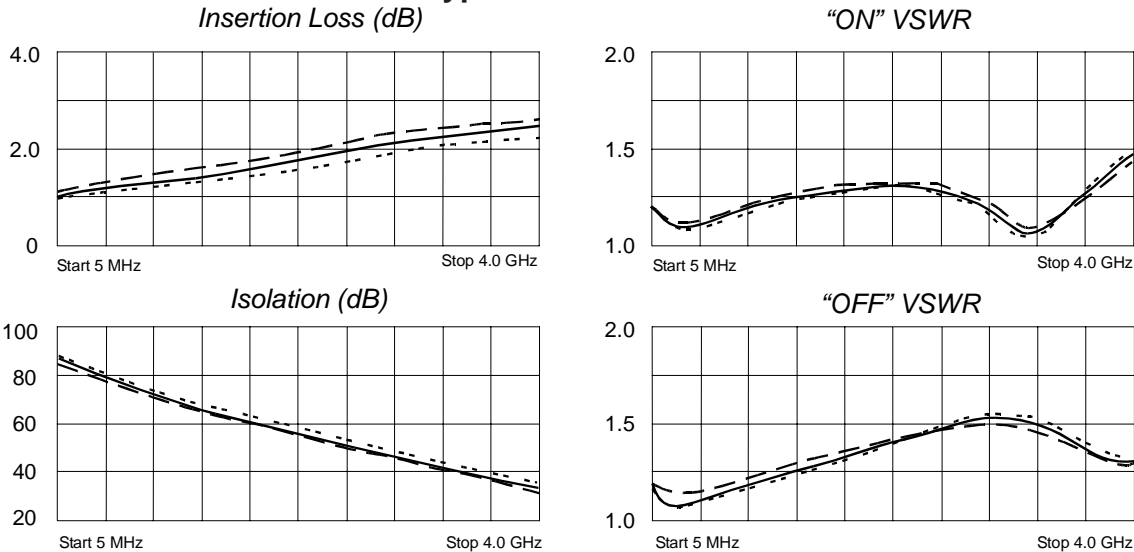

Legend ——— + 25 °C - - - - +85 °C ······ -55 °C



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 Rev. 3/28/08

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001