



1. Mechanical:

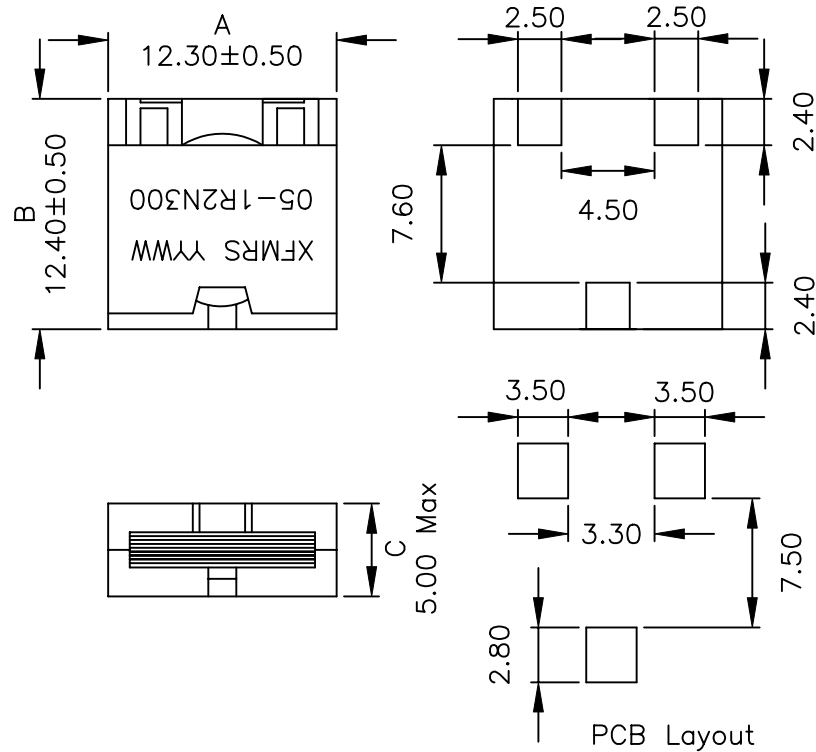

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: -40°C to $+85^{\circ}\text{C}$

2. Schematic:



3. Electrical Specifications: @25°C

OCL: $1.2\mu\text{H} \pm 30\%$ @100KHz, 0.25V, 0DC
 CURRENT: 30.0 ADC Max
 DC Res.: 1.50mOhms Max

DOC. REV: A/1

XFMR5 Inc	Title: SM INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25	P/N: XF121205-1R2N300	REV. A
Dimensions in mm	DWN. 李小锋	CHK. 廖玉坤	Jan-26-03
SHEET 1 OF 1	APP. BW		Jan-26-03