


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
G	86				E	REVISED PER 0L20-0060-96	04OCT96	OKS DMS

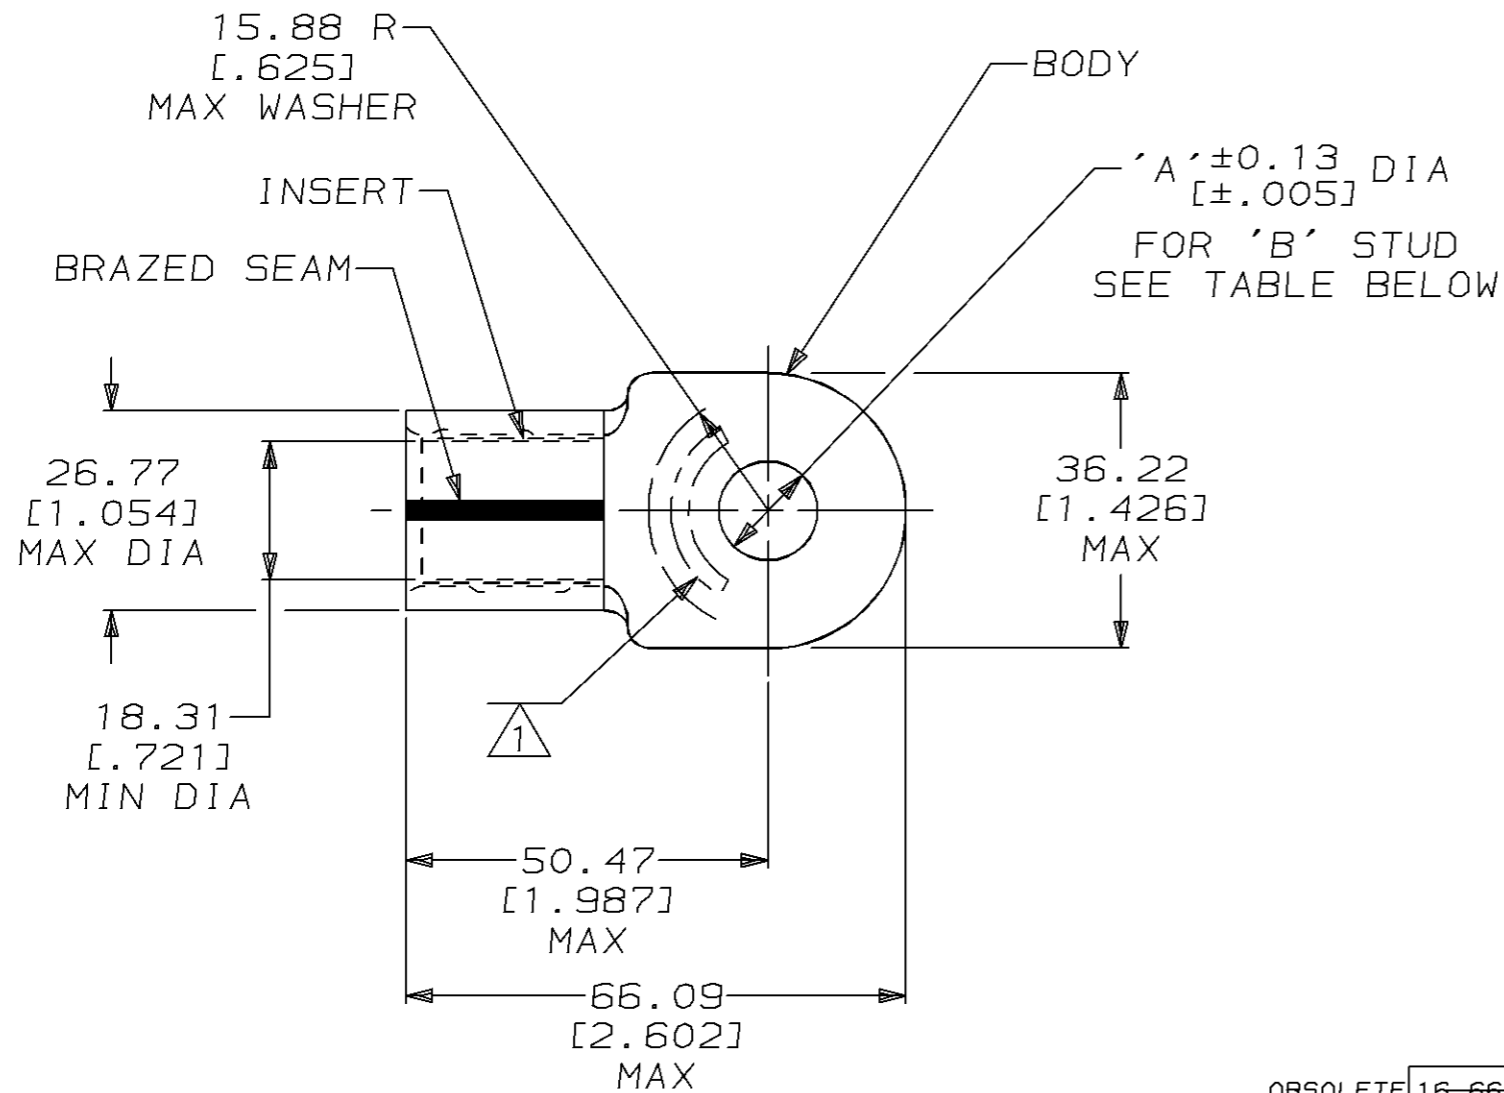

1 STAMP AMP 250-300 MCM APPROX AS SHOWN
 2 MATERIAL THK: 3.20 ± 0.10 [.126 ± .004]

OBSOLETE	'A'	'B'	MATERIAL	PART NO
16.66 [.656]	5/8		BODY: COPPER PER ASTM B-152 TIN PL 0.00254 [.000100] MIN THK PER MIL-T-10727	52559-5
13.08 [.515]	1/2			52559-4
11.51 [.453]	7/16		INSERT: BRASS PER MIL-C-50 TIN PL 0.00254 [.000100] MIN THK PER MIL-T-10727	52559-3
9.91 [.390]	3/8			52559-2
8.33 [.328]	5/16			52559-1
6.73 [.265]	1/4			52559

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -		DR 08MAR95 DK SCHRUM CHK 09MAR95 AJ KAUFMAN APPD 09MARG5 RE ROSER APPD 09MARG5 JL MECKLEY PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		AMP AMP Incorporated Harrisburg, PA 17105-3608	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE		MATERIAL COPPER PER ASTM B-152 ANNEALED		NAME TERMINAL, RING TONGUE, STRANDED/SOLID, COPALUM™, WIRE SIZE: 300-350 MCM		SIZE B	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 117.0-152.0mm² [231-300] MCM SOLID OR STRANDED		FINISH TIN PLATE 0.00254 [.000100] MIN THK PER MIL-T-10727		CAGE CODE 00779		DRAWING NO C-52559	
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				SCALE 1:1		SHEET 1 OF 1	