

Miniature Power Relay PTF

- 2 pole 15 A, 2 CO contacts
- DC or AC coil
- Plug-in version, PCB or chassis mount version

Applications

Panel boards, domestic appliances



F0281-B

Approvals

VDE REG.-Nr. A379, cULus E58304
 Technical data of approved types on request

Contact data

Contact configuration	2 CO contacts
Contact set	single contact
Type of interruption	micro disconnection
Rated voltage / max. switching voltage AC	240 / 400 VAC
Rated current	10 A / 250 VAC 15 A / 120 VAC
Maximum breaking capacity AC	2500 VA / 250 VAC 1800 VA / 120 VAC
Limiting making capacity, max 20 ms	20 A / 250 VAC 30 A / 120 VAC
Contact material	AgNi90/10
Minimum contact load	5V/100mA
Rated frequency of operation with / without load	6/600 min ⁻¹
Operate- / release time DC coil	max 15 / 10 ms
Bounce time DC coil NO / NC contact	max 5 / 5 ms

Contact ratings

Type	Contact	Load	Ambient temp. [°C]	Cycles
IEC 61810				
PT F2 DC-coil	CO	15 A, 250 VAC, cosφ=1	70°C	35x10 ³
PT F2 AC-coil	CO	15 A, 250 VAC, cosφ=1	70°C	6x10 ³
UL 508				
PT F2	NO / NC	10 A, 250 VAC, resistive	70°C	100x10 ³
PT F2	NO / NC	15 A, 120 VAC, resistive	70°C	100x10 ³


Coil data

Rated coil voltage range DC coil	6...220 VDC
AC coil	6...230 VAC
Operative range to IEC 61810 DC coil, AC-coil 50Hz	2
AC coil 60 Hz at 70°C, % of U _{rid}	90..110%


Coil versions, DC-coil

Coil code	STD	LED bipolar	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ohm	Rated coil power mW
006	L06		6	4.5	0.6	48±10%	750
012	L12		12	9.0	1.2	192±10%	750
024	L24		24	18.0	2.4	777±10%	741
048	L48		48	36.0	4.8	3072±10%	750
060	L60		60	45.0	6.0	4845±12%	743
110	M10		110	82.5	11.0	16133±15%	750
220	N20		220	165.0	22.0	64533±15%	750

All figures are given for coil without preenergization, at ambient temperature +23°C

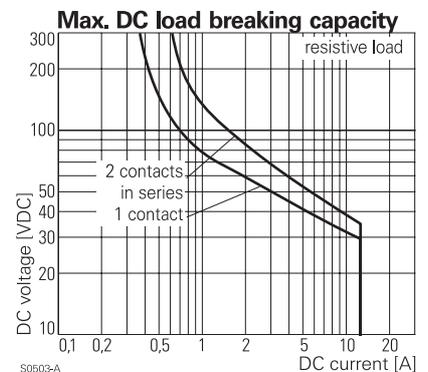

S0503-A

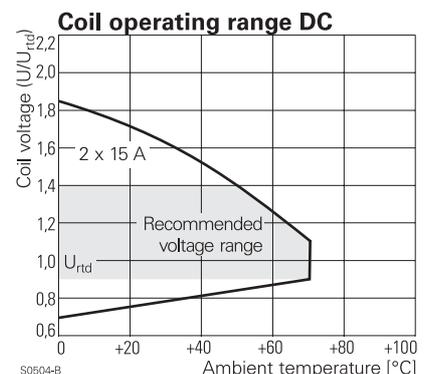

S0504-B

Miniature Power Relay PTF (Continued)

Coil versions, AC-coil 50 / 60 Hz

Coil code	LED	Rated voltage	Operate voltage	Release voltage	Coil resistance	Rated coil power
		VAC	50 / 60 Hz	50 / 60 Hz	Ohm	50 / 60 Hz VA
506	R06	6	4.8 / 5.4	1.8	11±10%	1.0 / 0.85
512	R12	12	9.6 / 10.8	3.6	48±10%	1.0 / 0.85
524	R24	24	19.2 / 21.6	7.2	192±10%	1.0 / 0.79
548	R48	48	38.4 / 43.2	14.4	777±10%	1.0 / 0.87
560	R60	60	48.0 / 54.0	18.0	1306±10%	1.0 / 0.87
615	S15	115	92.0 / 103.5	34.5	4845±12%	1.0 / 0.86
730	T30	230	184.0 / 207.0	69.0	19465±15%	1.0 / 0.90

All figures are given for coil without preenergization, at ambient temperature +23°C


Insulation

Dielectric strength coil-contact circuit	2500 V _{rms}
open contact circuit	1200 V _{rms}
adjacent contact circuits	2500 V _{rms}
Clearance / creepage coil-contact circuit	≥ 3.1 / 3.1 mm
adjacent contact circuits	≥ 4.4 / 8.8 mm
Material group of insulation parts	IIIa
Insulation to IEC 61810-1	
Type of insulation coil-contact circuit	basic
open contact circuit	micro disconnection
adjacent contact circuits	basic
Rated insulation voltage	250 V
Pollution degree	2
Rated voltage system	230 / 400 V
Overvoltage category	III

Other data

Mechanical endurance DC coil	20x10 ⁶ cycles
AC coil	15x10 ⁶ cycles
Material	
RoHS - Directive 2002/95/EC	compliant
Environment	
Ambient temperature range	-40...+70°C
Vibration resistance (function) NO / NC contact	7 / 4 g
Shock resistance (function) NO / NC contact	20 / 5 g
Category of protection	RTII - flux proof
Processing	
Resistance to soldering heat	270°C / 10 s
Relay weight	30 g
Packaging unit	20 pcs


Coil operating range AC

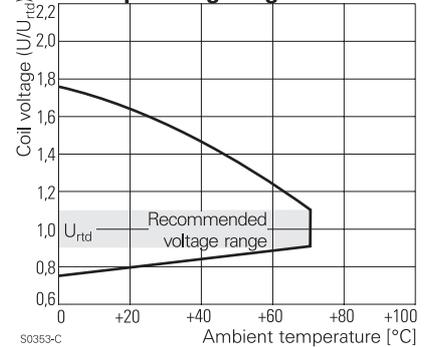


S0353-C

PCB layout / terminal assignment

Bottom view on pins

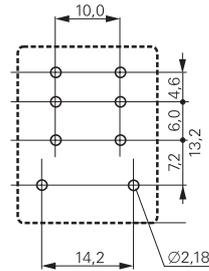


S0507-AA



S0507-AB


Dimensions

Solder- and plug-in terminals (standard version)

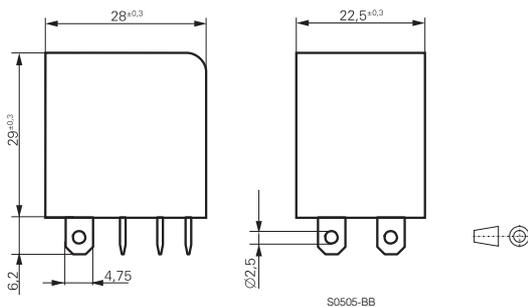

S0505-BB

PCB version

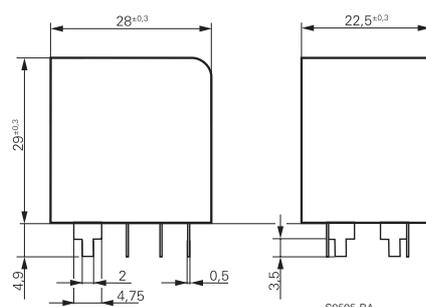


S0505-BA

Miniature Power Relay PTF (Continued)

Dimensions

Flange mount version

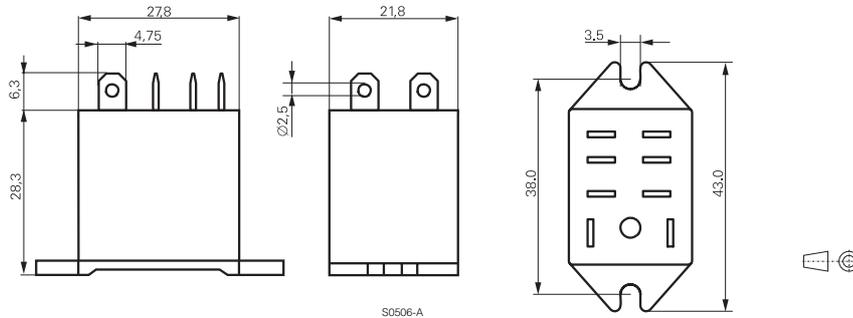

Product key

Typical product key

PTF 2 0 524

Type

PTF Miniature Power Relay PTF

Contact material

2 AgNi 90/10

Version

- 0** Quick connect terminals
- 1** PCB terminals
- 2** Flange mount cover

Coil

Coil code: please refer to coil versions table, preferred types in bold print

Product key	Contacts	Cont. material	Terminal	Coil	Coil	Part number	
PTF20024	2 CO contacts	AgNi 90/10	quick connect term.	DC-coil	24 VDC	1461937-3	
PTF21024			PCB		1-1461937-0		
PTF20524			quick connect term.	AC-coil	24 VAC	1461938-3	
PTF20615					115 VAC	1461938-7	
PTF20730			230 VAC	1461938-9			
PTF21524			PCB	24 VAC	1-1461938-2		
PTF21615				115 VAC	1-1461938-6		
PTF21730			230 VAC	1-1461938-8			
PTF20L24			quick connect term.	DC + LED	24 VDC	1461944-3	
PTF20R24					AC + LED	24 VAC	1461945-3
PTF20S15			flange mount cover			115 VAC	1461945-7
PTF20T30						230 VDC	1461945-9
PTF22024	DC-coil	24 VDC				1721058-3	
PTF22524	AC-coil	24 VAC				1-1721058-0	
PTF22615				115 VAC	1-1721058-4		
PTF22730				230 VAC	1-1721058-6		