



**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**

**B4006**  
**959.5 MHz**  
**914.5 MHz**

**Data Sheet**


Ceramic package **QCC 8B**

**Features**

- Compact RF duplexer for cordless telephone CT1
- No matching network required for operation at 50 Ω
- Ceramic package for **Surface Mounted Technology (SMT)**

**Terminals**


- Ni , gold-plated

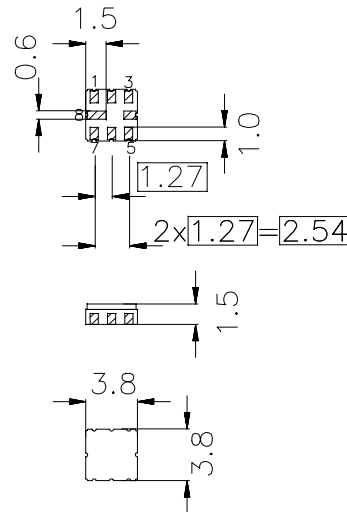

Dimensions in mm, approx. weight 0.07 g

**Pin configuration**

- |      |                        |
|------|------------------------|
| 6    | Ant                    |
| 1    | Port 1                 |
| 3    | Port 2                 |
| 5, 7 | Ant - ground           |
| 2    | Port 1 - ground        |
| 4,8  | Case / Port 2 - ground |

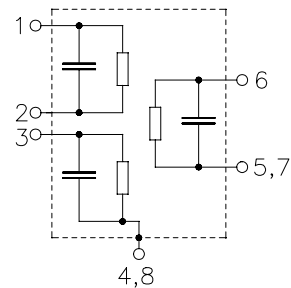

Type	Ordering code	Marking and Package according to	Packing according to
B4006	B39961-B4006-Z810	C61157-A7-A46	F61074-V8037-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T_A$	0 /+ 60	°C
Storage temperature range	$T_{stg}$	- 40/+ 85	°C
DC voltage	$V_{DC}$	3	V
Input power	$P_{IN}$	17	dBm



**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**

**B4006**  
**959.5 MHz**  
**914.5 MHz**

**Data Sheet**

**Characteristics channel 1 (Port 1 - Ant)**

Operable temperature range:  $T_A = 0$  to  $+60^\circ\text{C}$   
 Ant term. impedance  $Z_{\text{Ant}} = 50 \Omega$   
 Port 1 term. impedance  $Z_{\text{Port 1}} = 50 \Omega$   
 Port 2 term. impedance  $Z_{\text{Port 2}} = 50 \Omega$

		min.	typ.	max.	
<b>Center frequency</b>	$f_c$	—	959.5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\text{max}}$	—	3.3	4.0	dB
	959.00 ... 960.00 MHz				
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0.7	2.0	dB
	959.00 ... 960.00 MHz				
<b>Absolute attenuation</b>	$\alpha$				
	450.00 ... 850.00 MHz	50	61	—	dB
	850.00 ... 917.20 MHz	36	39	—	dB
	917.20 ... 938.60 MHz	32	35	—	dB
	938.60 ... 949.30 MHz	8	18	—	dB
	969.70 ... 970.70 MHz	10	25	—	dB
	970.70 ... 980.40 MHz	17	27	—	dB
	980.40 ... 981.40 MHz	32	40	—	dB
	981.40 ... 1001.80 MHz	26	32	—	dB
	1001.80 ... 1002.80 MHz	30	36	—	dB
	1015.00 ... 1050.00 MHz	50	54	—	dB
	1050.00 ... 1350.00 MHz	43	48	—	dB
	1350.00 ... 1850.00 MHz	26	29	—	dB
	1850.00 ... 2000.00 MHz	21	26	—	dB



**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**

**B4006**  
**959.5 MHz**  
**914.5 MHz**

**Data Sheet**

**Characteristics channel 2 (Port 2 - Ant)**

Operable temperature range:  $T_A = 0$  to  $+60^\circ\text{C}$   
 Ant term. impedance  $Z_{Ant} = 50 \Omega$   
 Port 1 term. impedance  $Z_{Port 1} = 50 \Omega$   
 Port 2 term. impedance  $Z_{Port 2} = 50 \Omega$

		min.	typ.	max.	
<b>Center frequency</b>	$f_c$	—	914.5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	—	3.0	4.0	dB
	914.00 ... 915.00 MHz				
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0.7	2.0	dB
	914.00 ... 915.00 MHz				
<b>Absolute attenuation</b>	$\alpha$				
	450.00 ... 850.00 MHz	50	54	—	dB
	850.00 ... 872.20 MHz	45	53	—	dB
	872.20 ... 893.60 MHz	28	39	—	dB
	893.60 ... 904.30 MHz	6	18	—	dB
	924.70 ... 925.70 MHz	12	27	—	dB
	925.70 ... 935.40 MHz	20	30	—	dB
	935.40 ... 936.40 MHz	32	38	—	dB
	936.40 ... 956.80 MHz	27	32	—	dB
	956.80 ... 959.00 MHz	32	38	—	dB
	959.00 ... 1000.00 MHz	37	44	—	dB
	1000.00 ... 1350.00 MHz	42	47	—	dB
	1350.00 ... 1850.00 MHz	32	35	—	dB
	1850.00 ... 2000.00 MHz	27	32	—	dB




**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**


**B4006**  
**959.5 MHz**  
**914.5 MHz**

**Data Sheet**

**Frequency response channel 1 :**

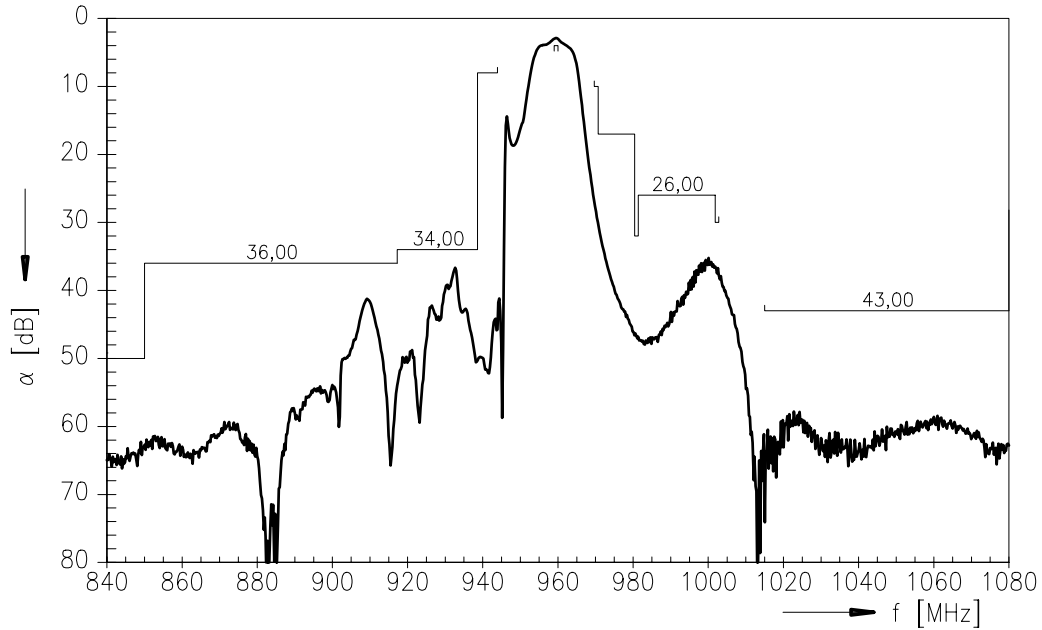

**Frequency response channel 2 :**

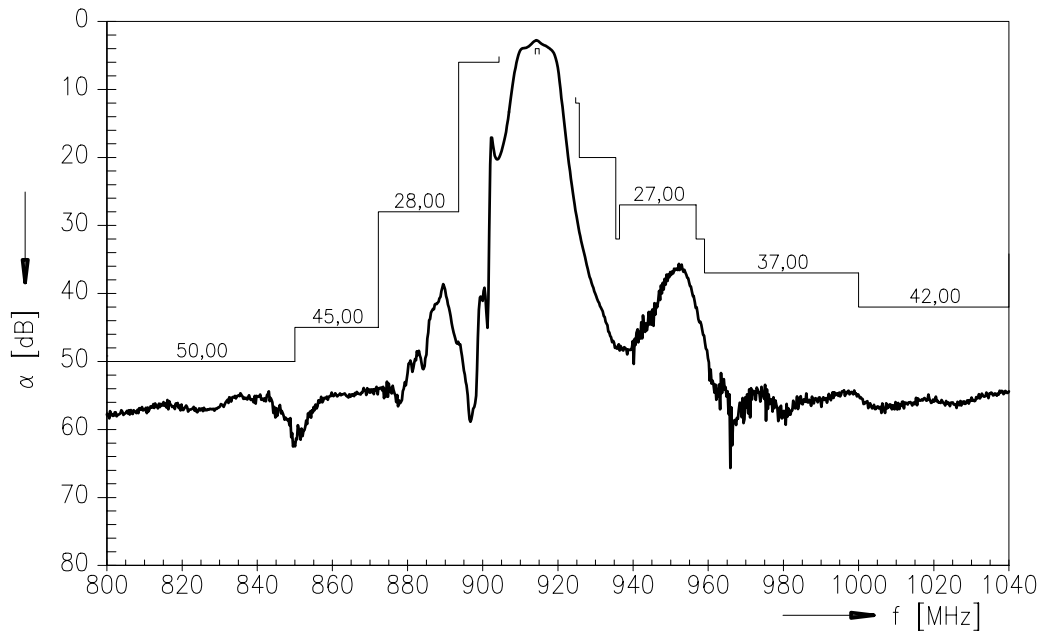




**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**


**B4006**  
**959.5 MHz**  
**914.5 MHz**

**Data Sheet**

**Frequency response channel 1 : (passband)**

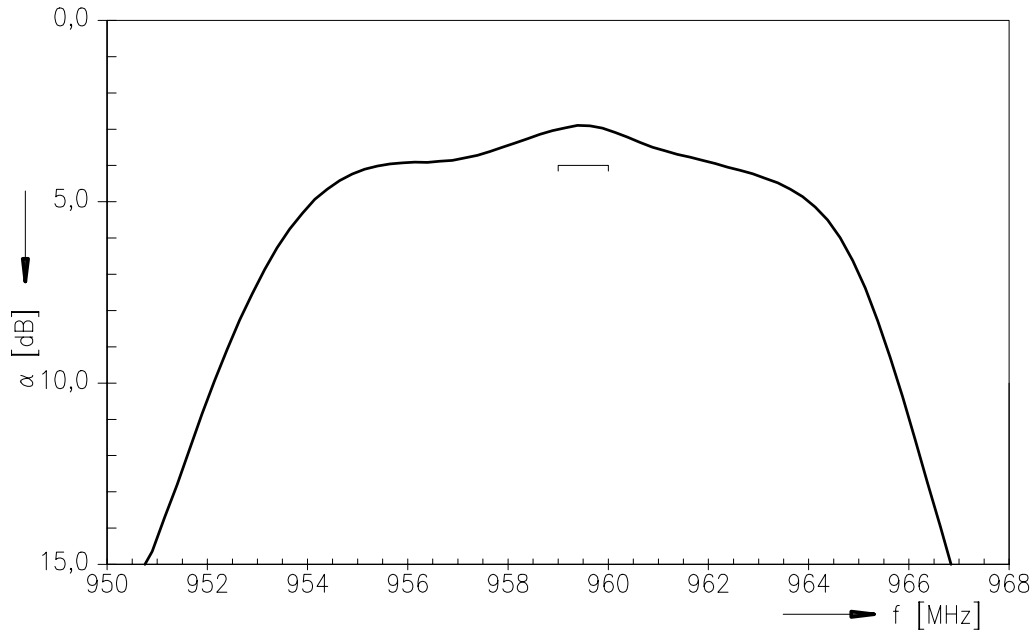

**Frequency response channel 2 : (passband)**

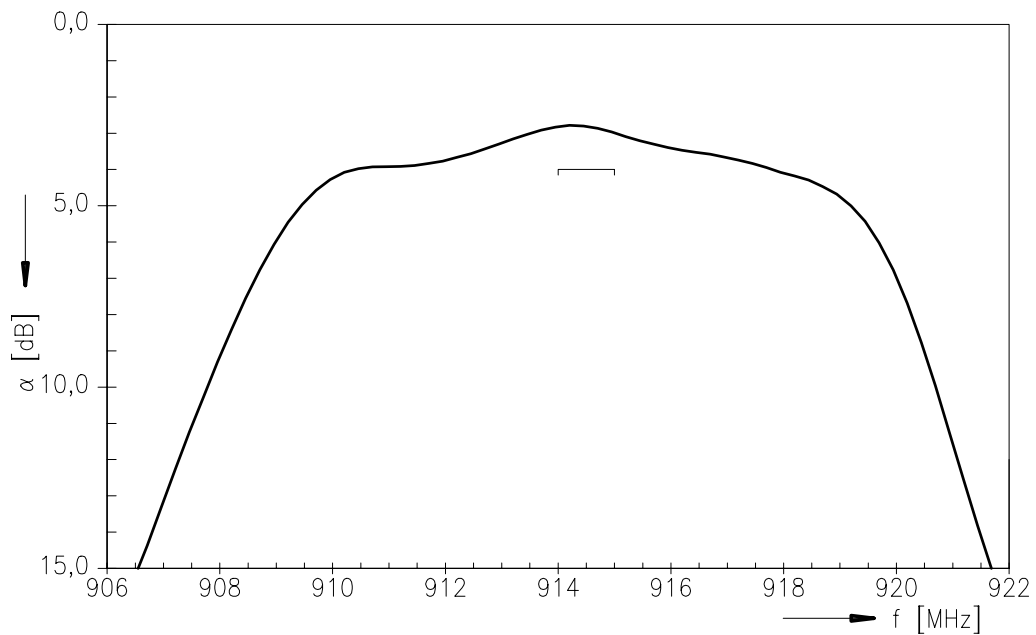




**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**


**B4006**  
**959.5 MHz**  
**914.5 MHz**

**Data Sheet**

**Frequency response channel 1 : (wideband)**

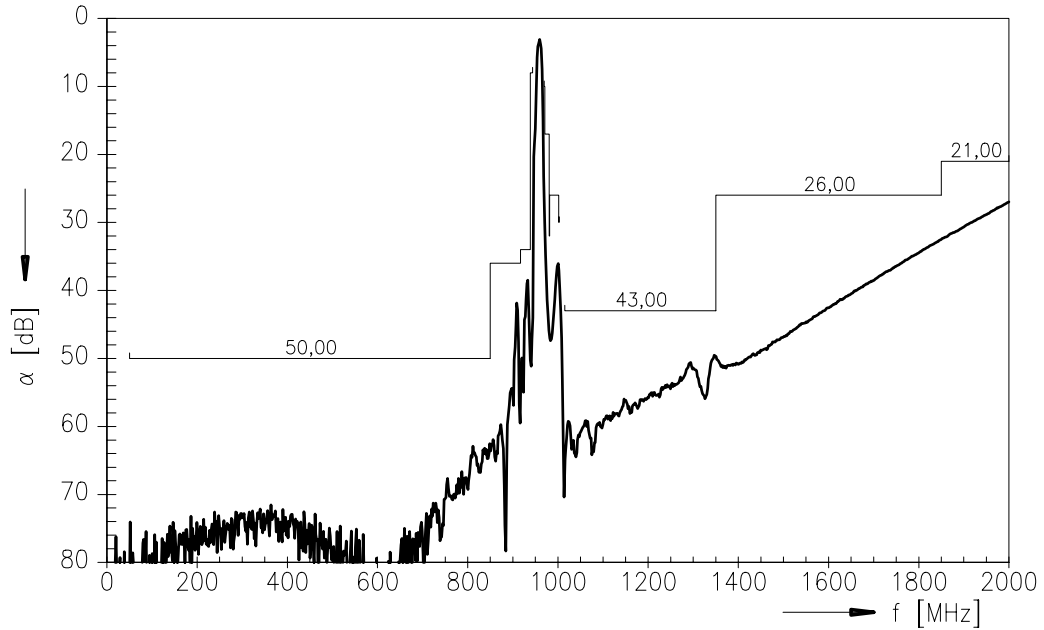

**Frequency response channel 2 : (wideband)**

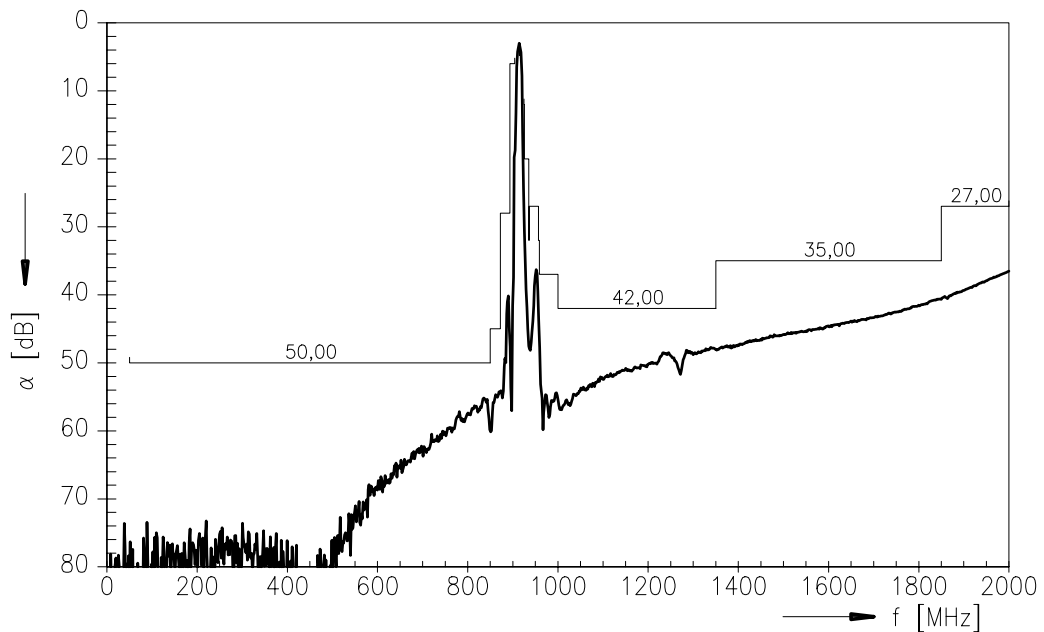



Siemens Matsushita Components

**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**

**B4006**  
**959.5 MHz**  
**914.5 MHz**

**Data Sheet**

**Isolation between channel 1 and channel 2**

Operating temperature range  $T = 0$  to  $+60$  °C  
 Ant term. impedance  $Z_{Ant} = 50 \Omega$   
 Port 1 term. impedance  $Z_{Port 1} = 50 \Omega$   
 Port 2 term. impedance  $Z_{Port 2} = 50 \Omega$

		min.	typ.	max.	
<b>Absolute attenuation</b>	$\alpha$				
	959,00 ... 960,00 MHz	36	41	—	dB
	914,00 ... 915,00 MHz	39	51	—	dB

**Isolation between channel 1 and channel 2 :**

