

FL

For Equipment using S.M.P.S

www.DataSheet4U.com

RFI Power Line Filters

For equipment using s.m.p.s

High attenuation for switching power supplies.

Double stage filter.

Very high asymmetrical attenuation.



General Specifications

Maximum operating voltage: 250Vac.

Operating frequency: DC - 60Hz.

Hipot test voltage:

L/N->PE: 1800Vac 2s.

L->N: 1700 Vdc 2s.


Application class:

HPF Acc. TO DIN 40040

(-25°C/+85°C/95% RH, 30d).

Flammability class: UL 94 V2.

Electrical schematics




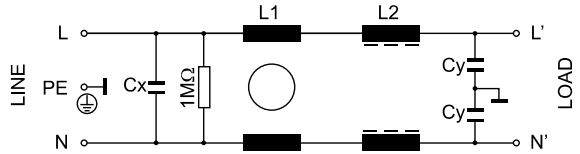


Product List

TYPE	I	L-1	L-2	CX	CY	HOUSING	L.CURRENT	CONNECTION	WEIGHT ±g
FL-1X	1 Amp	22 mH	1,2 mH	0,22 µF	4,7 nF	213	0,45 mA	AWG18 WIRE	129
FL-1Z						212		FASTON 6,3mm	125
FL-3X	3 Amp	16 mH	0,03 mH	0,22 µF	4,7 nF	213	0,45 mA	AWG18 WIRE	129
FL-3Z						212		FASTON 6,3mm	125
FL-3ZH	3 Amp	16 mH	0,25 mH	0,22 µF	4,7 nF	216	0,45 mA	FASTON 6,3mm	131
FL-4X	4 Amp	8 mH	0,06 mH	1 µF	22 nF	217	2,12 mA	AWG18 WIRE	137
FL-4Z						216		FASTON 6,3mm	131
FL-6Z	6 Amp	4 mH	0,1 mH	0,47 µF	22 nF	221	2,12 mA	FASTON 6,3mm	500
FL-10Z	10 Amp	4 mH	0,1 mH	0,47 µF	22 nF	221	2,12 mA	FASTON 6,3mm	500

Insertion Loss

--- ASYM
— SYM



www.DataSheet4U.com