

Surface Mount Aluminum Electrolytic Capacitors NACH Series

FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION
- WIDE TEMPERATURE -40° ~+105°C
- LONG LIFE (+105°C, 2000 HOURS)
- 6.3 mm MAXIMUM HEIGHT
- DESIGNED FOR REFLOW SOLDERING

**RoHS
Compliant**
includes all homogeneous materials
*See Part Number System for Details



CHARACTERISTICS

Rated Voltage Range	4 ~ 50Vdc							
Rate Capacitance Range	0.1 ~ 220μF							
Operating Temp. Range	-40°C ~ +105°C							
Capacitance Tolerance	±20% (M), ±10% (K)*							
Max. Leakage Current After 2 Minutes @ 20°C	0.01CV or 3μA whichever is greater							
Working Voltage/Surge Voltage Max. Tan δ @ 120Hz/20°C	W.V. (Vdc)	4	6.3	10	16	25	35	50
	S.V. (Vdc)	5	8.0	13	20	32	44	63
	Dissipation Factor	0.50	0.30	0.22	0.16	0.14**	0.12	0.12
Low Temperature Stability Impedance Ratio @ 120Hz	Z-40°C/Z+20°C	7	4	3	2	2	2	2
	Z-55/Z+20°C	12	8	6	4	4	3	3
Load Life Test @ 105°C 2,000 Hours	Capacitance Change	Within ±25% of initial measured value						
	Tan δ	Less than 200% of specified value						
	Leakage Current	Less than specified value						

* Optional ± 10% (K) Tolerance available on most values. Contact factory for availability.

** DF is 0.16 for NACH470M25V6.3X8

MAXIMUM PERMISSIBLE RIPPLE CURRENT (mA rms AT 120Hz AND 105°C)

Cap. (μF)	Working Voltage (Vdc)							
	4.0	6.3	10	16	25	35	50	
0.1	-	-	-	-	-	-	-	1.0
0.22	-	-	-	-	-	-	-	2.0
0.33	-	-	-	-	-	-	-	3.0
0.47	-	-	-	-	-	-	-	5.0
1.0	-	-	-	-	-	-	-	10
2.2	-	-	-	-	-	-	-	16
3.3	-	-	-	-	-	-	-	16
4.7	-	-	-	-	22	-	-	23
10	-	-	-	28	-	28	-	35
22	-	26	-	39	-	55	-	-
33	-	29	43	-	65	-	-	-
47	34	46	-	70	-	-	-	-
100	61	71	-	-	-	-	-	-
220	82	-	-	-	-	-	-	-

MAXIMUM ESR (Ω AT 120Hz AND 20°C)

Cap. (μF)	Working Voltage (Vdc)							
	4.0	6.3	10	16	25	35	50	
0.1	-	-	-	-	-	-	-	1993
0.22	-	-	-	-	-	-	-	906
0.33	-	-	-	-	-	-	-	604
0.47	-	-	-	-	-	-	-	424
1.0	-	-	-	-	-	-	-	199
2.2	-	-	-	-	-	-	-	90.6
3.3	-	-	-	-	-	-	-	60.4
4.7	-	-	-	-	49.5	-	-	42.4
10	-	-	-	26.6	-	19.9	-	19.9
22	-	22.6	-	12.1	-	9.05	-	-
33	-	15.1	11.1	-	7.05	-	-	-
47	17.7	10.6	-	5.66	-	-	-	-
100	8.31	4.98	-	-	-	-	-	-
220	3.77	-	-	-	-	-	-	-

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR

Frequency Hz	50 ≤ f < 100	100 ≤ f < 1K	1K ≤ f < 10K	10K ≤ f < 100K
Correction Factor	0.8	1.0	1.3	1.5

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.

Also found at www.niccomp.com/precautions


If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



Surface Mount Aluminum Electrolytic Capacitors NACH Series

STANDARD PRODUCT AND CASE SIZE TABLE DφxL (mm)

Cap (μF)	Code	Working Voltage (Vdc)						
		4.0	6.3	10	16	25	35	50
0.1	R10	-	-	-	-	-	-	4x6.3
0.22	R22	-	-	-	-	-	-	4x6.3
0.33	R33	-	-	-	-	-	-	4x6.3
0.47	R47	-	-	-	-	-	-	4x6.3
1.0	1R0	-	-	-	-	-	-	4x6.3
2.2	2R2	-	-	-	-	-	-	4x6.3
3.3	3R3	-	-	-	-	-	-	4x6.3
4.7	4R7	-	-	-	-	4x6.3	-	5x6.3
10	100	-	-	-	4x6.3	-	5x6.3	6.3x6.3
22	220	-	4x6.3	-	5x6.3	-	6.3x6.3	-
33	330	-	4x6.3	5x6.3	-	6.3x6.3	-	-
47	470	4x6.3	5x6.3	-	6.3x6.3	-	-	-
100	101	5x6.3	6.3x6.3	-	-	-	-	-
220	221	6.3x6.3	-	-	-	-	-	-

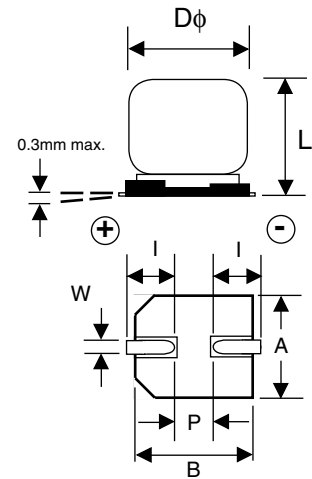

DIMENSIONS (mm)

Case Size	Dφ ±0.5	L max.	A ±0.2	B ±0.2	I ±0.2	W	P ±0.2
4 x 6.3	4.0	6.3	4.3	4.3	1.8	0.5 ~ 0.8	1.0
5 x 6.3	5.0	6.3	5.3	5.3	2.2	0.5 ~ 0.8	1.5
6.3 x 6.3	6.3	6.3	6.6	6.6	2.5	0.5 ~ 0.8	2.2

PART NUMBER SYSTEM

