



Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# MBR4020WT THRU MBR4060WT

## 40 Amp Schottky Barrier Rectifier 20 to 60 Volts

### Features

- High Surge Capacity
- Low Power Loss, High Efficiency
- High Current Capability, Low  $V_F$
- Metal of silicon Rectifier, majority Carrier Conduction
- Guard Ring For Transient Protection
- Plastic Package Has UL Flammability Classification 94V-0

### Maximum Ratings

- Operating Temperature:  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$
- Storage Temperature:  $-55^{\circ}\text{C}$  to  $+175^{\circ}\text{C}$



MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR4020WT	20V	14V	20V
MBR4030WT	30V	21V	30V
MBR4035WT	35V	24.5V	35V
MBR4040WT	40V	28V	40V
MBR4045WT	45V	31.5V	45V
MBR4060WT	60V	42V	60V

### Electrical Characteristics @ $25^{\circ}\text{C}$ Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	40.0A	$T_C=125^{\circ}\text{C}$
Peak Forward Surge Current	$I_{FSM}$	400A	8.3ms half sine
Maximum Instantaneous Forward Voltage MBR4020WT-4045WT MBR4060WT MBR4020WT-4045WT MBR4060WT	$V_F$	.70V .80V .80V .90V	$I_{FM}=20.0A$ $T_C=25^{\circ}\text{C}$ $I_{FM}=40.0A$ $T_C=25^{\circ}\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	1.0mA 100mA	$T_C=25^{\circ}\text{C}$ $T_C=125^{\circ}\text{C}$
Typical Junction Capacitance	$C_j$	700pF	Measured at 1.0MHz, $V_R=4.0V$

Pulse test: Pulse width 300 usec, duty cycle 2%.

### TO-247

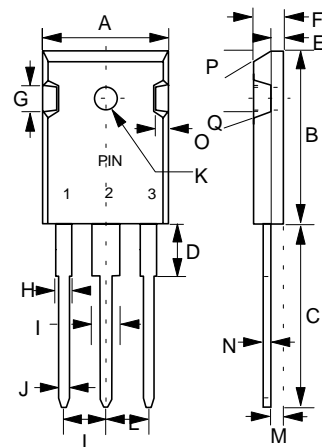

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.620	.640	15.75	16.25	
B	.837	.856	21.25	21.75	
C	.772	.791	19.60	20.10	
D	.149	.172	3.78	4.38	
E	.074	.082	1.88	2.08	
F	.192	.202	4.87	5.13	
G	.173 TYP		4.4 TYP		
H	.075	.085	1.90	2.16	
I	.115	.127	2.93	3.22	
J	.044	.048	1.12	1.22	
K	.114	.126	2.90	3.20	∅
L	.205	.224	5.20	5.70	
M	.083	.095	2.10	2.40	
N	.020	.030	0.51	0.76	
O	.076	.086	1.93	2.18	
P	20° TYP				
Q	10° TYP				

# MBR4020WT thru MBR4060WT

