

General-purpose CMOS Logic IC Series (BU4S,BU4000B Series)

High Voltage CMOS Logic ICs <Analog Switch>



BU4066BC,BU4066BCF,BU4066BCFV,BU4051BC,
BU4051BCF,BU4051BCFV,BU4052BC,BU4052BCF,BU4052BCFV,
BU4053BC,BU4053BCF,BU4053BCFV,BU4551B,BU4551BF,BU4551BFV

No.11050EBT05

●Description

BU4066BC series ICs each contain 4 independent switches capable of controlling either digital or analog signals. BU4051BC / BU4052BC / BU4053BC / and BU4551B series ICs are analog selectable composite multiplexer/demultiplexer. BU4051BC series is configured with 8 channels, BU4052BC is configured with two 4 channels,BU4053BC series is configured with three 2 channels, BU4551B series is configured with four 2 channels, and switches applicable for each channel are turned on according to digital signals of control terminal. Even if the logic amplitude (VDD-VSS) of the control signal is small, signals of large amplitude (VDD-VEE) can be switched.


●Features

- 1) Low power consumption
- 2) Wide operating supply voltage (3[V]~18[V])
- 3) High input impedance
- 4) L-TTL2 input and LS-TTL1 can be driven directly.
- 5) Applicable channel switches can be turned "ON" and "OFF" by the digital control signal.
- 6) Small control voltage (VDD-VSS) can control signals of large amplitude (VDD-VEE).
- 7) Linearity with excellent transfer characteristics

●Use

This product is used as the switch and chopper modulation circuit of analog and digital signals. Since ON resistance of each switch is low, the product can be connected to low impedance circuit. The product can be used as ON/OFF switch and changeover switch of high-speed lines without degrading analog signals such as voice and images.

●Lineup

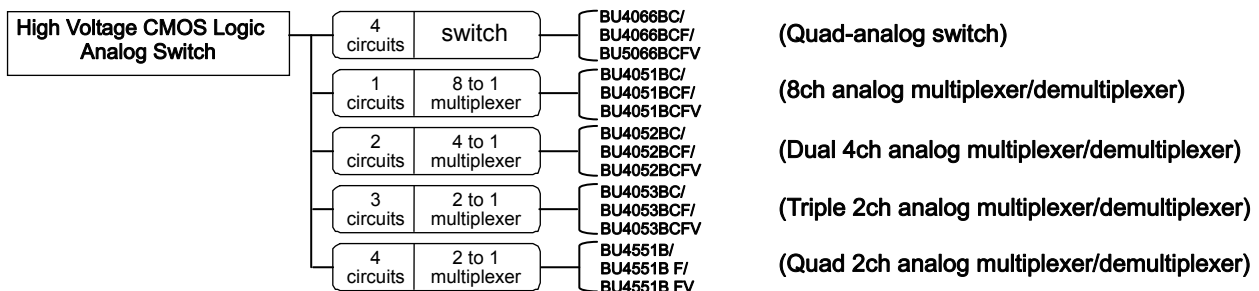



● Absolute Maximum Ratings

| Parameter | Symbol | Limit | | | | | Unit |
|------------------------------|--------|-----------------|----------|----------|----------|-----------------|------|
| | | BU4066BC | BU4051BC | BU4052BC | BU4053BC | BU4551B | |
| Power Supply Voltage | VDD | -0.5 to 20 | | | | -0.3 to 18 | V |
| Supply current | Iin | ±10 | | | | | mA |
| Operating temperature | Topr | -40 to 85 | | | | | °C |
| Storage temperature | Tstg | -55 to 150 | | | | | °C |
| Input Voltage | VIN | -0.5 to VDD+0.5 | | | | -0.3 to VDD+0.3 | V |
| Maximum junction temperature | Tjmax | 150 | | | | | °C |

● Recommended Operating Conditions

| Parameter | Symbol | Limit | | | | | Unit |
|------------------------|--------|----------|----------|----------|----------|---------|------|
| | | BU4066BC | BU4051BC | BU4052BC | BU4053BC | BU4551B | |
| Operating Power Supply | VDD | 3 to 18 | | | | 3 to 16 | V |
| Input Voltage | VIN | 0 to VDD | | | | | V |


● Thermal Derating Curve

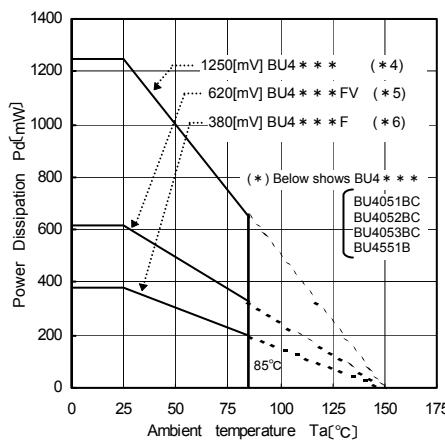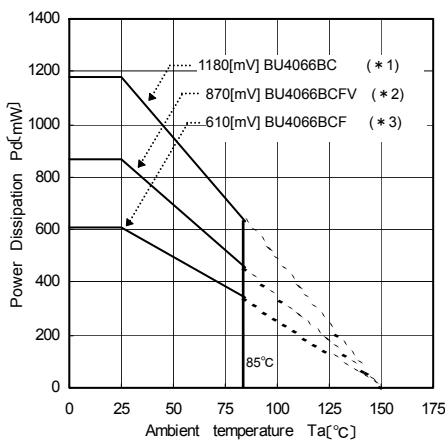


| | | |
|------|------|-------|
| (*1) | 9.5 | mW/°C |
| (*2) | 7.0 | |
| (*3) | 4.9 | |
| (*4) | 10.0 | |
| (*5) | 5.0 | |
| (*6) | 3.1 | |

When used at Ta=25[°C] or above, values of above are reduced per 1[°C]. Allowable loss is the value for mounting 70[mm] x 70[mm] x 1.6[mm] FR4 glass epoxy circuit board copper foil area is 3% or less).


● I/O Interface

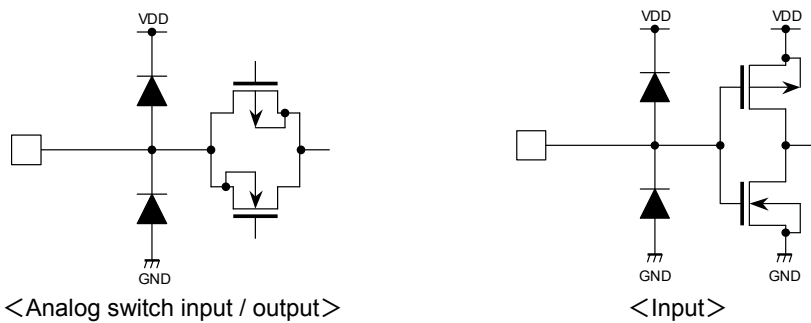


● Description of output rising / falling wave

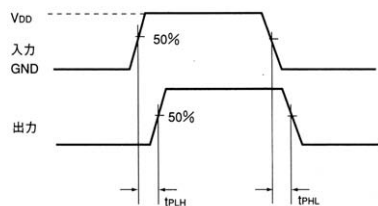

- tPLH: Time up to 50% of the rise time of input waveform ~ 50% of the rise time of output waveform
- tPHL: Time up to 50% of the fall time of input waveform ~ 50% of the fall time of output waveform



- tPZH: Time up to 50% of input ~ 50% of the rise time of output waveform
- tPHZ: Time up to 50% of input ~ 50% of the fall time of output waveform



- tPZH: Time up to 50% of input ~ 50% of the fall time of output waveform
- tPHZ: Time up to 10% of input ~ 10% of the rise time of output waveform

● Electrical Characteristics (BU4066BC)

DC Characteristics (Unless otherwise noted, VSS=0[V], Ta=25[°C])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|-----------------------------------|-----------------|----------------|-----|------|------|--------|--------------------------|--------|
| | | MIN | TYP | MAX | | | | |
| Input "H" voltage | VIH | 3.5 | - | - | V | 5 | - | - |
| | | 7.0 | - | - | | 10 | | |
| | | 11.0 | - | - | | 15 | | |
| Input "L" voltage | VIL | - | - | 1.5 | V | 5 | - | - |
| | | - | - | 3.0 | | 10 | | |
| | | - | - | 3.75 | | 15 | | |
| Input "H" current | I _{IH} | - | - | 0.3 | μA | 15 | VIH=15[V] | - |
| Input "L" current | I _{IL} | - | - | -0.3 | μA | 15 | VIL=0[V] | - |
| ON resistance | RON | - | 150 | 600 | Ω | 5 | VIN=0.25[V] RL=10[kΩ] | 1 |
| | | - | 500 | 950 | | 5 | VIN=2.5[V] RL=10[kΩ] | |
| | | - | 200 | 600 | | 5 | VIN=5[V] RL=10[kΩ] | |
| | | - | 120 | 500 | | 10 | VIN=5[V] RL=10[kΩ] | |
| | | - | 80 | 280 | | 15 | VIN=7.5[V] RL=10[kΩ] | |
| ON resistance defluxion | ΔRON | - | 25 | - | Ω | 5 | VI=VDD/2 RL=10[kΩ] | - |
| | | - | 10 | - | | 10 | | |
| | | - | 5 | - | | 15 | | |
| Channel-OFF Leakage current | IOFF | - | - | 0.3 | μA | 15 | VIN=15[V] VOUT=0[V] | - |
| | | - | - | -0.3 | | 15 | VIN=0[V] VOUT=15[V] | |
| Static supply current | IDD | - | - | 1.0 | μA | 5 | VI=VDD or GND | - |
| | | - | - | 2.0 | | 10 | | |
| | | - | - | 4.0 | | 15 | | |
| Input capacitance (control input) | CC | - | 8 | - | pF | - | f=1[MHz] | - |
| Input capacitance (switch input) | CS | - | 10 | - | pF | - | f=1[MHz] | - |

Switching Characteristics (Unless otherwise noted, VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|---------------------------------|--|----------------|-----|-----|-------|--------|--|----------------|
| | | MIN | TYP | MAX | | | | |
| Propagation delay time SWIN→OUT | t _{PLH} t _{PHL} | - | 20 | 50 | ns | 5 | RL=10[kΩ] | 2 · 3 |
| | | - | 12 | 40 | | 10 | | |
| | | - | 10 | 30 | | 15 | | |
| Propagation delay time CONT→OUT | t _{PHZ} , t _{PLZ} t _{PZH} , t _{PZL} | - | 40 | 90 | ns | 5 | Output "H" "L" → "Hi Z" RL=1[kΩ] | 4 · 5 6 · 7 |
| | | - | 35 | 80 | | 10 | | |
| | | - | 30 | 70 | | 15 | | |
| Propagation delay time CONT→OUT | t _{PHZ} , t _{PLZ} t _{PZH} , t _{PZL} | - | 60 | 140 | ns | 5 | Output "Hi Z" → "H" "L" RL=1[kΩ] | 4 · 5 6 · 7 |
| | | - | 20 | 50 | | 10 | | |
| | | - | 15 | 40 | | 15 | | |
| Feed through attenuation | FT | - | 0.7 | - | MHz | 5 | VSS=-5[V] RL=10[kΩ] | - |
| Sine wave distortion | D | - | 0.1 | - | % | 5 | VSS=-5[V] RL=10[kΩ] | - |
| Cross talk (CONT→OUT) | CT _c | - | - | 600 | mVp-p | 5 | VSS=-5[V] RL=10[kΩ], f=1[MHz] | - |
| Cross talk(2) Between channels | CT | - | 1 | - | MHz | 5 | VSS=-5[V] RL=10[kΩ] | - |

● Electrical Characteristics (BU4051BC)

DC Characteristics (Unless otherwise noted, VSS=0[V], Ta=25[°C])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|-----------------------------|-----------------|----------------|-----|------|------|--------|---------------|--------|
| | | MIN | TYP | MAX | | | | |
| Input "H" voltage | VIH | 3.5 | - | - | V | 5 | - | - |
| | | 7.0 | - | - | | 10 | | |
| | | 11.0 | - | - | | 15 | | |
| Input "L" voltage | VIL | - | - | 1.5 | V | 5 | - | - |
| | | - | - | 3.0 | | 10 | | |
| | | - | - | 4.0 | | 15 | | |
| Input "H" current | I _{IH} | - | - | 0.3 | μA | 15 | VIH=15[V] | - |
| Input "L" current | I _{IL} | - | - | -0.3 | μA | 15 | VIL=0[V] | - |
| ON resistance | RON | - | - | 950 | Ω | 5 | - | 8 |
| | | - | - | 250 | | 10 | | |
| | | - | - | 160 | | 15 | | |
| ON resistance defluxion | ΔRON | - | 10 | - | Ω | 5 | - | - |
| | | - | 6 | - | | 10 | | |
| | | - | 4 | - | | 15 | | |
| Channel-OFF Leakage current | IOFF | - | - | 0.3 | μA | 15 | - | - |
| | | - | - | -0.3 | | 15 | | |
| Static supply current | IDD | - | - | 5 | μA | 5 | VI=VDD or GND | - |
| | | - | - | 10 | | 10 | | |
| | | - | - | 15 | | 15 | | |

Switching Characteristics (Unless otherwise noted, VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|---------------------------------------|--|----------------|------|-----|------|--------|-----------|--|
| | | MIN | TYP | MAX | | | | |
| Propagation delay time CHANNEL IN→OUT | t _{PLH} t _{PHL} | - | 15 | 45 | ns | 5 | - | 9 · 10 |
| | | - | 8 | 20 | | 10 | | |
| | | - | 6 | 15 | | 15 | | |
| Propagation delay time CONT→OUT | t _{PHZ} , t _{PLZ} t _{PZH} , t _{PZL} | - | 170 | 550 | ns | 5 | - | 11 · 12 13 · 14 15 · 16 17 · 18 |
| | | - | 90 | 240 | | 10 | | |
| | | - | 70 | 160 | | 15 | | |
| Propagation delay time INHIBIT→OUT | t _{PHZ} , t _{PLZ} t _{PZH} , t _{PZL} | - | 150 | 450 | ns | 5 | - | 11 · 12 13 · 14 15 · 16 17 · 18 |
| | | - | 70 | 210 | | 10 | | |
| | | - | 50 | 160 | | 15 | | |
| Maximum propagation frequency | f _{MAX.} | - | 20 | - | MHz | 5 | VEE=-5[V] | - |
| Feed through attenuation | FT | - | 0.5 | - | MHz | 5 | VEE=-5[V] | - |
| Sine wave distortion | D | - | 0.02 | - | % | 5 | VEE=-5[V] | - |
| Input capacitance (control input) | CC | - | 5 | - | pF | - | - | - |
| Input capacitance (switch input) | CS | - | 10 | - | pF | - | - | - |

●Electrical Characteristics(BU4052BC)

DC Characteristics(Unless otherwise noted, VSS=0[V], Ta=25[°C])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|-----------------------------|-----------------|----------------|-----|------|------|--------|---------------|--------|
| | | MIN | TYP | MAX | | | | |
| Input "H" voltage | VIH | 3.5 | - | - | V | 5 | - | - |
| | | 7.0 | - | - | | 10 | | |
| | | 11.0 | - | - | | 15 | | |
| Input "L" voltage | VIL | - | - | 1.5 | V | 5 | - | - |
| | | - | - | 3.0 | | 10 | | |
| | | - | - | 4.0 | | 15 | | |
| Input "H" current | I _{IH} | - | - | 0.3 | μA | 15 | VIH=15[V] | - |
| Input "L" current | I _{IL} | - | - | -0.3 | μA | 15 | VIL=0[V] | - |
| ON resistance | RON | - | - | 950 | Ω | 5 | - | 19 |
| | | - | - | 250 | | 10 | | |
| | | - | - | 160 | | 15 | | |
| ON resistance defluxion | ΔRON | - | 10 | - | Ω | 5 | - | - |
| | | - | 6 | - | | 10 | | |
| | | - | 4 | - | | 15 | | |
| Channel-OFF Leakage current | IOFF | - | - | 0.3 | μA | 15 | - | - |
| | | - | - | -0.3 | | 15 | | |
| Static supply current | IDD | - | - | 5 | μA | 5 | VI=VDD or GND | - |
| | | - | - | 10 | | 10 | | |
| | | - | - | 15 | | 15 | | |

Switching Characteristics(Unless otherwise noted, Ta=25°C, CL=50pF)

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|--------------------------------------|------------------------|----------------|------|-----|------|--------|-----------|--------------------|
| | | MIN | TYP | MAX | | | | |
| Propagation delay time SWITCH IN→OUT | tPLH tPHL | - | 15 | 45 | ns | 5 | - | 20 · 21 |
| | | - | 8 | 20 | | 10 | | |
| | | - | 6 | 15 | | 15 | | |
| Propagation delay time CONT→OUT | tPHZ,tPLZ tPZH,tPZL | - | 170 | 550 | ns | 5 | - | 22 · 23 24 · 25 |
| | | - | 90 | 240 | | 10 | | |
| | | - | 70 | 160 | | 15 | | |
| Propagation delay time INH→OUT | tPHZ,tPLZ tPZH,tPZL | - | 150 | 450 | ns | 5 | - | 26 · 27 28 · 29 |
| | | - | 70 | 210 | | 10 | | |
| | | - | 50 | 160 | | 15 | | |
| Maximum propagation frequency | fMAX. | - | 20 | - | MHz | 5 | VEE=-5[V] | - |
| Feed through attenuation | FT | - | 0.5 | - | MHz | 5 | VEE=-5[V] | - |
| Sine wave distortion | D | - | 0.02 | - | % | 5 | VEE=-5[V] | - |
| Input capacitance (control input) | CC | - | 5 | - | pF | - | - | - |
| Input capacitance (switch input) | CS | - | 10 | - | pF | - | - | - |

● Electrical Characteristics (BU4053BC)

DC Characteristics (Unless otherwise noted, VSS=0[V], Ta=25[°C])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|-----------------------------|-----------------|----------------|-----|------|------|--------|---------------|--------|
| | | MIN | TYP | MAX | | | | |
| Input "H" voltage | VIH | 3.5 | - | - | V | 5 | - | - |
| | | 7.0 | - | - | | 10 | | |
| | | 11.0 | - | - | | 15 | | |
| Input "L" voltage | VIL | - | - | 1.5 | V | 5 | - | - |
| | | - | - | 3.0 | | 10 | | |
| | | - | - | 4.0 | | 15 | | |
| Input "H" current | I _{IH} | - | - | 0.3 | μA | 15 | VIH=15[V] | - |
| Input "L" current | I _{IL} | - | - | -0.3 | μA | 15 | VIL=0[V] | - |
| RON resistance | RON | - | - | 950 | Ω | 5 | - | 30 |
| | | - | - | 250 | | 10 | | |
| | | - | - | 160 | | 15 | | |
| RON resistance defluxion | ΔRON | - | 10 | - | Ω | 5 | - | - |
| | | - | 6 | - | | 10 | | |
| | | - | 4 | - | | 15 | | |
| Channel-OFF Leakage current | IOFF | - | - | 0.3 | μA | 15 | - | - |
| | | - | - | -0.3 | | 15 | | |
| Static supply current | IDD | - | - | 5 | μA | 5 | VI=VDD or GND | - |
| | | - | - | 10 | | 10 | | |
| | | - | - | 15 | | 15 | | |

Switching Characteristics (Unless otherwise noted, VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|-----------------------------------|--|----------------|------|-----|------|--------|-----------|--------------------|
| | | MIN | TYP | MAX | | | | |
| Propagation delay time SW IN→OUT | t _{PLH} t _{PHL} | - | 15 | 45 | ns | 5 | - | 31 · 32 |
| | | - | 8 | 20 | | 10 | | |
| | | - | 6 | 15 | | 15 | | |
| Propagation delay time CONT→OUT | t _{PHZ} , t _{PLZ} t _{PZH} , t _{PZL} | - | 170 | 550 | ns | 5 | - | 33 · 34 35 · 36 |
| | | - | 90 | 240 | | 10 | | |
| | | - | 70 | 160 | | 15 | | |
| Propagation delay time INH→OUT | t _{PHZ} , t _{PLZ} t _{PZH} , t _{PZL} | - | 150 | 380 | ns | 5 | - | 37 · 38 39 · 40 |
| | | - | 70 | 200 | | 10 | | |
| | | - | 50 | 160 | | 15 | | |
| Maximum propagation frequency | f _{MAX.} | - | 20 | - | MHz | 5 | VEE=-5[V] | - |
| Feed through attenuation | FT | - | 0.7 | - | MHz | 5 | VEE=-5[V] | - |
| Sine wave distortion | D | - | 0.02 | - | % | 5 | VEE=-5[V] | - |
| Input capacitance (control input) | CC | - | 5 | - | pF | - | - | - |
| Input capacitance (switch input) | CS | - | 10 | - | pF | - | - | - |

●Electrical Characteristics(BU4551BC)

DC Characteristics(Unless otherwise noted, VSS=0[V], Ta=25[°C])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|-----------------------------|-----------------|----------------|-----|------|------|--------|---------------|--------|
| | | MIN | TYP | MAX | | | | |
| Input "H" voltage | VIH | 3.5 | - | - | V | 5 | - | - |
| | | 7.0 | - | - | | 10 | | |
| | | 11.0 | - | - | | 15 | | |
| Input "L" voltage | VIL | - | - | 1.5 | V | 5 | - | - |
| | | - | - | 3.0 | | 10 | | |
| | | - | - | 4.0 | | 15 | | |
| Input "H" current | I _{IH} | - | - | 0.3 | μA | 15 | VIH=15[V] | - |
| Input "L" current | I _{IL} | - | - | -0.3 | μA | 15 | VIL=0[V] | - |
| ON resistance | RON | - | - | 1100 | Ω | 5 | - | 41 |
| | | - | - | 500 | | 10 | | |
| | | - | - | 280 | | 15 | | |
| ON resistance defluxion | ΔRON | - | 25 | - | Ω | 5 | - | - |
| | | - | 10 | - | | 10 | | |
| | | - | 5 | - | | 15 | | |
| Channel-OFF Leakage current | IOFF | - | - | 0.3 | μA | 15 | - | - |
| | | - | - | -0.3 | | 15 | | |
| Static supply current | IDD | - | - | 5 | μA | 5 | VI=VDD or GND | - |
| | | - | - | 10 | | 10 | | |
| | | - | - | 15 | | 15 | | |

Switching Characteristics(Unless otherwise noted, VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter | Symbol | Standard Value | | | Unit | VDD[V] | Condition | Fig.No |
|-----------------------------------|--------------------------------------|----------------|------|-----|------|--------|-----------|---------|
| | | MIN | TYP | MAX | | | | |
| Propagation delay time SW IN→OUT | t _{PLH} t _{PHL} | - | 35 | - | ns | 5 | - | 42 · 43 |
| | | - | 15 | - | | 10 | | |
| | | - | 12 | - | | 15 | | |
| Propagation delay time CONT→OUT | t _{PZH} t _{PHZ} | - | 360 | - | ns | 5 | - | 44 · 45 |
| | | - | 160 | - | | 10 | | |
| | | - | 120 | - | | 15 | | |
| Propagation delay time INH→OUT | t _{PZL} t _{PLZ} | - | 360 | - | ns | 5 | - | 46 · 47 |
| | | - | 160 | - | | 10 | | |
| | | - | 120 | - | | 15 | | |
| Maximum propagation frequency | f _{MAX.} | - | 15 | - | MHz | - | VEE=-5[V] | - |
| Feed through attenuation | FT | - | 0.7 | - | MHz | - | VEE=-5[V] | - |
| Sine wave distortion | D | - | 0.02 | - | % | - | VEE=-5[V] | - |
| Input capacitance (control input) | CC | - | 5 | - | pF | - | - | - |
| Input capacitance (switch input) | CS | - | 10 | - | pF | - | - | - |

●Reference Data(BU4066BC)

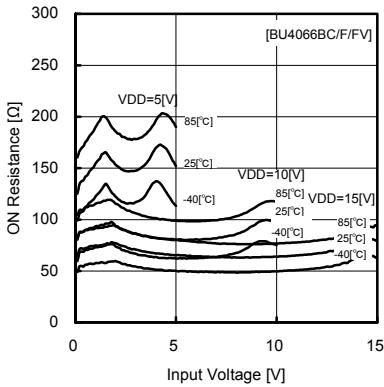


Fig.1 On resistance – input voltage

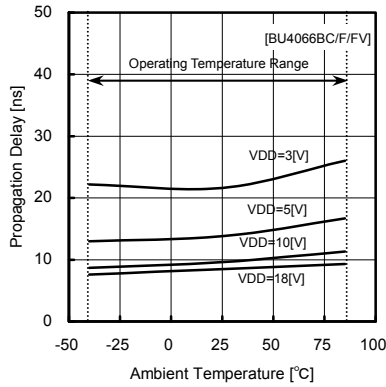


Fig.2 rising propagation delay (IN – OUT)

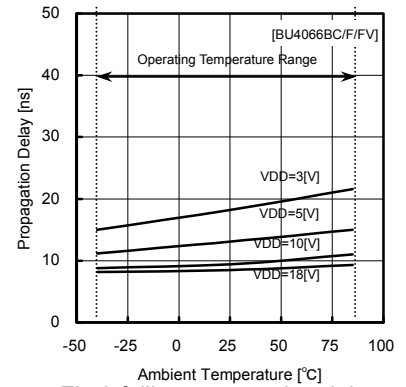


Fig.3 falling propagation delay (IN – OUT)

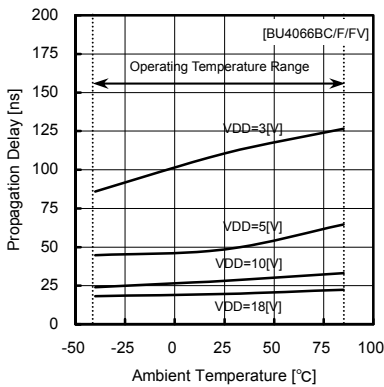


Fig.4 rising propagation delay (CONT – OUT, tPZH)

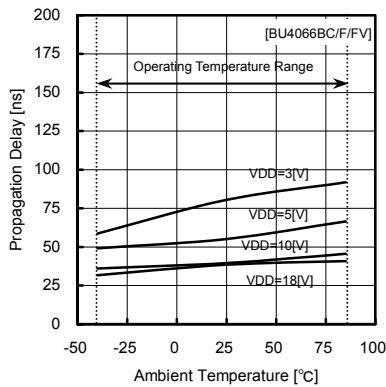


Fig.5 falling propagation delay (CONT – OUT, tPHZ)

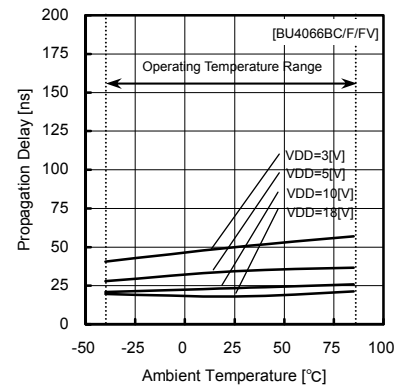


Fig.6 rising propagation delay (CONT – OUT, tPLZ)

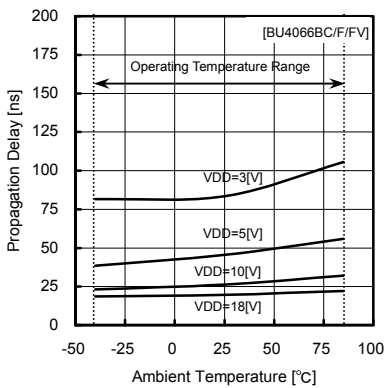


Fig.7 falling propagation delay (CONT – OUT, tPZL)

●Reference Data(BU4051BC)

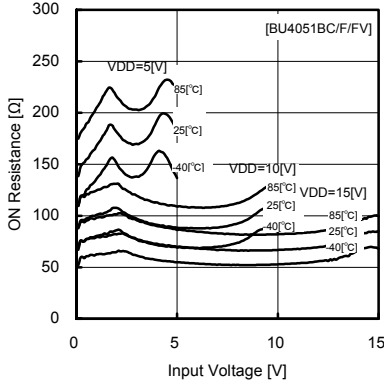


Fig.8 ON resistance – input voltage

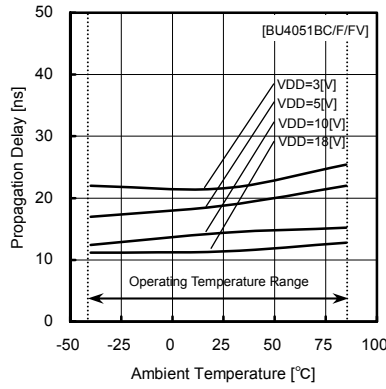


Fig.9 propagation delay time tPLH (IN – OUT)

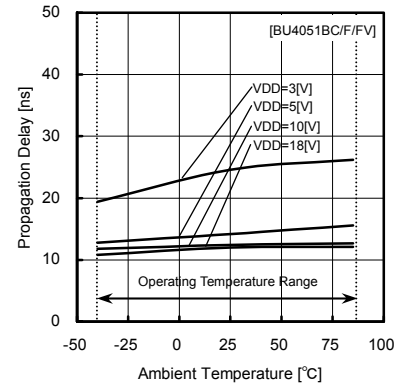


Fig.10 propagation delay time tPHL (IN – OUT)

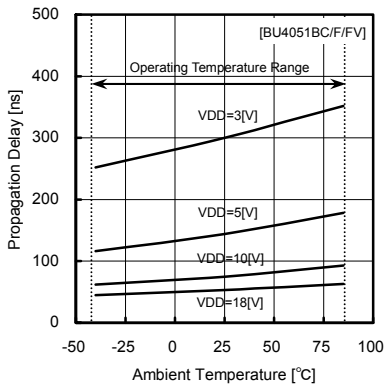


Fig.11 propagation delay time tPZH (CONT – OUT)

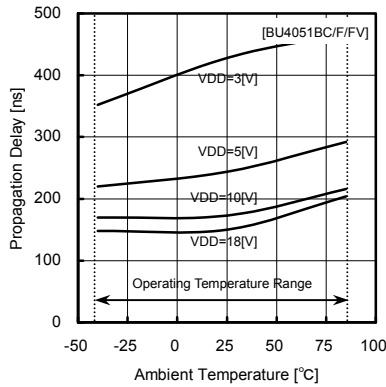


Fig.12 propagation delay time tPHZ (CONT – OUT)

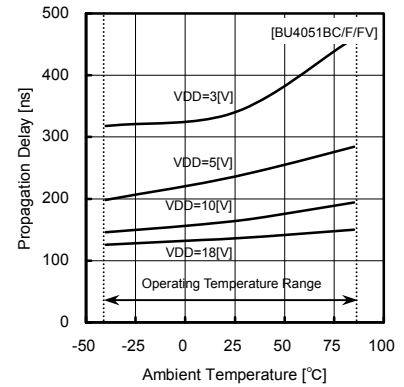


Fig.13 propagation delay time tPLZ (CONT – OUT)

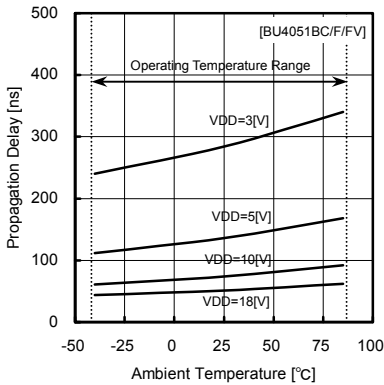


Fig.14 propagation delay time tPZL (CONT – OUT)

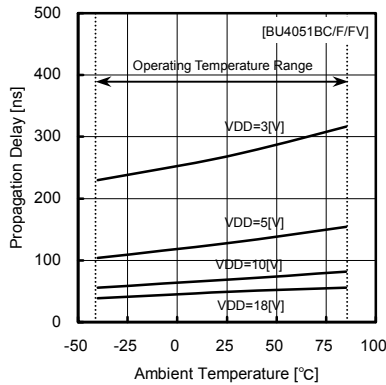


Fig.15 propagation delay time tPZH (INH – OUT)

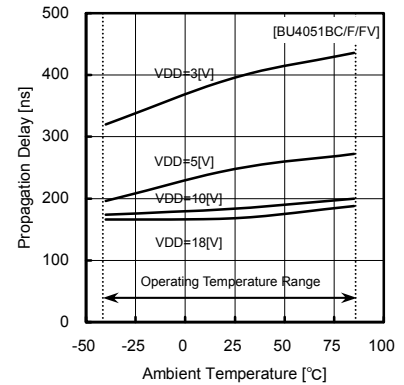


Fig.16 propagation delay time tPHZ (INH – OUT)

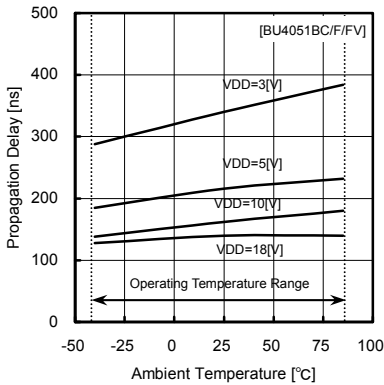


Fig.17 propagation delay time tPZL (INH – OUT)

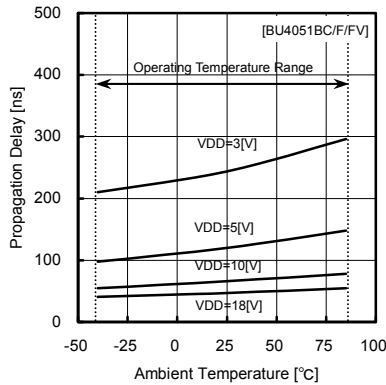


Fig.18 propagation delay time tPLZ (INH – OUT)

●Reference Data(BU4052BC)

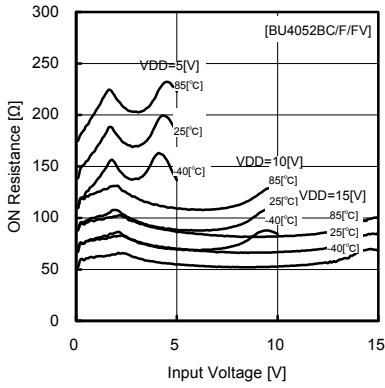


Fig.19 ON resistance – input voltage

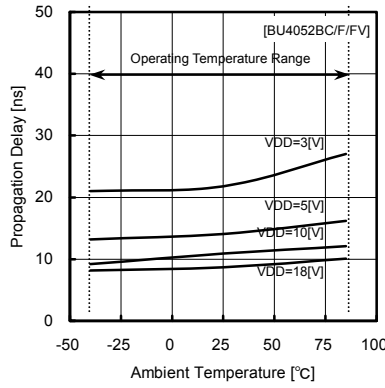


Fig.20 propagation delay time tPLH (IN – OUT)

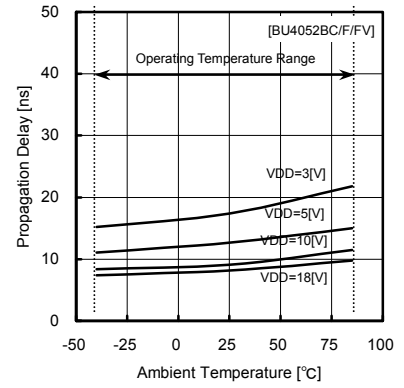


Fig.21 propagation delay time tPHL (IN – OUT)

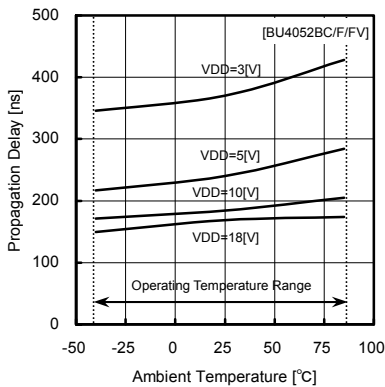


Fig.22 propagation delay time tPZH (CONT – OUT)

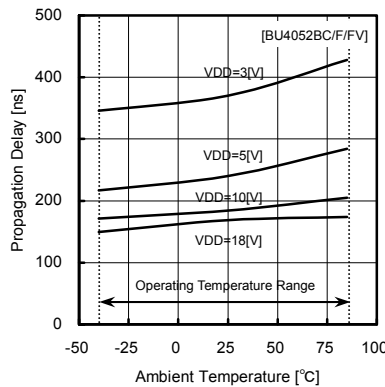


Fig.23 propagation delay time tPHZ (CONT – OUT)

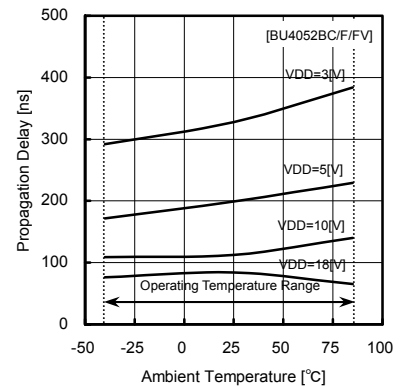


Fig.24 propagation delay time tPLZ (CONT – OUT)

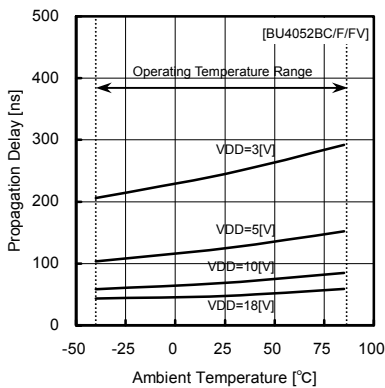


Fig.25 propagation delay time tPZL (CONT – OUT)

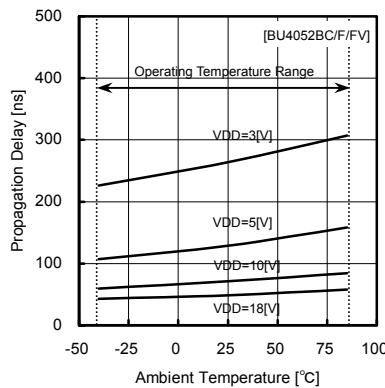


Fig.26 propagation delay time tPZH (INH – OUT)

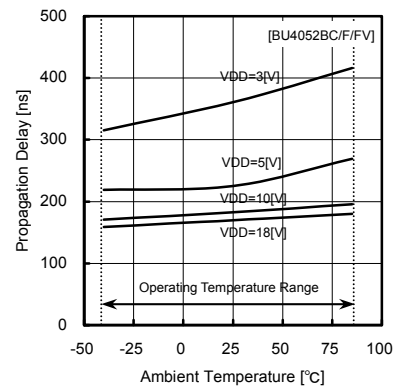


Fig.27 propagation delay time tPHZ (INH – OUT)

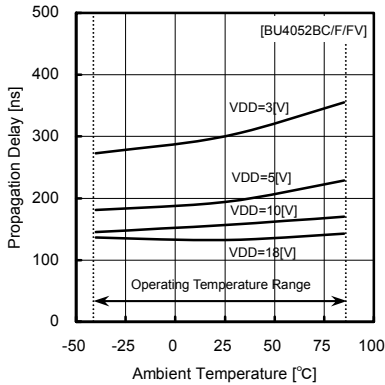


Fig.28 propagation delay time tPZL (INH – OUT)

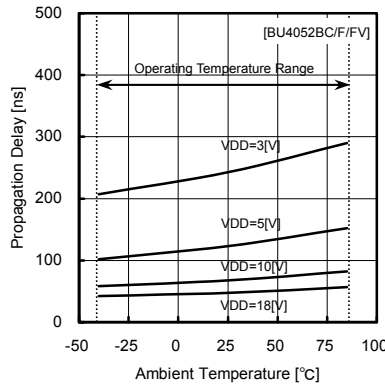


Fig.29 propagation delay time tPLZ (INH – OUT)

●Reference Data(BU4053BC)

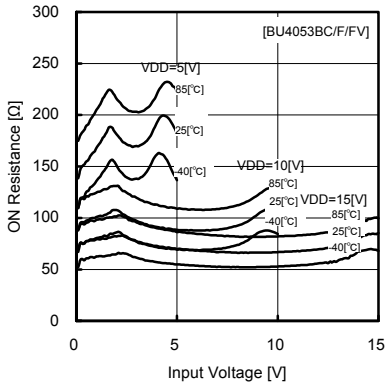


Fig.30 ON resistance – input voltage

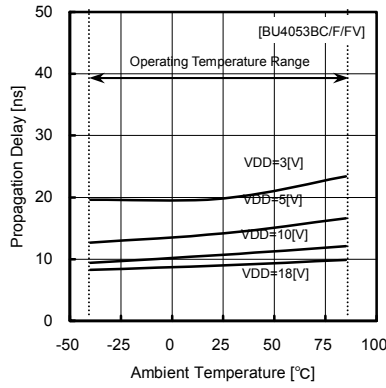


Fig.31 propagation delay time tPLH (IN – OUT)

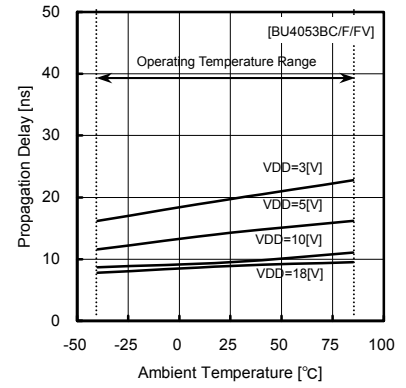


Fig.32 propagation delay time tPHL (IN – OUT)

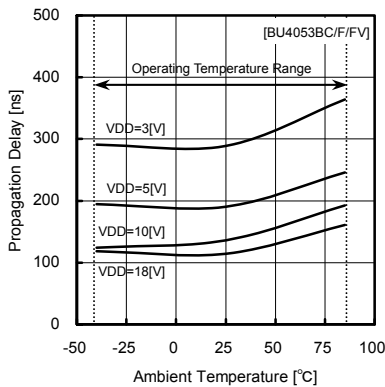


Fig.33 propagation delay time tPZH (CONT – OUT)

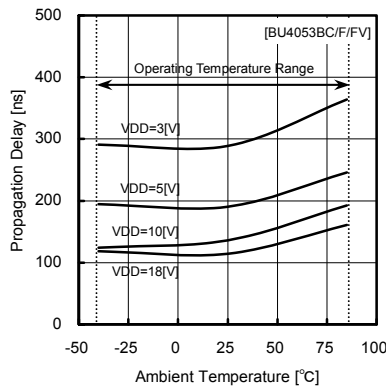


Fig.34 propagation delay time tPHZ (CONT – OUT)

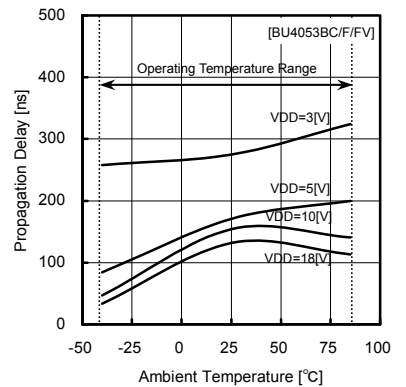


Fig.35 propagation delay time tPLZ (CONT – OUT)

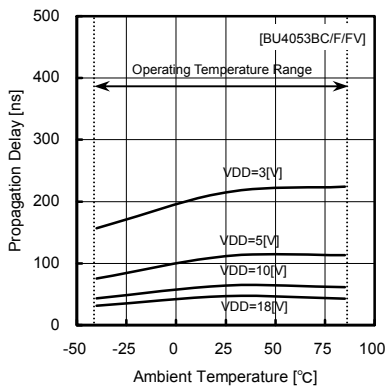


Fig.36 propagation delay time tPZL (CONT – OUT)

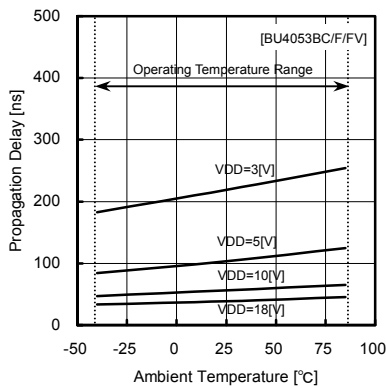


Fig.37 propagation delay time tPZH (INH – OUT)

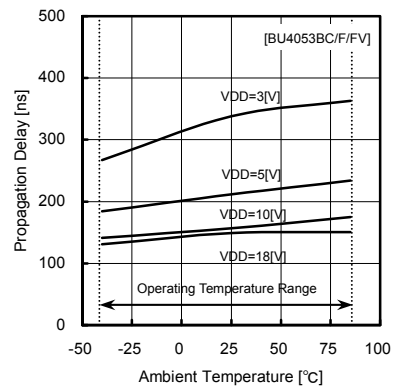


Fig.38 propagation delay time tPHZ (INH – OUT)

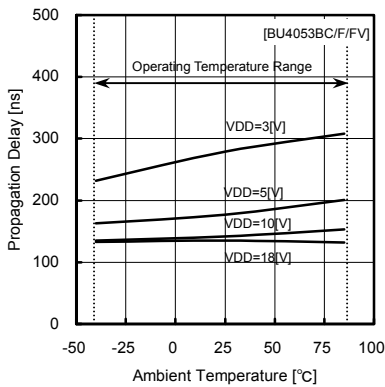


Fig.39 propagation delay time tPZL (INH – OUT)

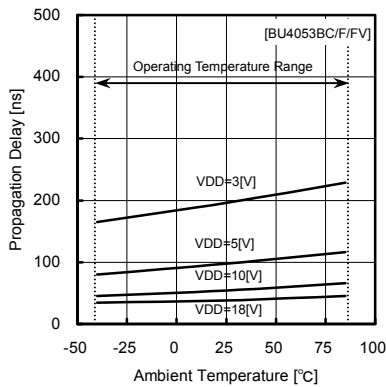


Fig.40 propagation delay time tPLZ (INH – OUT)

●Reference Data(BU4551B)

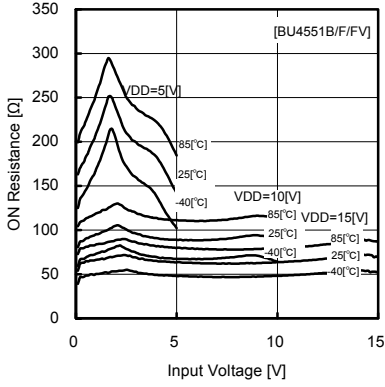


Fig.41 ON resistance – input voltage

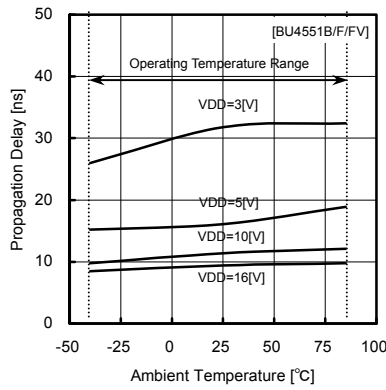


Fig.42 propagation delay time tPLH (IN – OUT)

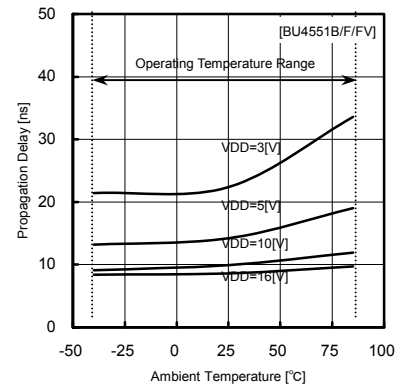


Fig.43 propagation delay time tPHL (IN – OUT)

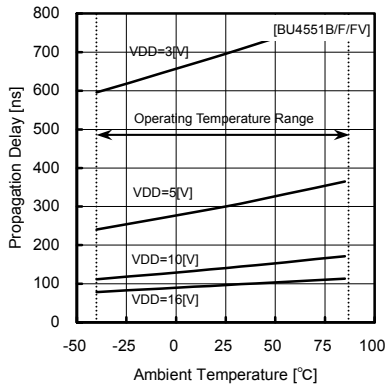


Fig.44 propagation delay time tPZH (CONT – OUT)

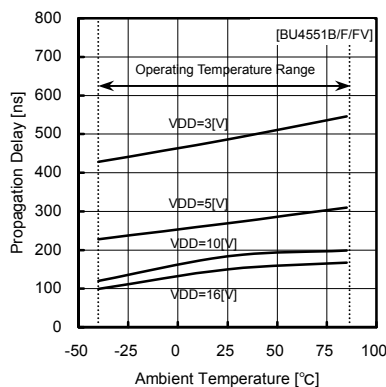


Fig.45 propagation delay time tPHZ (CONT – OUT)

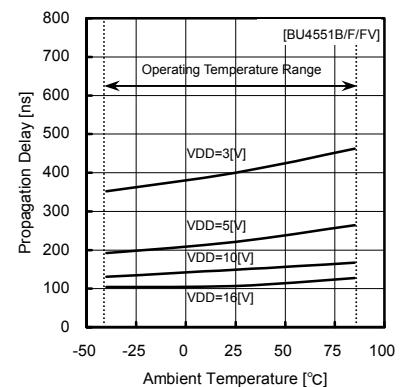


Fig.46 propagation delay time tPLZ (CONT – OUT)


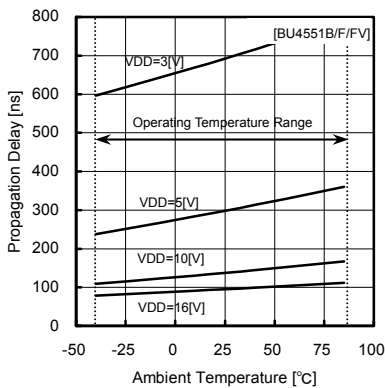


Fig.47 propagation delay time tPZL (CONT – OUT)

● Pin Configuration • Pin Function • Block Diagram • Truth Table

1) BU4066BC Series

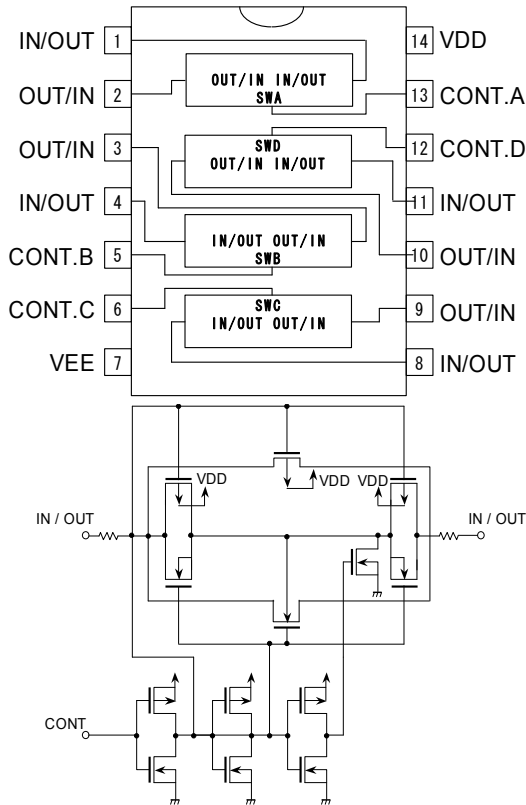


PIN FUNCTION

| PIN No. | PIN NAME | I/O | PIN FUNCTION |
|---------|----------|-----|------------------------------|
| 1 | IN/OUT | I/O | Analog Switch Input / Output |
| 2 | OUT/IN | I/O | Analog Switch Input / Output |
| 3 | OUT/IN | I/O | Analog Switch Input / Output |
| 4 | IN/OUT | I/O | Analog Switch Input / Output |
| 5 | CONT.B | I | Control Input |
| 6 | CONT.C | I | Control Input |
| 7 | VEE | - | Power Supply(-) |
| 8 | IN/OUT | I/O | Analog Switch Input / Output |
| 9 | OUT/IN | I/O | Analog Switch Input / Output |
| 10 | OUT/IN | I/O | Analog Switch Input / Output |
| 11 | IN/OUT | I/O | Analog Switch Input / Output |
| 12 | CONT.D | I | Control Input |
| 13 | CONT.A | I | Control Input |
| 14 | VDD | - | Power Supply(+) |

TRUTH TABLE

| CONTROL | ON SWITCH |
|---------|----------------|
| A | A(1pin-2pin) |
| B | B(3pin-4pin) |
| C | C(8pin-9pin) |
| D | D(10pin-11pin) |

2) BU4051BC Series

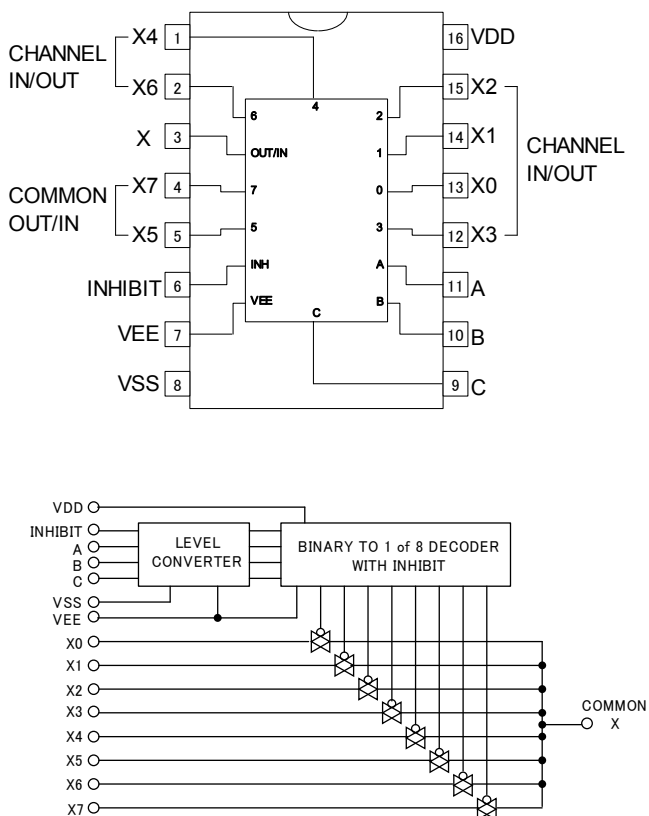



PIN FUNCTION

| PIN No. | PIN NAME | I/O | PIN FUNCTION |
|---------|----------|-----|------------------------------|
| 1 | X4 | I/O | Analog Switch Input / Output |
| 2 | X6 | I/O | Analog Switch Input / Output |
| 3 | X | I/O | Analog Switch Input / Output |
| 4 | X7 | I/O | Analog Switch Input / Output |
| 5 | X5 | I/O | Analog Switch Input / Output |
| 6 | INHIBIT | I | Control Input |
| 7 | VEE | - | Power Supply(-) |
| 8 | VSS | - | Power Supply(-) |
| 9 | C | I | Control Input |
| 10 | B | I | Control Input |
| 11 | A | I | Control Input |
| 12 | X3 | I/O | Analog Switch Input / Output |
| 13 | X0 | I/O | Analog Switch Input / Output |
| 14 | X1 | I/O | Analog Switch Input / Output |
| 15 | X2 | I/O | Analog Switch Input / Output |
| 16 | VDD | - | Power Supply(+) |

TRUTH TABLE

| INHIBIT | A | B | C | ON SWITCH |
|---------|---|---|---|-----------|
| L | L | L | L | X0 |
| L | H | L | L | X1 |
| L | L | H | L | X2 |
| L | H | H | L | X3 |
| L | L | L | H | X4 |
| L | H | L | H | X5 |
| L | L | H | H | X6 |
| L | H | H | H | X7 |
| H | X | X | X | NONE |

3) BU4052BC Series

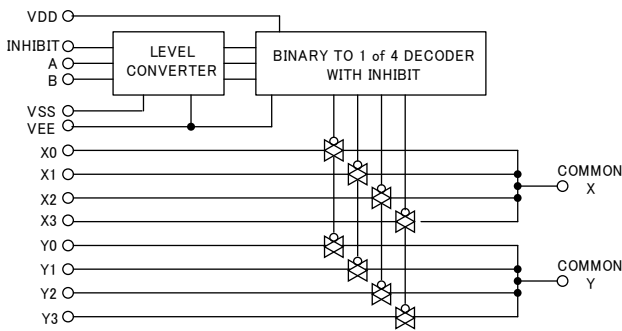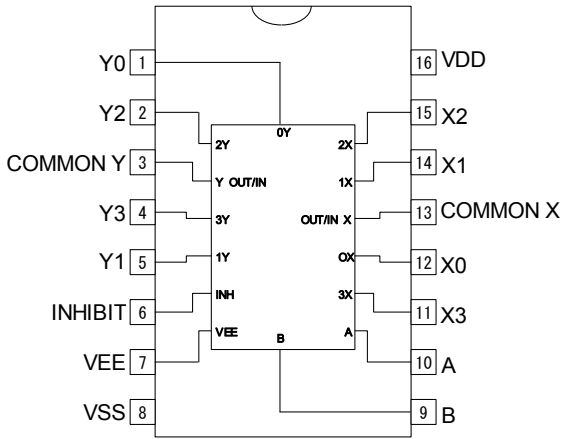



PIN FUNCTION

| PIN No. | PIN NAME | I/O | PIN FUNCTION |
|---------|----------|-----|------------------------------|
| 1 | Y0 | I/O | Analog Switch Input / Output |
| 2 | Y2 | I/O | Analog Switch Input / Output |
| 3 | COMMON Y | I/O | Analog Switch Input / Output |
| 4 | Y3 | I/O | Analog Switch Input / Output |
| 5 | Y1 | I/O | Analog Switch Input / Output |
| 6 | INHIBIT | I | Control Input |
| 7 | VEE | - | Power Supply(-) |
| 8 | VSS | - | Power Supply(-) |
| 9 | B | I | Control Input |
| 10 | A | I | Control Input |
| 11 | X3 | I/O | Analog Switch Input / Output |
| 12 | X0 | I/O | Analog Switch Input / Output |
| 13 | COMMON X | I/O | Analog Switch Input / Output |
| 14 | X1 | I/O | Analog Switch Input / Output |
| 15 | X2 | I/O | Analog Switch Input / Output |
| 16 | VDD | - | Power Supply(+) |

TRUTH TABLE

| INHIBIT | A | B | ON SWITCH |
|---------|---|---|-----------|
| L | L | L | X0, Y0 |
| L | H | L | X1, Y1 |
| L | L | H | X2, Y2 |
| L | H | H | X3, Y3 |
| H | X | X | NONE |

4) BU4053BC Series

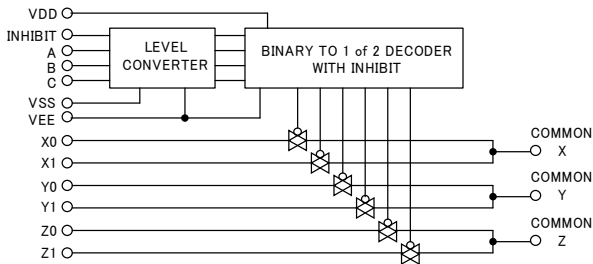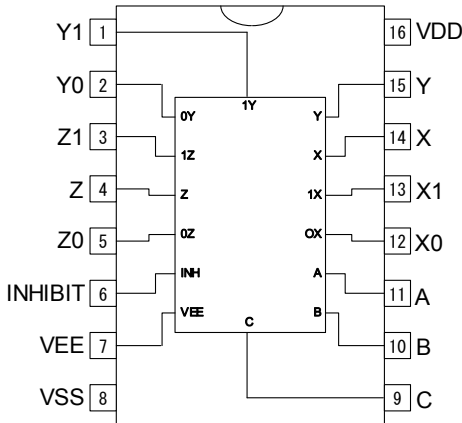



PIN FUNCTION

| PIN No. | PIN NAME | I/O | PIN FUNCTION |
|---------|----------|-----|------------------------------|
| 1 | Y1 | I/O | Analog Switch Input / Output |
| 2 | Y0 | I/O | Analog Switch Input / Output |
| 3 | Z1 | I/O | Analog Switch Input / Output |
| 4 | Z | I/O | Analog Switch Input / Output |
| 5 | Z0 | I/O | Analog Switch Input / Output |
| 6 | INHIBIT | I | Control Input |
| 7 | VEE | - | Power Supply(-) |
| 8 | VSS | - | Power Supply(-) |
| 9 | C | I | Control Input |
| 10 | B | I | Control Input |
| 11 | A | I | Analog Switch Input / Output |
| 12 | X0 | I/O | Analog Switch Input / Output |
| 13 | X1 | I/O | Analog Switch Input / Output |
| 14 | X | I/O | Analog Switch Input / Output |
| 15 | Y | I/O | Analog Switch Input / Output |
| 16 | VDD | - | Power Supply(+) |

TRUTH TABLE

| INHIBIT | A | B | C | ON SWITCH |
|---------|---|---|---|------------|
| L | L | L | L | X0, Y0, Z0 |
| L | H | L | L | X1, Y0, Z0 |
| L | L | H | L | X0, Y1, Z0 |
| L | H | H | L | X1, Y1, Z0 |
| L | L | L | H | X0, Y0, Z1 |
| L | H | L | H | X1, Y0, Z1 |
| L | L | H | H | X0, Y1, Z1 |
| L | H | H | H | X1, Y1, Z1 |
| H | X | X | X | NONE |

5) BU4551B Series

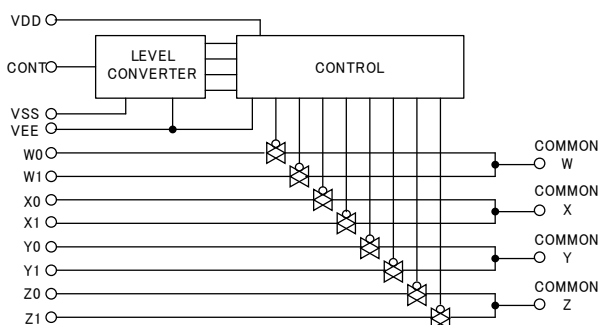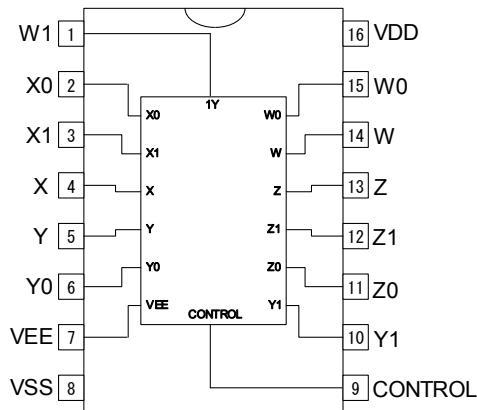

PIN FUNCTION

| PIN No. | PIN NAME | I/O | PIN FUNCTION |
|---------|----------|-----|------------------------------|
| 1 | W1 | I/O | Analog Switch Input / Output |
| 2 | X0 | I/O | Analog Switch Input / Output |
| 3 | X1 | I/O | Analog Switch Input / Output |
| 4 | X | I/O | Analog Switch Input / Output |
| 5 | Y | I/O | Analog Switch Input / Output |
| 6 | Y0 | I/O | Control Input |
| 7 | VEE | - | Power Supply(-) |
| 8 | VSS | - | Power Supply(-) |
| 9 | CONTROL | I | Control Input |
| 10 | Y1 | I/O | Control Input |
| 11 | Z0 | I/O | Analog Switch Input / Output |
| 12 | Z1 | I/O | Analog Switch Input / Output |
| 13 | Z | I/O | Analog Switch Input / Output |
| 14 | W | I/O | Analog Switch Input / Output |
| 15 | W0 | I/O | Analog Switch Input / Output |
| 16 | VDD | - | Power Supply(+) |

TRUTH TABLE

| CONTROL | ON SWITCH |
|---------|-------------|
| 0 | W0,X0,Y0,Z0 |
| 1 | W1,X1,Y1,Z1 |



●Notes for use

- Absolute maximum ratings**
 An excess in the absolute maximum ratings, such as supply voltage, temperature range of operating conditions, etc., can break down the devices, thus making impossible to identify breaking mode, such as short circuit or an open circuit. If any over rated values will expect to exceed the absolute maximum ratings, consider adding circuit protection devices, such as fuses.
- Connecting the power supply connector backward**
 Connecting of the power supply in reverse polarity can damage IC. Take precautions when connecting the power supply lines. An external direction diode can be added.
- Power Supply lines**
 Design PCB layout pattern to provide low impedance GND and supply lines. To obtain a low noise ground and supply line, separate the ground section and supply lines of the digital and analog blocks. Furthermore, for all power terminals to ICs, connect a capacitor between the power supply and the GND terminal. When applying electrolytic capacitors in the circuit, not that capacitance characteristic values are reduced at low temperatures.
- GND voltage**
 The potential of GND pin must be minimum potential in all operating conditions.
- Thermal design**
 Use a thermal design that allows for a sufficient margin in light of the power dissipation (Pd) in actual operating conditions.
- Inter-pin shorts and mounting errors**
 Use caution when positioning the IC for mounting on printed circuit boards. The IC may be damaged if there is any connection error or if pins are shorted together.
- Actions in strong electromagnetic field**
 Use caution when using the IC in the presence of a strong electromagnetic field as doing so may cause the IC to malfunction.
- Testing on application boards**
 When testing the IC on an application board, connecting a capacitor to a pin with low impedance subjects the IC to stress. Always discharge capacitors after each process or step. Always turn the IC's power supply off before connecting it to or remove it from a jig or fixture during the inspection process. Ground the IC during assembly steps as an antistatic measure. Use similar precaution when transporting or storing the IC.
- Ground Wiring Pattern**
 When using both small signal and large current GND patterns, it is recommended to isolate the two ground patterns, placing a signal ground point at the ground potential of application so that the pattern wiring resistance and voltage variations caused by large currents do not cause variations in the small signal ground voltage. Be careful not to change the GND wiring pattern of any external components, either.



● Ordering part number

| | | | | | | | | | | | | |
|----------|---|----------|---|--------|---|---|--------------------|---|-------------------------------------|---|---|--|
| B | U | 4 | 5 | 5 | 1 | B | F | V | - | E | 2 | |
| Part No. | | Part No. | | | | | Package | | Packaging and forming specification | | | |
| | | 4066BC | | 4053BC | | | None: DIP14, DIP16 | | E2: Embossed tape and reel | | | |
| | | 4051BC | | 4551B | | | F : SOP14, SOP16 | | None: Tray, Tube | | | |
| | | 4052BC | | | | | FV : SSOP-B14 | | | | | |
| | | | | | | | SSOP-B16 | | | | | |



SOP14

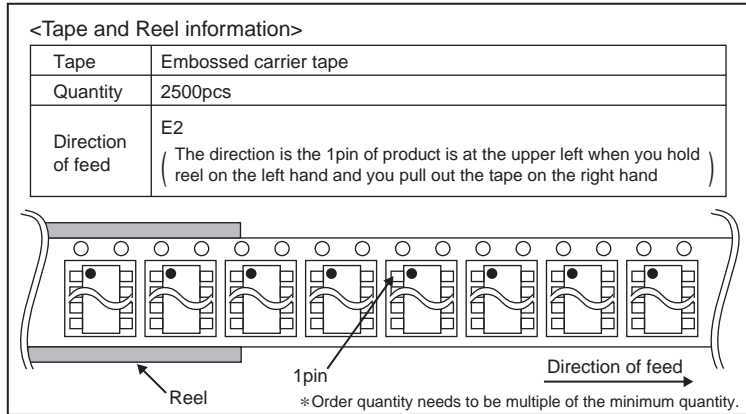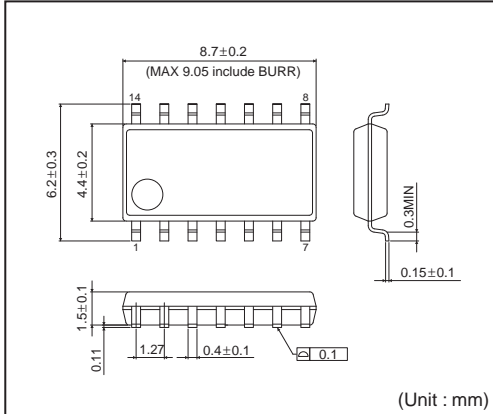


SSOP-B14

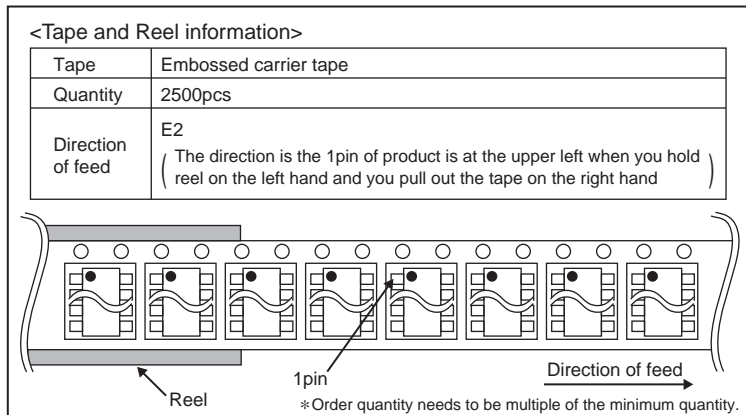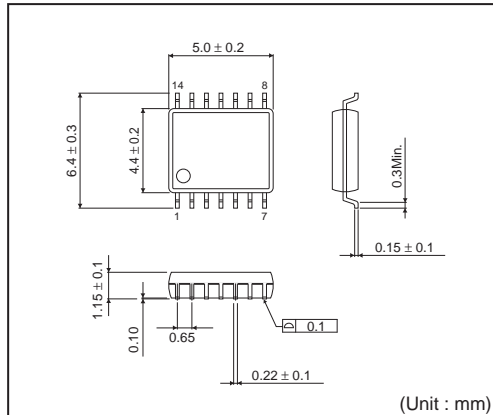

DIP14

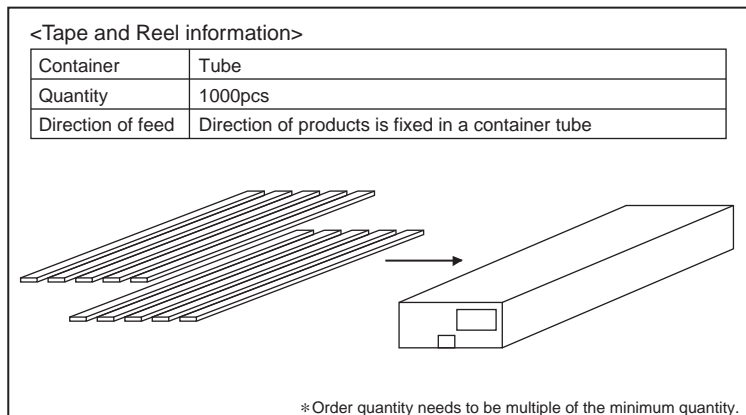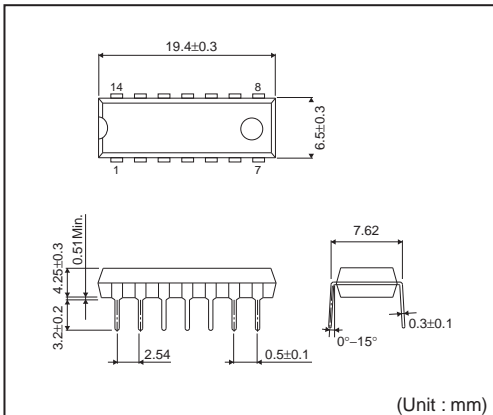


SOP16

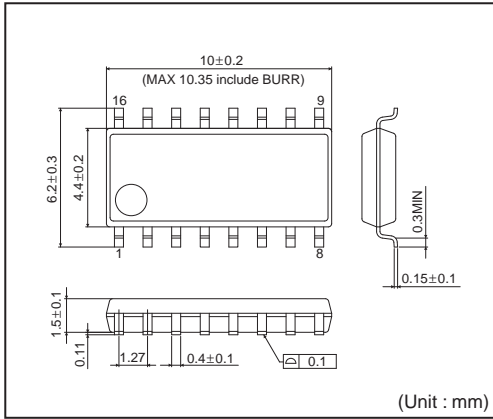


<Tape and Reel information>

| | |
|-------------------|---|
| Tape | Embossed carrier tape |
| Quantity | 2500pcs |
| Direction of feed | E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

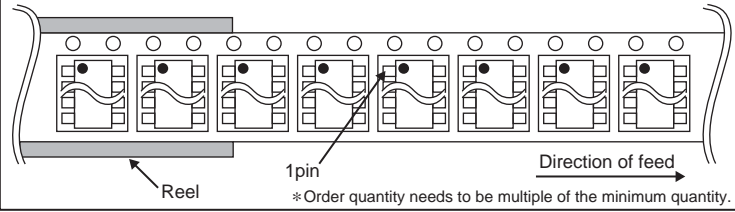


SSOP-B16

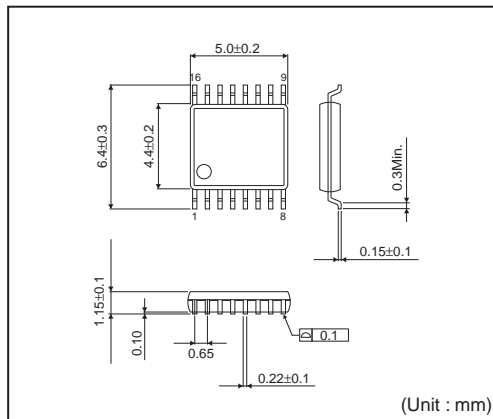


<Tape and Reel information>

| | |
|-------------------|---|
| Tape | Embossed carrier tape |
| Quantity | 2500pcs |
| Direction of feed | E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

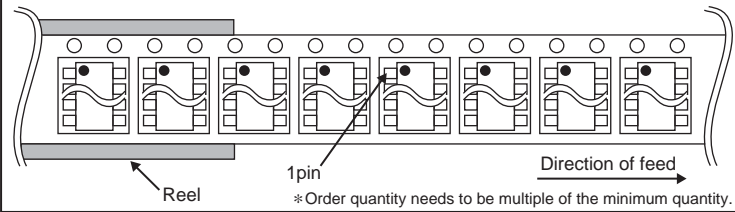


DIP16

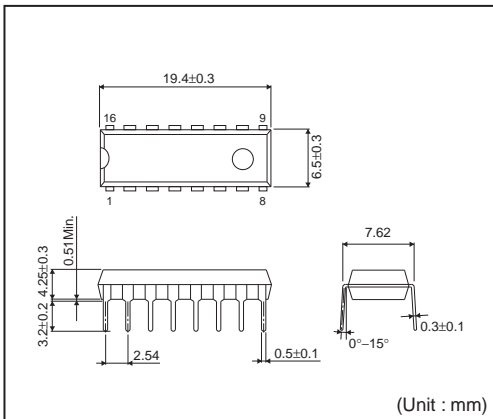

<Tape and Reel information>

| | |
|-------------------|--|
| Container | Tube |
| Quantity | 1000pcs |
| Direction of feed | Direction of products is fixed in a container tube |

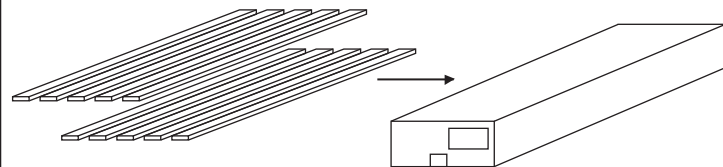

*Order quantity needs to be multiple of the minimum quantity.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>