

APPLICATIONS

- High Power Switching.
- Motor Control.
- UPS.
- AC And DC Servo Drive Amplifiers.

FEATURES

- n - Channel.
- Enhancement Mode.
- High Input Impedance.
- High Switching Speed.
- Latch-Free Operation.
- Low Forward Voltage Drop.
- Isolated Base.
- Short Circuit Capability (10μs).

CIRCUIT

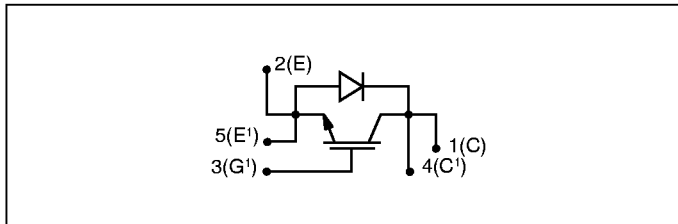


Fig.1 Single switch circuit diagram

TYPICAL KEY PARAMETERS

V_{CES}	1600V
$V_{CE(sat)}$	3.3V
$I_{C(CONT)}$	300A
$I_{C(PK)}$	600A
t_r	270ns
t_f	590ns

PACKAGE OUTLINE

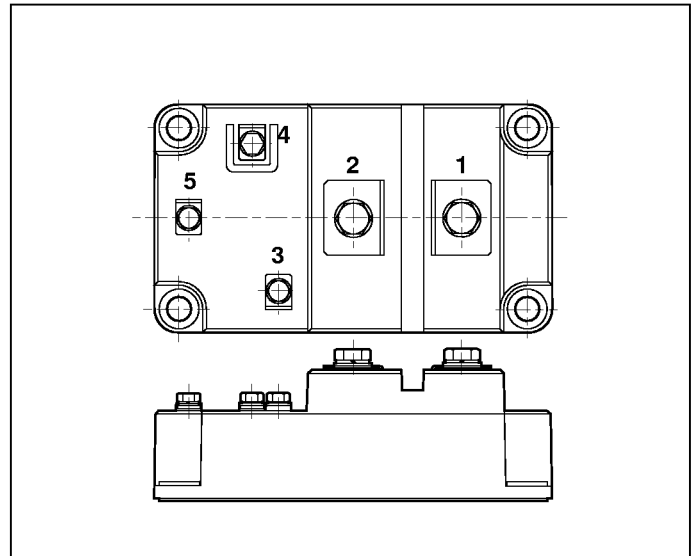


Fig. 2

Outline type code: L. See package details for further information.

RATINGS

$T_{case} = 25^{\circ}C$ unless stated otherwise.				
Symbol	Parameter	Test Conditions	Max.	Units
V_{CES}	Collector-emitter voltage	$V_{GE} = 0V$	1600	V
V_{GES}	Gate-emitter voltage	-	± 20	V
I_C	Collector current	DC, $T_{case} = 75^{\circ}C$	300	A
$I_{C(PK)}$		1ms, $T_{case} = 75^{\circ}C$	600	A
P_{max}	Maximum power dissipation		2500	W
V_{isol}	Isolation voltage	Commoned terminals to base plate. AC RMS, 1 min, 50Hz	2500	V

GP300LSS16S

THERMAL AND MECHANICAL RATINGS

Symbol	Parameter	Conditions	Min.	Max.	Units
$R_{th(j-c)}$	Thermal resistance	DC junction to case	-	0.05	°C/W
$R_{th(c-h)}$	Thermal resistance - Case to heatsink	Mounting torque 5Nm (with mounting grease)	-	0.007	°C/W
T_j	Junction temperature	-	-	150	°C
T_{stg}	Storage temperature range	-	-40	150	°C
-	Screw torque (mounting)	-	-	6.0	Nm

DC ELECTRICAL CHARACTERISTICS

$T_{case} = 25^\circ\text{C}$ unless stated otherwise.						
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
I_{CES}	Collector cut-off current	$V_{GE} = 0V, V_{CE} = V_{CES}$	-	-	12	mA
I_{GES}	Gate leakage current	$V_{GE} = \pm 20V$	-	-	± 2	μA
$V_{GE(TH)}$	Gate threshold voltage	$I_C = 20\text{mA}, V_{GE} = V_{CE}$	4	-	7.5	V
$V_{CE(SAT)}$	Collector-emitter saturation voltage	$V_{GE} = 15V, I_C = 300A$	-	3.3	4.1	V
		$V_{GE} = 15V, I_C = 300A, T_{case} = 125^\circ\text{C}$	-	4.1	5.1	V

DIODE DC CHARACTERISTICS

$T_{case} = 25^\circ\text{C}$ unless stated otherwise.						
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
I_F	Diode forward current	DC, $T_{case} = 75^\circ\text{C}$	-	-	200	A
I_{FM}	Diode maximum forward current	$T_{case} = 75^\circ\text{C}, t_p = 1\text{ms}$	-	-	600	A
V_F	Diode forward voltage	$I_F = 300A$	-	2.4	2.8	V
$R_{th(j-c)}$	Thermal resistance	DC junction to case	-	-	0.17	°C/W

AC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
C_{ies}	Input capacitance	$V_{CE} = 25V, V_{GE} = 0V, f = 1\text{MHz}$	-	48000	-	pF
C_{obs}	Output capacitance	$V_{CE} = 25V, V_{GE} = 0V, f = 1\text{MHz}$	-	2400	-	pF
C_{res}	Reverse transfer capacitance	$V_{CE} = 25V, V_{GE} = 0V, f = 1\text{MHz}$	-	2400	-	pF

INDUCTIVE SWITCHING CHARACTERISTICS

For definition of switching waveforms, refer to figures 6 and 7 shown in application note AN4504 IGBT Ratings and Characteristics.

T_{case} = 125°C unless stated otherwise.						
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
t _{d(off)}	Turn-off delay time	$I_C = 300A,$ $V_{GE} = \pm 15V,$ $V_{CE} = 50\% V_{CES},$ $R_{G(ON)} = R_{G(OFF)} = 1.5\Omega$	-	550	-	ns
t _f	Fall time		-	590	-	ns
E _{OFF}	Turn-off energy loss		-	80	-	mJ
t _{d(on)}	Turn-on delay time		-	790	-	ns
t _r	Rise time		-	270	-	ns
E _{ON}	Turn-on energy loss		-	172	-	mJ

DIODE DYNAMIC CHARACTERISTICS (INDUCTIVE)

T_{case} = 125°C unless stated otherwise.						
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
t _{rr}	Reverse recovery time	$T_{case} = 25^\circ C, I_F = 300A,$ $V_R = 50\%V_{CES}, di_F/dt = 1200A/\mu s$	-	270	-	ns
Q _{rr}	Reverse recovery charge		-	34	-	μC
t _{rr}	Reverse recovery time	$I_F = 300A$ $V_R = 50\%V_{CES}, di_F/dt = 1200A/\mu s$	-	420	-	ns
Q _{rr}	Reverse recovery charge		-	62	-	μC

GP300LSS16S

CURVES

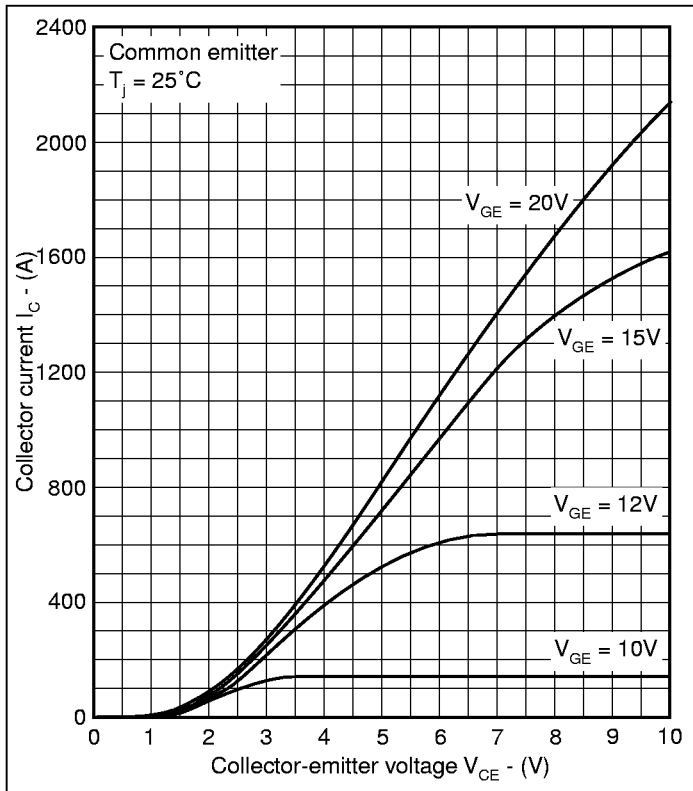


Fig.3 Typical output characteristics @ 25°C

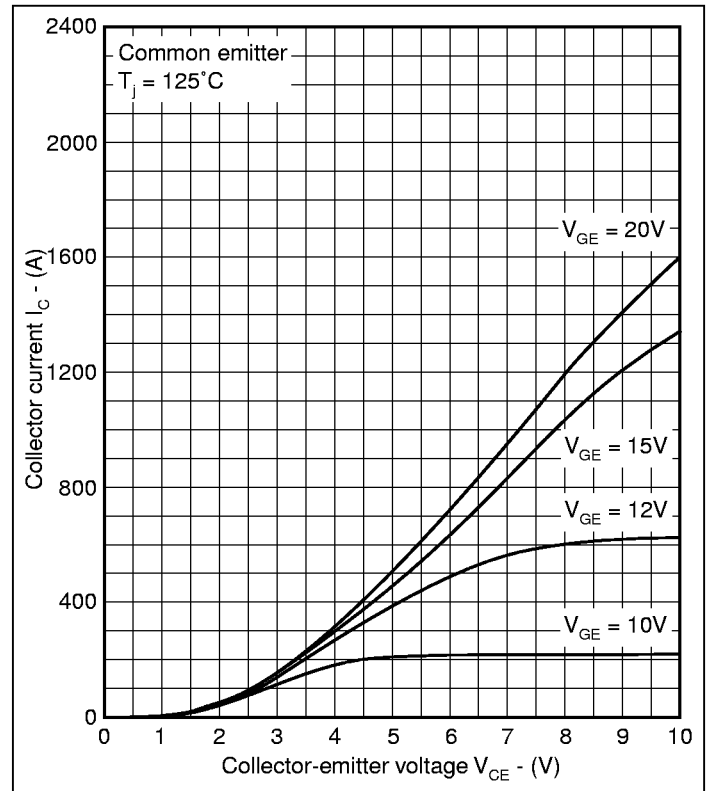


Fig.4 Typical output characteristics @ 125°C

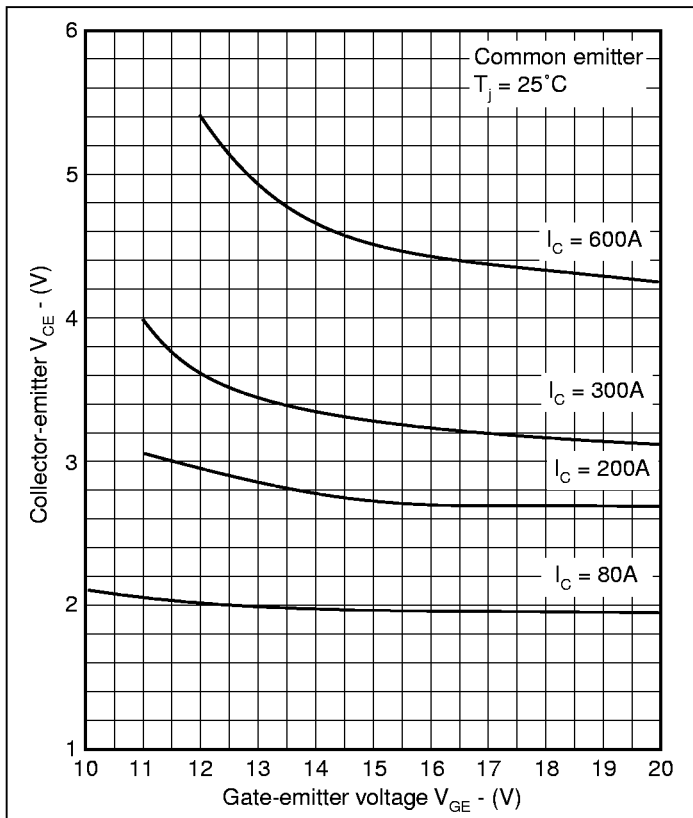


Fig.5 Typical transfer characteristics @ 25°C

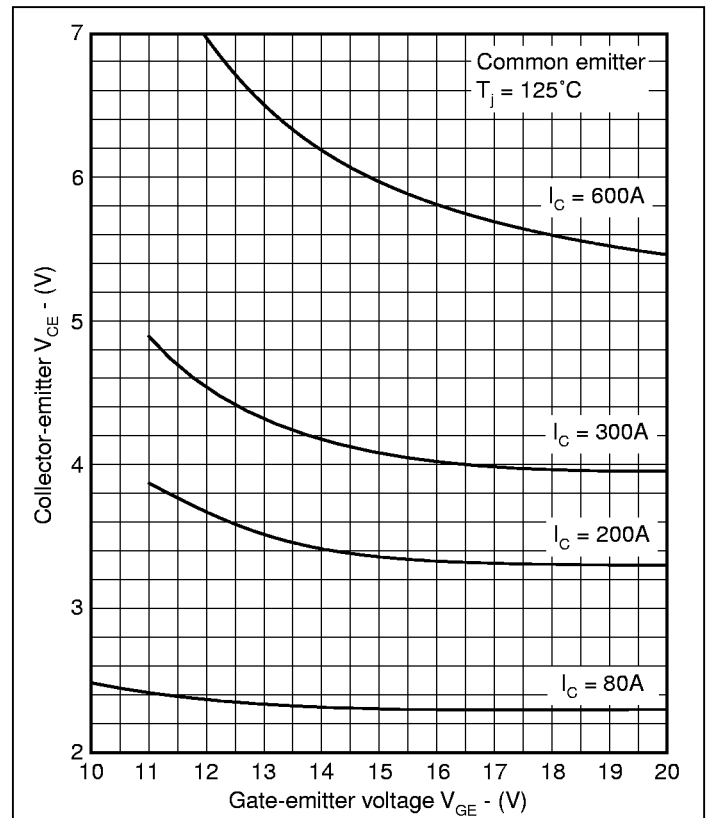


Fig.6 Typical transfer characteristics @ 125°C

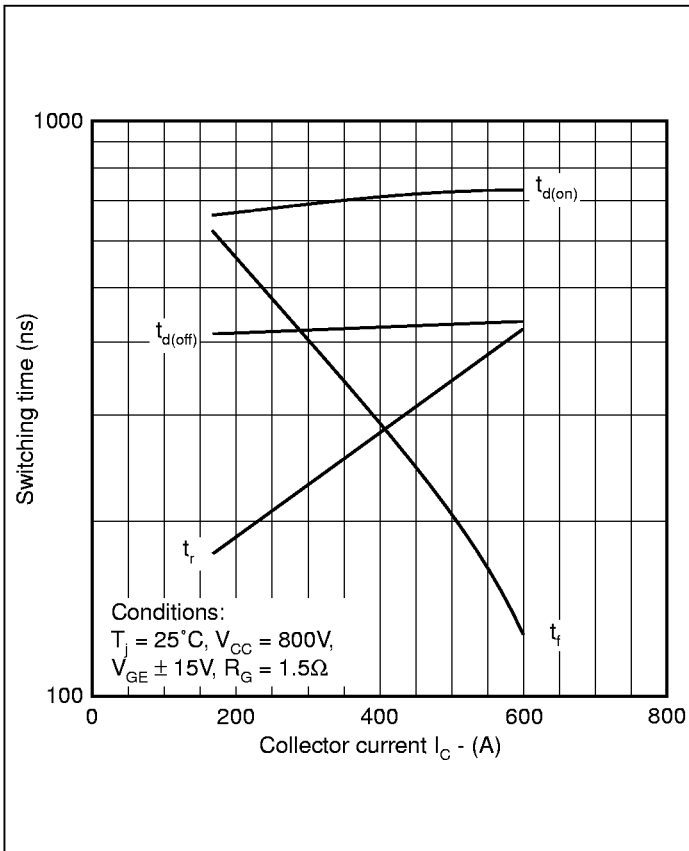


Fig.7 Typical switching time vs I_C @ 25°C

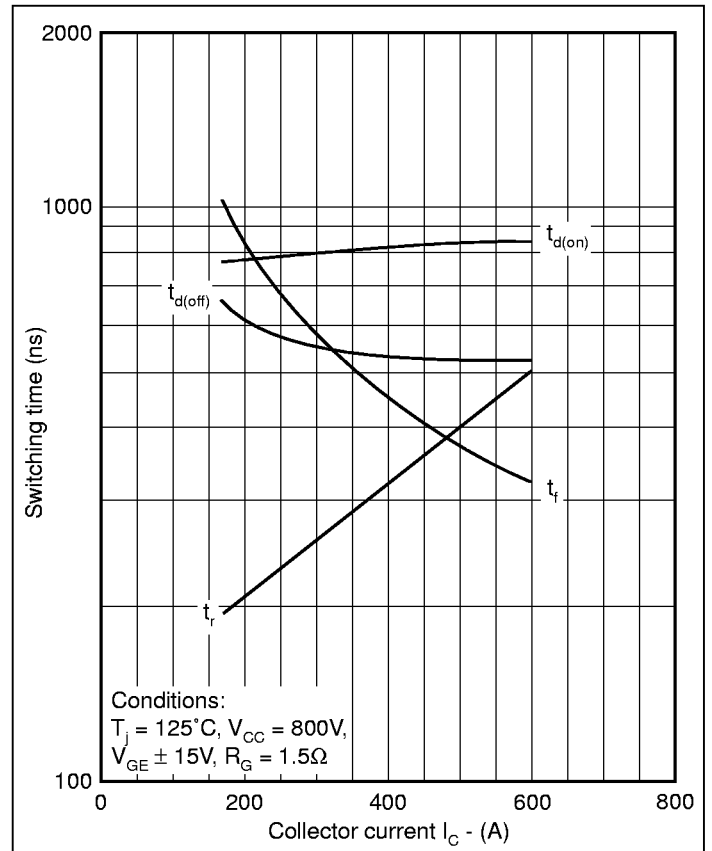


Fig.8 Typical switching time vs I_C @ 125°C

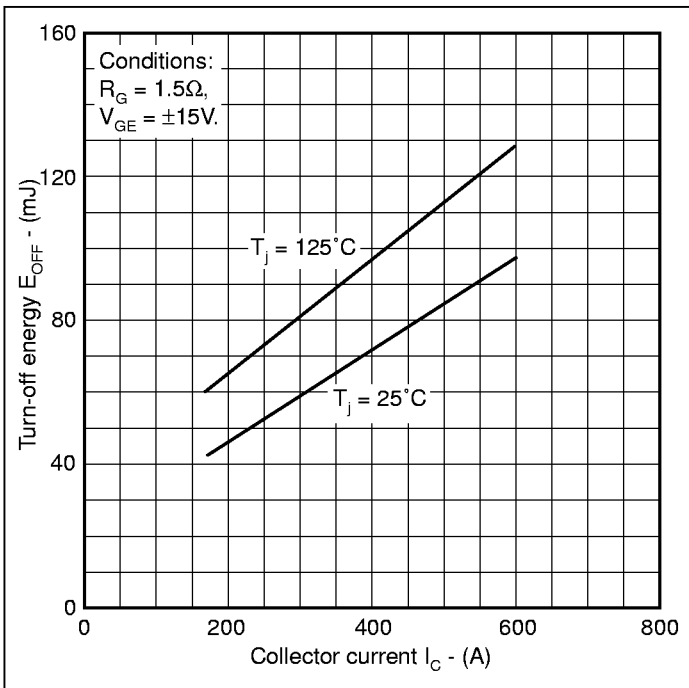


Fig.9 Typical turn-off losses

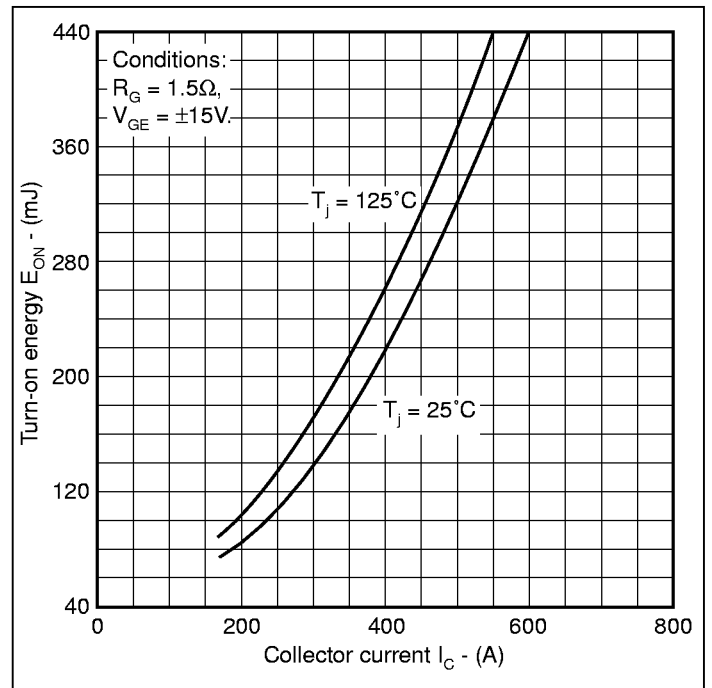


Fig.10 Typical turn-on losses

GP300LSS16S

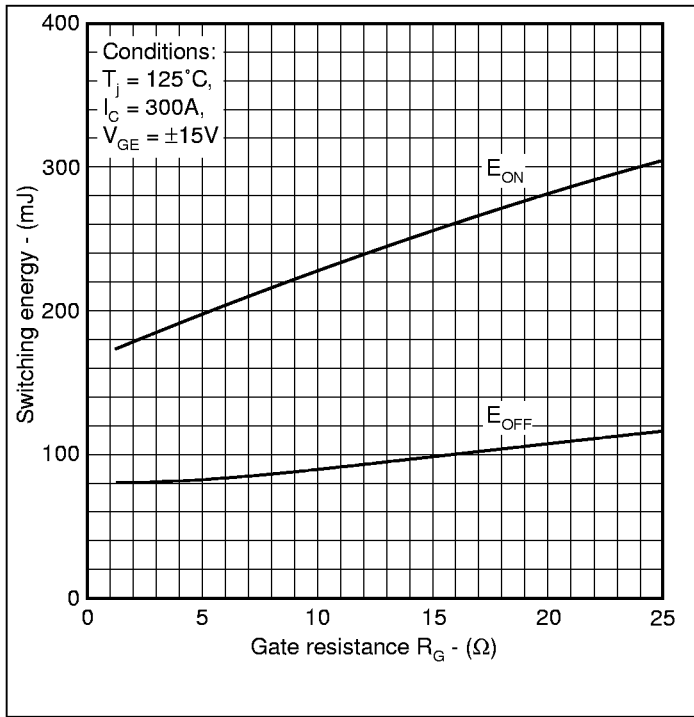


Fig.11 Typical switching energy @125°C

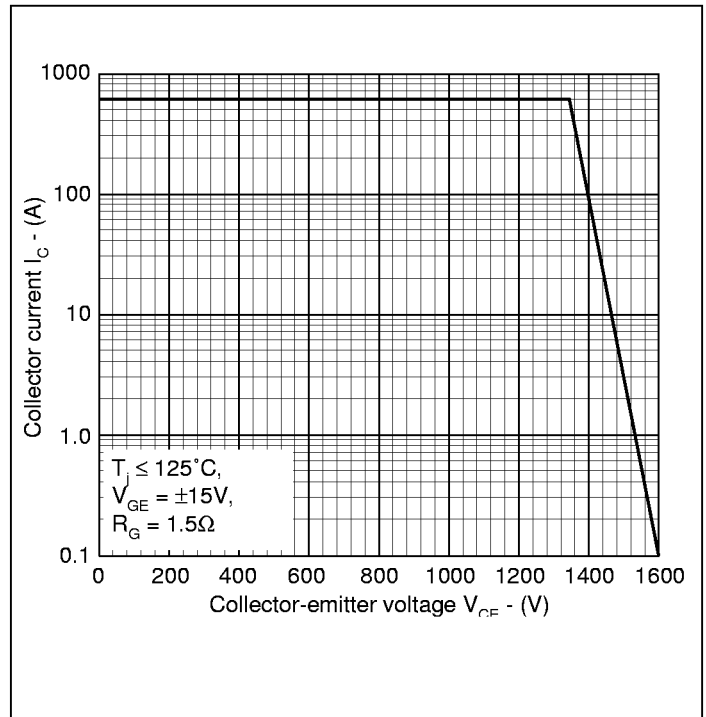


Fig.12 Reverse bias safe operating area

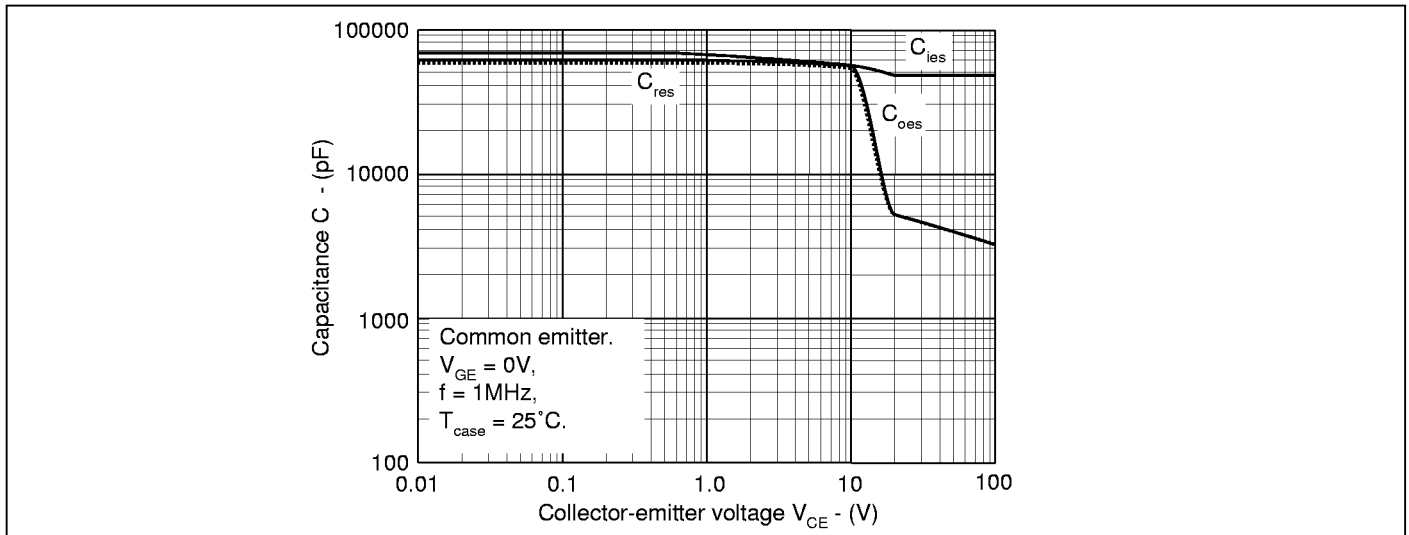


Fig.13 Typical capacitance

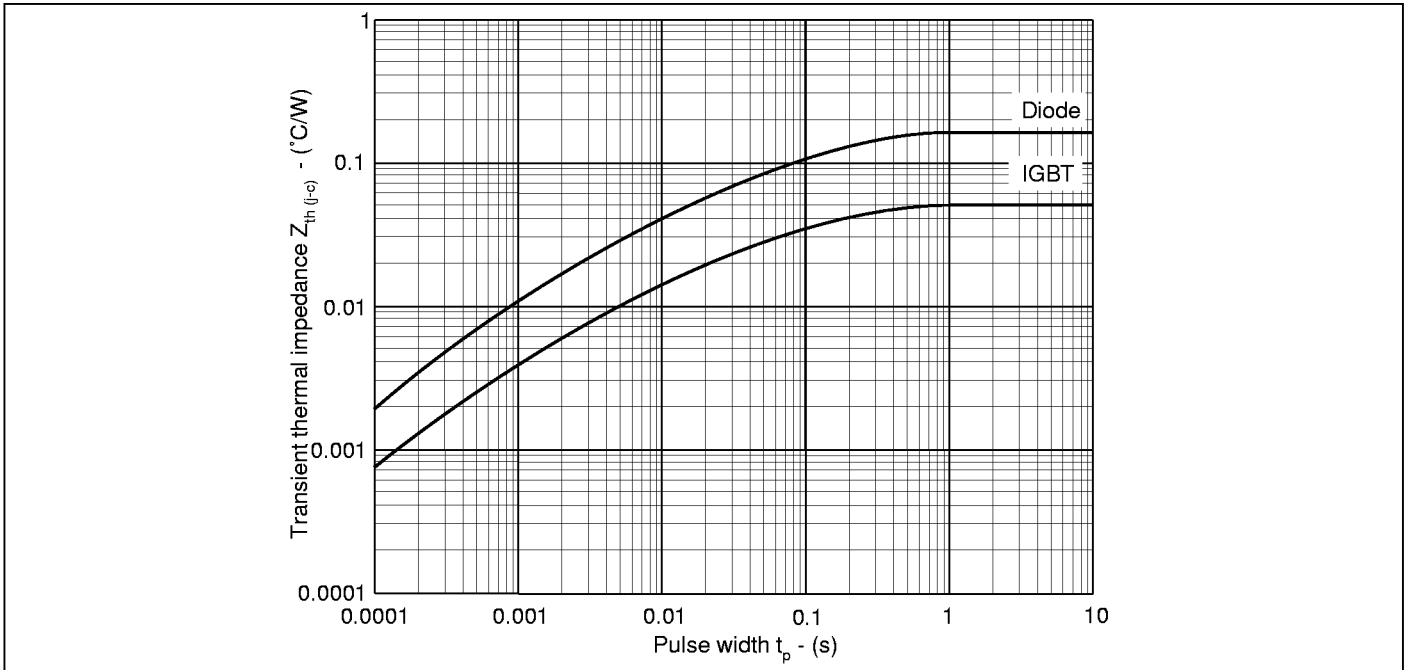


Fig.14 Transient thermal impedance


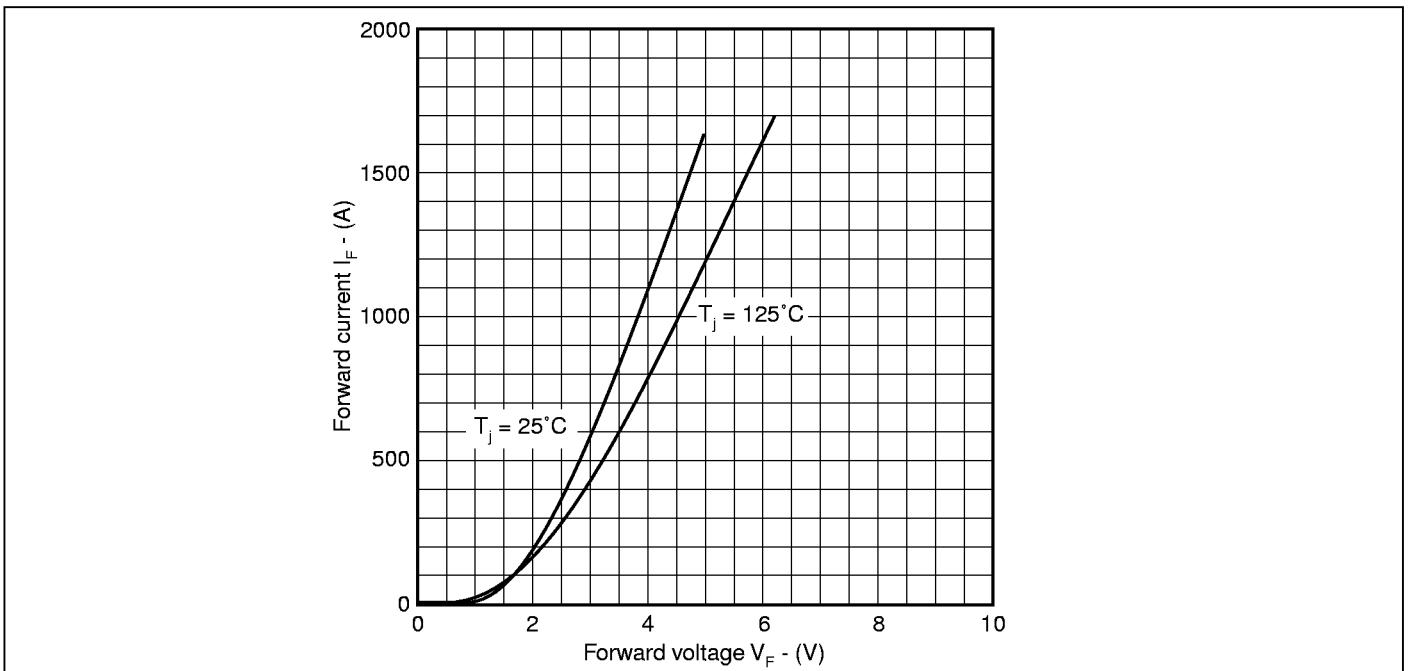


Fig.15 Typical diode forward characteristics

GP300LSS16S

PACKAGE DETAILS - L

For further package information, please contact your local Customer Service Centre. All dimensions in mm, unless stated otherwise. DO NOT SCALE.

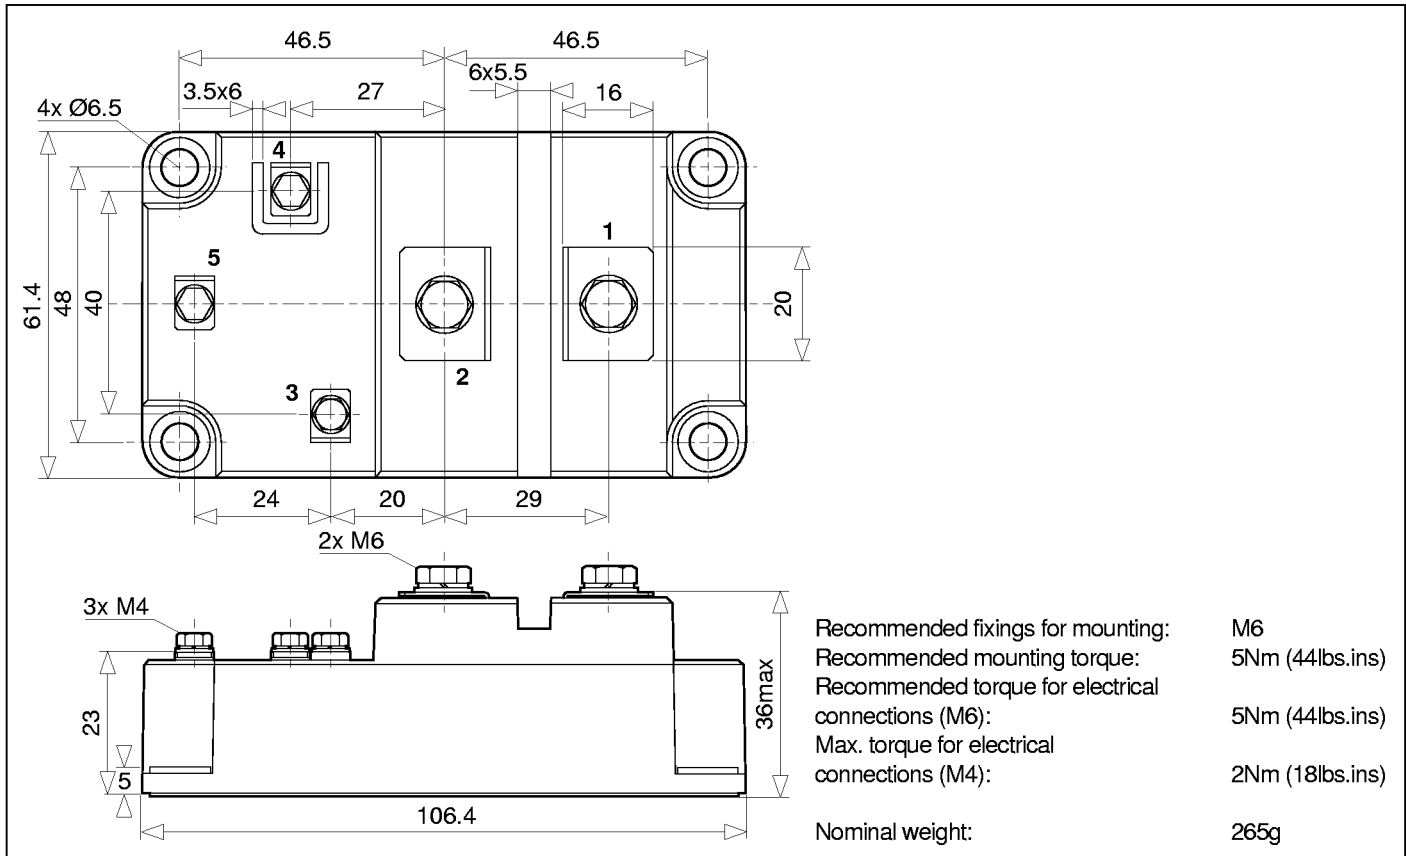

HEADQUARTERS OPERATIONS
MITEL SEMICONDUCTOR
Cheney Manor, Swindon,
Wiltshire SN2 2QW, United Kingdom.
Tel: (01793) 518000
Fax: (01793) 518411

MITEL SEMICONDUCTOR
1500 Green Hills Road,
Scotts Valley, California 95066-4922
United States of America.
Tel (408) 438 2900
Fax: (408) 438 5576/6231

Internet: <http://www.gpsemi.com>
POWER PRODUCT CUSTOMER SERVICE CENTRES
● **FRANCE, BENELUX & SPAIN** Les Ulis Cedex Tel: (1) 69 18 90 00 Fax : (1) 64 46 54 50
● **GERMANY** Munich Tel: (089) 419508-20 Fax : (089) 419508-55
● **NORTH AMERICA** Dedham, USA Tel: (781) 251 0126 Fax: (781) 251 0106
● **UK** Lincoln Tel: (01522) 500500 Fax : (01522) 510550

These are supported by Agents and Distributors in major countries world-wide.
© Mitel Corporation 1998 Publication No. DS4136-5 Issue No. 5.3 March 1998
TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRINTED IN UNITED KINGDOM

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.