


**FEATURES**

- Low power loss, high efficiency
- Low profile surface mount package
- Built-in strain relief
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

**MECHANICAL DATA**

**Case:** JEDEC DO-214AC molded plastic body  
**Terminals:** Solder plated, solderable per MIL-STD750, Method 2026  
 High temperature soldering guaranteed: 250°C/10 seconds at terminals  
**Polarity:** Color band denotes cathode end  
**Weight:** 0.002 ounce, 0.064 gram

DO-214AC(SMA)

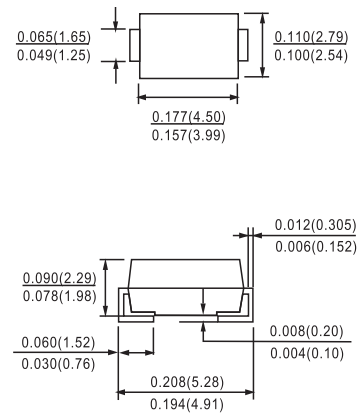**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS****Maximum Ratings and Thermal Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	SSA33L	SSA34	Unit
Device marking code		33L	S34	V
Maximum repetitive peak reverse voltage	$V_{RRM}$	30	40	V
Maximum RMS voltage	$V_{RMS}$	21	28	V
Maximum DC blocking voltage	$V_{DC}$	30	40	V
Maximum average forward rectified current at $T_L$ (See Fig. 1)	$I_{F(AV)}$	3.0		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	75		A
Typical thermal resistance <sup>(2)</sup>	$R_{\theta JA}$	110		$^\circ\text{C/W}$
	$R_{\theta JL}$	28		
Voltage rate of change (rated $V_R$ )	$dv/dt$	10,000		$\text{V}/\mu\text{s}$
Operating junction temperature range	$T_J$	-65 to +150		$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-65 to +150		$^\circ\text{C}$

**Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Typ.	Max.	Typ.	Max.	Unit
Maximum instantaneous forward voltage at 3.0A <sup>(1)</sup>	$V_F$	0.43	0.45	0.46	0.49	V
		$T_J=25^\circ\text{C}$		$T_J=125^\circ\text{C}$		
		0.34	0.38	0.38	0.42	
Maximum DC reverse current at rated DC blocking voltage <sup>(1)</sup>	$I_R$	—	0.5	—	0.2	mA
		$T_J=25^\circ\text{C}$		$T_J=125^\circ\text{C}$		
		20	35	17	30	

**Notes:** (1) Pulse test: 300 $\mu\text{s}$  pulse width, 1% duty cycle  
 (2) Aluminum substrate mounted



RATINGS AND CHARACTERISTIC CURVES

SSA33L and SSA34

Fig. 1 – Forward Current Derating Curve

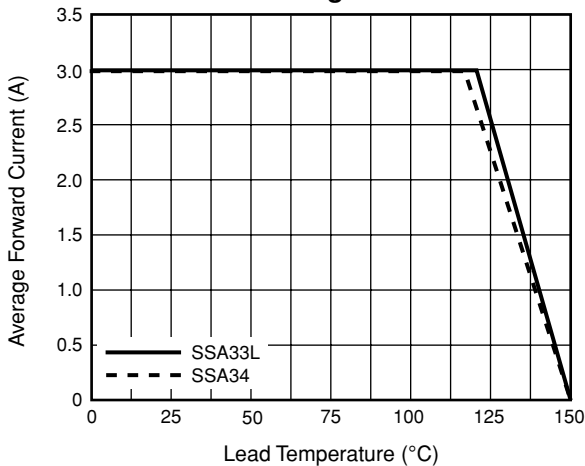


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

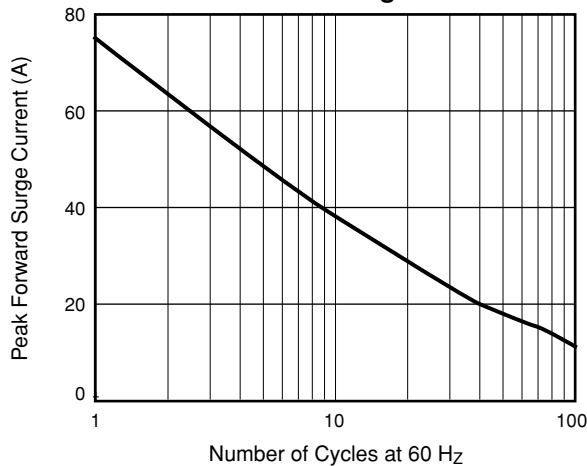


Fig. 3 – Typical Instantaneous Forward Characteristics

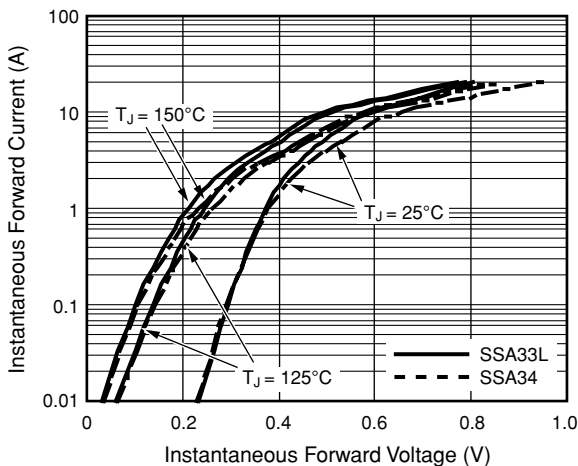


Fig. 4 – Typical Reverse Characteristics

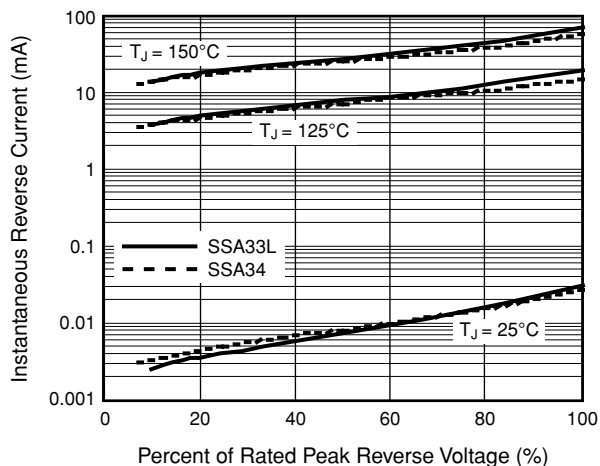


Fig. 5 – Typical Junction Capacitance

