




**1213EF**

**Epoxy Case  
(Axial Leads)**

Lead Specs.

Tinned Copperweld  
Under .190T = 24 AWG  
.190 - .380T = 22 AWG  
Above .380T = 20 AWG

**Metallized  
Polypropylene  
Capacitors**

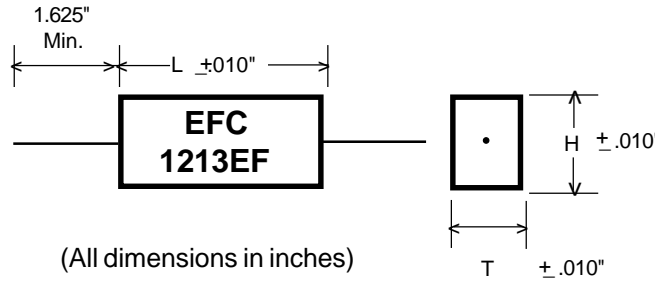

**DIMENSIONS and RATINGS**

Cap. μF	1213EF-1 50 VDC			1213EF-2 100 -150 VDC			1213EF-3 200 VDC			1213EF-3 400 VDC			1213EF-3 600 VDC					
	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L			
.001	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0012	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0015	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0022	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0027	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0039	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0047	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0056	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0068	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0082	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.01	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.420	.170	.290	.570			
.012	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.420	.230	.360	.550			
.015	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570	.230	.360	.550			
.018	.160	.240	.420	.160	.240	.420	.170	.290	.420	.170	.290	.570	.230	.360	.550			
.022	.160	.240	.420	.160	.240	.420	.170	.290	.570	.170	.290	.570	.290	.420	.570			
.027	.160	.240	.420	.170	.290	.420	.170	.290	.570	.170	.290	.570	.290	.420	.570			
.033	.170	.290	.420	.170	.290	.550	.170	.290	.570	.230	.360	.550	.290	.420	.670			
.039	.170	.290	.420	.170	.290	.550	.170	.290	.570	.230	.360	.550	.290	.420	.670			
.047	.170	.290	.550	.170	.290	.550	.230	.360	.550	.230	.360	.550	.290	.420	.670			
.056	.170	.290	.550	.170	.290	.550	.230	.360	.550	.290	.420	.570	.290	.420	.820			
.068	.170	.290	.550	.170	.290	.550	.230	.360	.550	.290	.420	.570	.290	.420	.820			
.082	.170	.290	.550	.230	.360	.550	.290	.420	.570	.290	.420	.670	.390	.540	.820			
.1	.230	.360	.550	.230	.360	.550	.290	.420	.570	.290	.420	.670	.390	.540	.820			
.12	.230	.360	.550	.230	.360	.550	.290	.420	.570	.290	.420	.670	.390	.540	.820			
.15	.230	.360	.550	.290	.420	.570	.290	.420	.670	.290	.420	.820	.390	.540	1.040			
.18	.290	.420	.570	.290	.420	.570	.290	.420	.670	.390	.540	.820	.390	.540	1.240			
.22	.290	.420	.570	.290	.420	.670	.290	.420	.820	.390	.540	.820	.390	.540	1.240			
.27	.290	.420	.570	.290	.420	.670	.390	.540	.820	.390	.540	.820	.560	.720	1.240			
.33	.290	.420	.670	.290	.420	.820	.390	.540	.820	.390	.540	1.040	.560	.720	1.240			
.39	.290	.420	.670	.390	.540	.820	.390	.540	.820	.390	.540	1.240	.560	.720	1.240			
.47	.290	.420	.820	.390	.540	.820	.390	.540	.820	.390	.540	1.240	.560	.720	1.500			
.56	.390	.540	.820	.390	.540	.820	.390	.540	1.040	.560	.720	1.240	.560	.720	1.500			
.68	.390	.540	.820	.390	.540	.820	.390	.540	1.040	.560	.720	1.240						
.82	.390	.540	.820	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240						
1.0	.390	.540	.820	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240						
1.25	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240									
1.5	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240									
2.0	.560	.720	1.240	.560	.720	1.240												
3.0	.560	.720	1.240	.560	.720	1.500												

**ELECTRONIC FILM CAPACITORS, INC.**

Reidville Industrial Park \* 41 Interstate Lane \* WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629

FAX (203) 755-0659

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.