
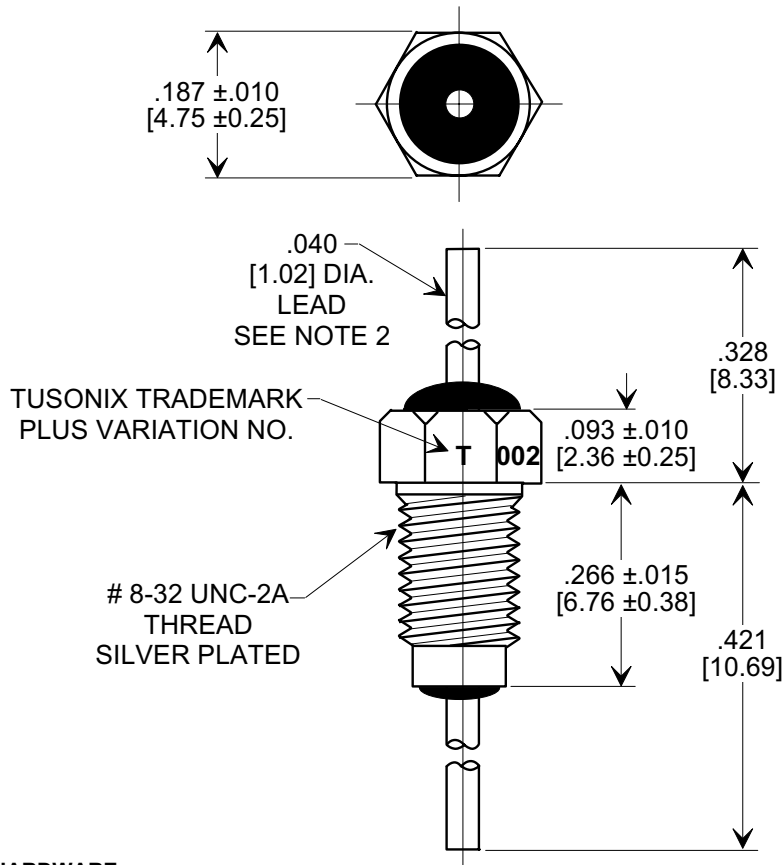




MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



MOUNTING HARDWARE



NOTES:

- TUSONIX STANDARD PART NUMBER: 4404-002.
 TUSONIX RoHS COMPLIANT PART NUMBER: 4404-002 LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- LEAD FINISH: SILVER PLATED.
- PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS.
 STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
- MAX. RECOMMENDED MOUNTING TORQUE: 2.0 Lb.-IN.
- MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C.
- OPERATING TEMPERATURE RANGE: -55°C TO +125°C.

4404	002	50,000	100	10A	15	24	34	41	45	50	60
STYLE	VAR.	MIN. CAP.(pf)	+125 °C	DC CURRENT (AMPS)	1 MHz	3 MHz	10 MHz	30 MHz	100 MHz	300 MHz	1GHz
			DC WORKING VOLTAGE		MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220						

REVISION RECORD Original Release C.O. 950201-2 HARDWARE, NOTES & CAP CHART. S.M. 02-24-95 RE-ISSUE 950201-2 1 ADDED TOLS. 4 PLCS. MIN. INS. LOSS WAS REF. S.M. 11-02-99 19991029-3-02 2 ADDED & REVISED NOTES. S.M. 10-28-05 20051026-6-03 3	--TOLERANCES-- Unless Otherwise Specified		Title BUSHING STYLE EMI FILTER
	DECIMAL ± .031 [0.79]		
	ANGLES ±		Drawn S. M. 02-14-95
	TUSONIX TUCSON, ARIZONA		Approved O. S. 02-14-95
		A	4404-002