




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
16.000000MHz

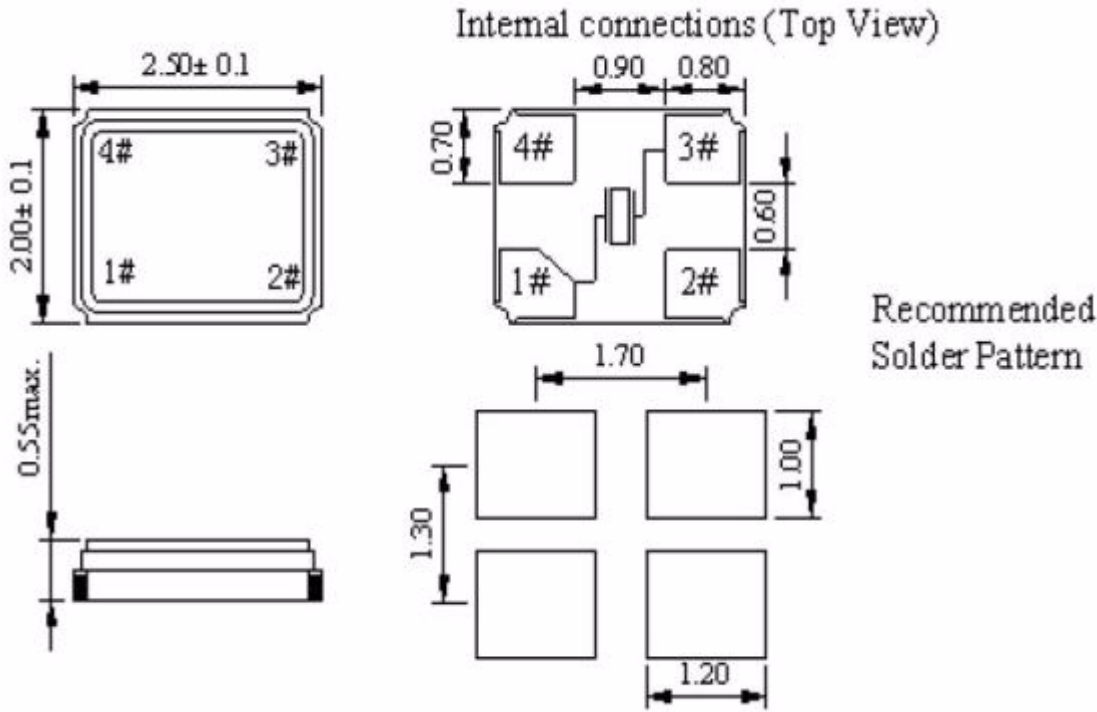

Holder Style	25x2x05 4-pad
Mode	Fundamental
Adjustment Tolerance	± 10 PPM at 25°C
Temperature Stability	± 15 PPM
Operating Temp. Range	-30°C to $+85^{\circ}\text{C}$
Load Capacitance	16 pF
ESR	150 Ohm
Ageing	± 1 ppm
Marking	AEL16

Amdt Date	Change Note	AEL Code
25 MAR 08	Temp Stability, Temp Range and ESR corrected	X16M000000S104
20 OCT 09	Package Outline Corrected	Issue Ref C