



1.0mm Spacing

SERIES


6228

NON-ZIF ライトアングル DIP 上接点

LIF Right Angle Through Hole (Top Contact Type)

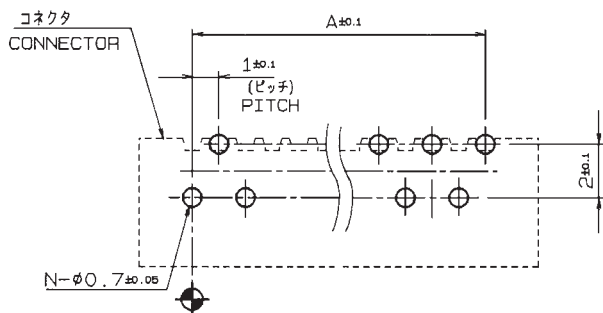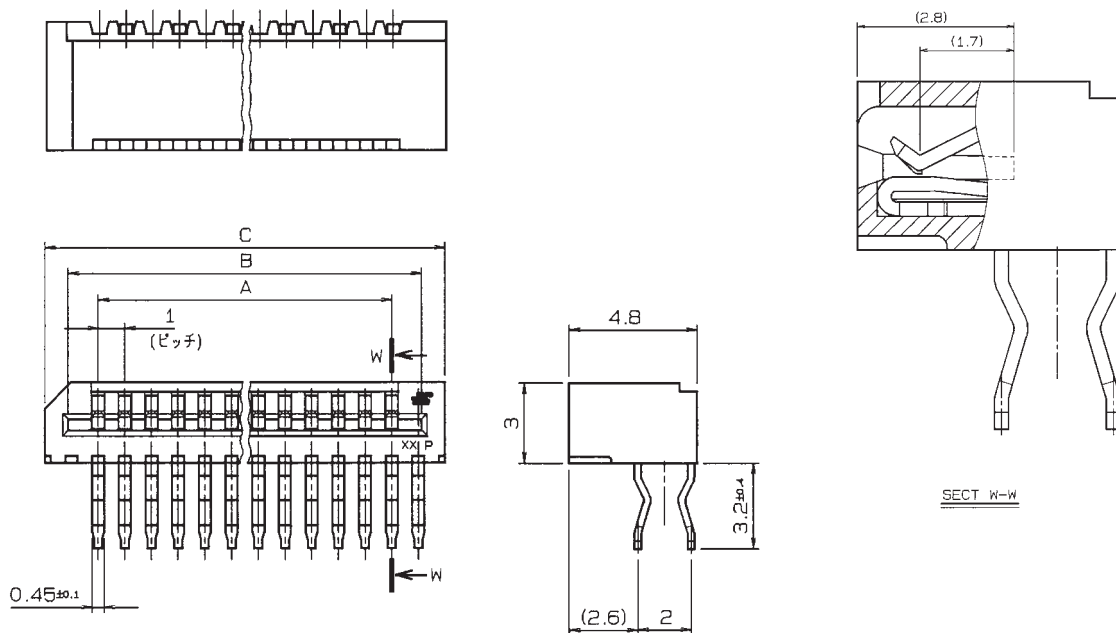

基板取付寸法 (コネクタ搭載側)
MOUNTING LAYOUT
(t=1.6 mm)

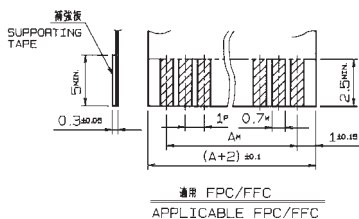

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.1 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

極数 NO. OF POS	型番 ASSEMBLY NUMBER	A	B	C
3	00 6228 003 2X1 800	2.0	4.06	6
4	004	3.0	5.06	7
5	005	4.0	6.06	8
6	006	5.0	7.06	9
7	007	6.0	8.06	10
8	008	7.0	9.06	11
9	009	8.0	10.06	12
10	010	9.0	11.06	13
11	011	10.0	12.06	14
12	012	11.0	13.06	15
13	013	12.0	14.06	16
14	014	13.0	15.06	17
15	015	14.0	16.06	18
16	016	15.0	17.06	19
17	017	16.0	18.06	20
18	018	17.0	19.06	21
19	019	18.0	20.06	22
20	020	19.0	21.06	23
21	021	20.0	22.06	24
22	022	21.0	23.06	25
23	023	22.0	24.06	26
24	024	23.0	25.06	27
25	025	24.0	26.06	28
26	026	25.0	27.06	29
27	027	26.0	28.06	30
28	028	27.0	29.06	31
29	029	28.0	30.06	32
30	00 6228 030 2X1 800	29.0	31.06	33

注文コード ORDERING CODE

00 6228 0XX 2X1 800

00: トレー梱包
TRAY PACKAGE

極数
NUMBER OF
CONTACTS

0=TAIL 3.2mm
2=TAIL 2.5mm