


## IN-LINE RECEPTACLE CRIMP REAR RELEASE

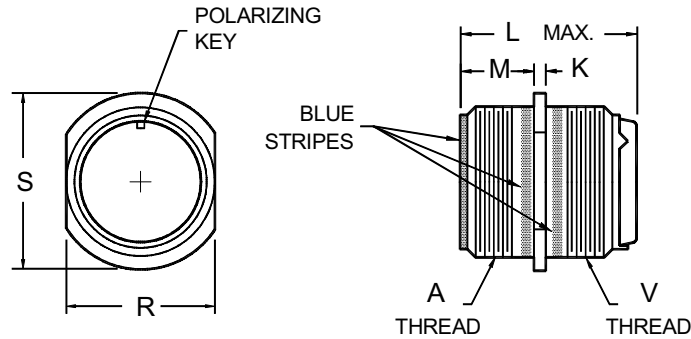

SHELL SIZE	A COUPLING THREAD CLASS 2A	K ±.015 [±0.38]	L MAX.		M +.031 -.000 [+.079] [-0.00]	R		S ±.031 [±0.79]	V ACCESSORY THREAD CLASS 2A
			CONTACT SIZE			MAX.	MIN.		
			16 & 12	8, 4 & 0					
8S	1/2-28 UNEF	.083 [2.11]	2.031 [51.59]	-	.562 [14.27]	.504 [12.80]	.496 [12.60]	.729 [18.52]	1/2-20 UNF
10S	5/8-24 UNEF	.083 [2.11]	2.031 [51.59]	-	.562 [14.27]	.629 [15.98]	.621 [15.77]	.854 [21.69]	5/8-24 UNEF
10SL	5/8-24 UNEF	.083 [2.11]	2.031 [51.59]	-	.562 [14.27]	.629 [15.98]	.621 [15.77]	.854 [21.69]	5/8-24 UNEF
12S	3/4-20 UNEF	.083 [2.11]	2.031 [51.59]	-	.562 [14.27]	.754 [19.15]	.746 [18.95]	.974 [24.74]	3/4-20 UNEF
12	3/4-20 UNEF	.083 [2.11]	2.125 [53.97]	-	.750 [19.05]	.754 [19.15]	.746 [18.95]	.974 [24.74]	3/4-20 UNEF
14S	7/8-20 UNEF	.083 [2.11]	2.031 [51.59]	-	.562 [14.27]	.879 [22.33]	.871 [22.12]	1.099 [27.91]	7/8-20 UNEF
14	7/8-20 UNEF	.083 [2.11]	2.125 [53.97]	-	.750 [19.05]	.879 [22.33]	.871 [22.12]	1.099 [27.91]	7/8-20 UNEF
16S	1-20 UNEF	.083 [2.11]	2.031 [51.59]	-	.562 [14.27]	1.005 [25.53]	.996 [25.30]	1.224 [31.09]	1-20 UNEF
16	1-20 UNEF	.083 [2.11]	2.125 [53.97]	2.500 [63.50]	.750 [19.05]	1.005 [25.53]	.996 [25.30]	1.224 [31.09]	1-20 UNEF
18	1 1/8-18 UNEF	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.750 [19.05]	1.131 [28.73]	1.121 [28.47]	1.349 [34.26]	1 1/16-18 UNEF
20	1 1/4-18 UNEF	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.750 [19.05]	1.256 [31.90]	1.246 [31.65]	1.474 [37.44]	1 3/16-18 UNEF
22	1 3/8-18 UNEF	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.750 [19.05]	1.381 [35.08]	1.371 [34.82]	1.599 [40.61]	1 5/16-18 UNEF
24	1 1/2-18 UNEF	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.812 [20.62]	1.506 [38.25]	1.496 [38.00]	1.715 [43.56]	1 7/16-18 UNEF
28	1 3/4-18 UNS	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.812 [20.62]	1.756 [44.60]	1.746 [44.35]	1.974 [50.14]	1 3/4-18 UNS
32	2-18 UNS	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.875 [22.22]	2.007 [50.98]	1.996 [50.70]	2.224 [56.49]	2-18 UNS
36	2 1/4-16 UN	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.875 [22.22]	2.257 [57.33]	2.246 [57.05]	2.474 [62.84]	2 1/4-16 UN
40	2 1/2-16 UN	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.875 [22.22]	2.511 [63.78]	2.496 [63.40]	2.724 [69.19]	2 1/2-16 UN
44	2 3/4-16 UN	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.875 [22.22]	2.761 [70.13]	2.746 [69.75]	2.974 [75.54]	2 3/4-16 UN
48	3-16 UN	.125 [3.17]	2.125 [53.97]	2.500 [63.50]	.875 [22.22]	3.011 [76.48]	2.996 [76.10]	3.224 [81.89]	3-16 UN

DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

1D054

MIL-DTL-5015 SERIES III CRIMP, REAR RELEASE CONTACTS