



UC3501

Preliminary

CMOS IC


HIGH EFFICIENT, LOW COST FLASHLIGHT LED DRIVE

DESCRIPTION

UTC **UC3501** is Flashlight ASIC chip, Using LSI technology, Specifically designed for single dry battery, Plus 1 of inductors, May constitute a drive circuit for LED flashlights.

FEATURES

- * High efficiency:85%~90%
- * Low cost
- * Simply add-ins one inductor

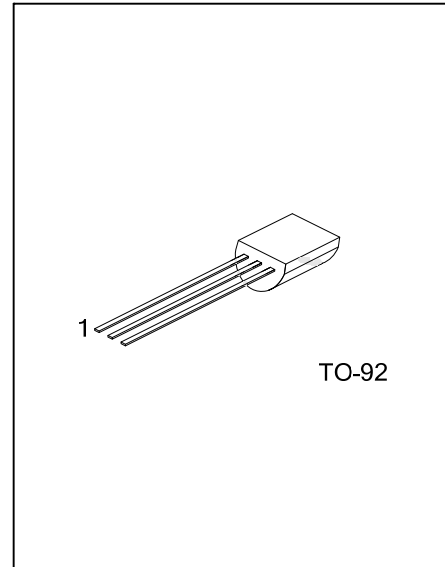

ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UC3501L-T92-B	UC3501G-T92-B	TO-92	O	D	G	Tape Box
UC3501L-T92-K	UC3501G-T92-K	TO-92	O	D	G	Bulk


Note: Pin Assignment: G: GND D: V_{DD} O: OUT

<p>UC3501L-T92-B</p> <p>(1)Packing Type (2)Package Type (3)Lead Free</p>	<p>(1) B: Tape Box, K: Bulk (2) T92: TO-92 (3) L: Lead Free, G: Halogen Free</p>
--	--

MARKING INFORMATION

PACKAGE	MARKING
TO-92	<p>UTC UC3501 □ □ □ □ 1</p> <p>L: Lead Free G: Halogen Free Data Code</p>

■ BLOCK DIAGRAM

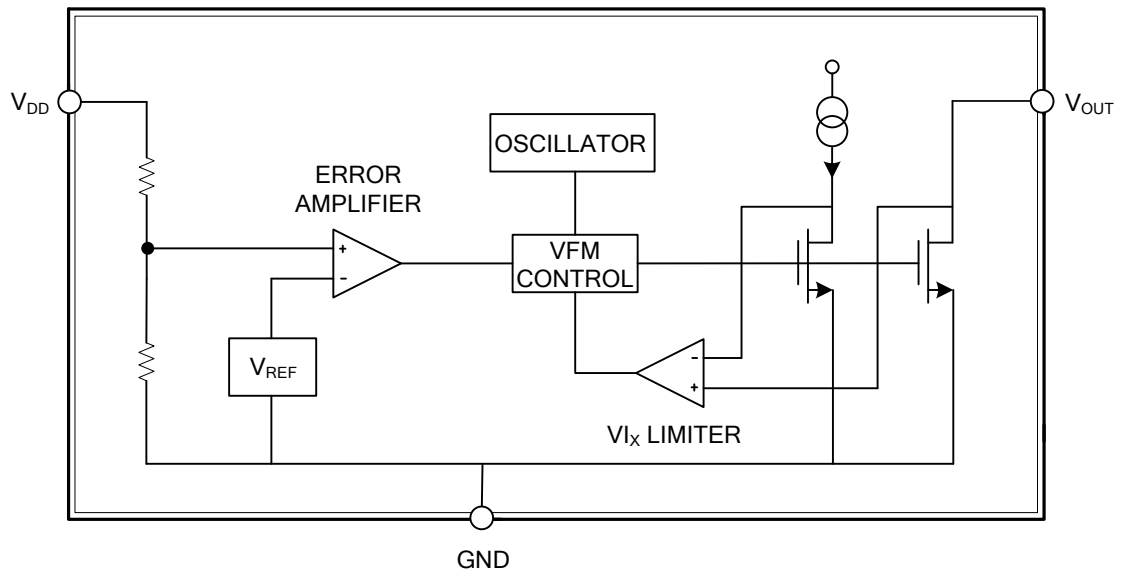

■ ABSOLUTE MAXIMUM RATING


PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	6	V
Output Current	I_{OUT}	150	mA
Operating Junction Temperature	T_J	-40~85	°C
Storage Temperature	T_{STG}	-55~150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
 Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{DD}		0.9		5.0	V
Start Voltage	V_{START}			0.9		V
Output Current	I_{OUT}			100		mA
Oscillator Frequency	F_{OSC}			100		KHz
Efficiency	η			85		%

■ TYPICAL APPLICATION CIRCUIT

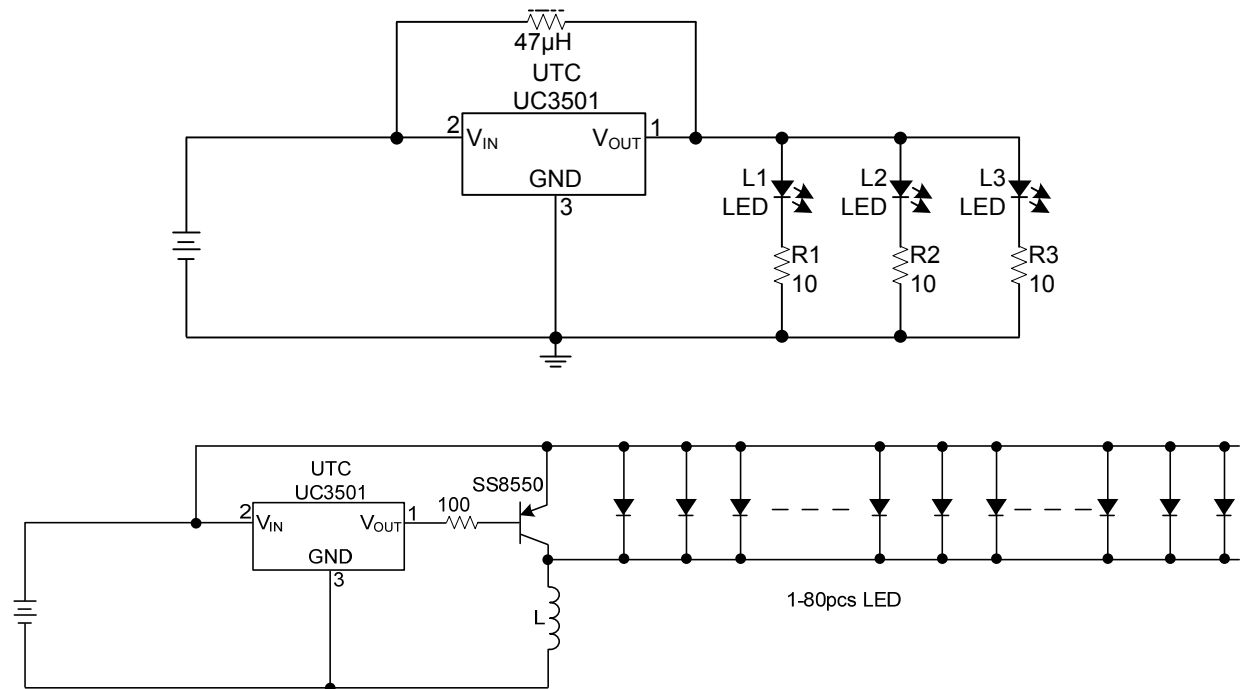

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.