



A

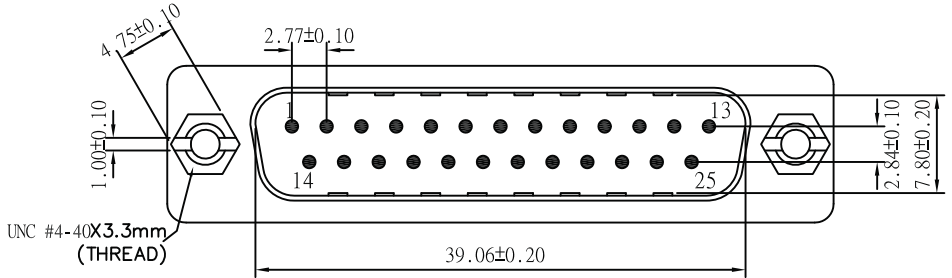


UNC #4-40 Hexscrew



| Pin Out | |
|----------|----------|
| 25P-Male | 25P-Male |
| 1 | 1 |
| 2 | 2 |
| 24 | 24 |
| 25 | 25 |
| G | G |


B

C

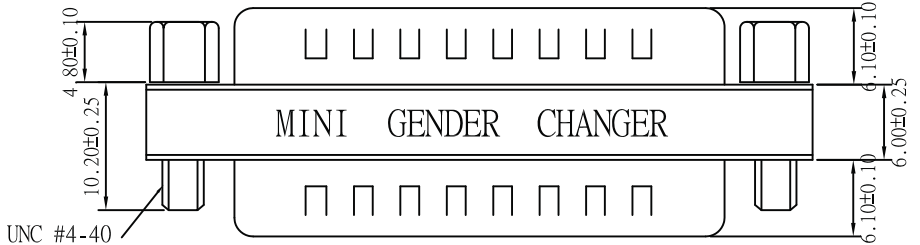

D

E

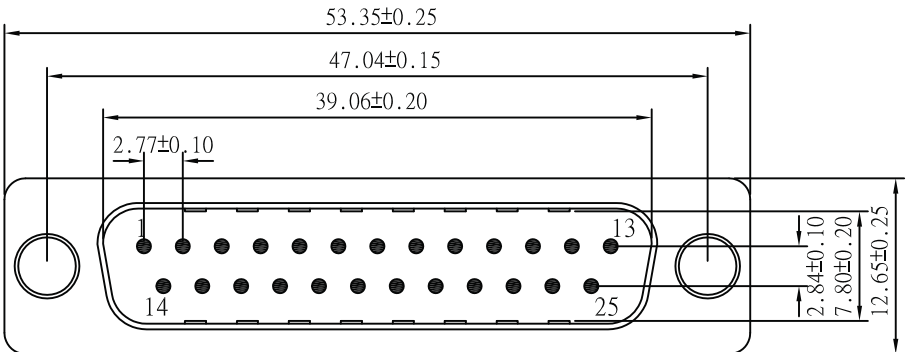

F

Material:

- Insulator: PBT Glass fibre reinforced UL 94 V0
- Contact: Brass
- Contact plating: Gold plated over nickel
- Shell: Tin plated shell
- Yellow label with black characters

Unit: MM

G

| | | | | | | | | |
|-----------|-------|--------------|------|------|--|----------|----------|--|
| Scale | 1:1 | | | | | | Name | Item No. |
| TOLERANCE | | | | | | Drawn | 11.22.11 | AB414-R |
| X.X | ±0.40 | | | | | Approved | | |
| X.XX | ±0.25 | | | | | | | Title |
| X.XXX | ±0.15 | | | | | | | Mini Gender Changer - D-Sub 25 Pin Male <=> D-Sub 25 Pin Male |
| Angle | ±3° | | | | | | | Drawing No. |
| | | | | | | | | Replace |
| | | | | | | | | Sheet |
| | | Modification | Date | Name | | | | |



rev00

H