
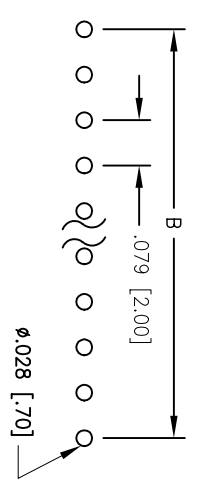

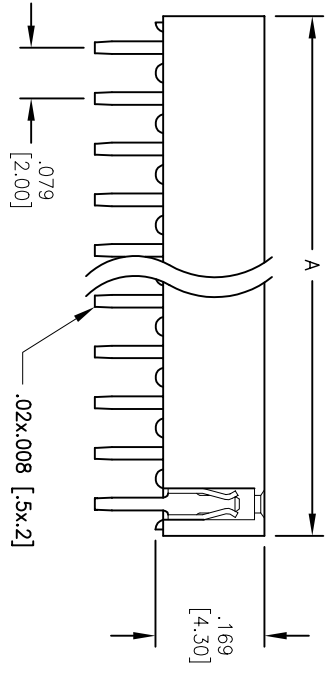


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/04	

APPROVED: _____
 DATE: _____ TITLE: _____

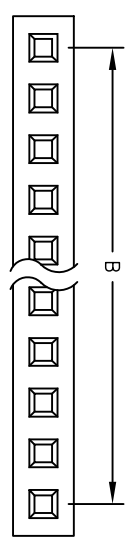

RECOMMENDED PCB LAYOUT

A = .079 [2.00] X No. of Positions
 B = .079 [2.00] X No. of Spaces

SPECIFICATIONS:

- Material: PBT, glass reinforced, rated UL94V-O,
- Insulator Color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall.
- Electrical:
 - Operating Voltage: 250V max.
 - Current rating: 1 Amp
 - Contact resistance: 20 mohms max
 - Insulation resistance: 5000 Mohms min @ 500 V
 - Dielectric withstanding voltage: 1000 V AC for 1 minute
 - Temperature Rating: Operating temperature: -65°C to +125°C

6 5 4 3 2 1

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	± .10
HOLES	± .10
Ø XX	± .015
.XX	± .020
Ø XXX	± .010
.XXX	± .015

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

2.0mm RECEPTACLE STRIP, SINGLE ROW
 STRAIGHT PCB, TIN PLATED

APPROVALS	DATE	TITLE	SIZE	PART NO.	REV.
DRAWN	SS	8/5/04	X	2RS1-XX-T	-
CHECKED					
APPROVED					

SCALE: NTS SHEET 1 OF 1