
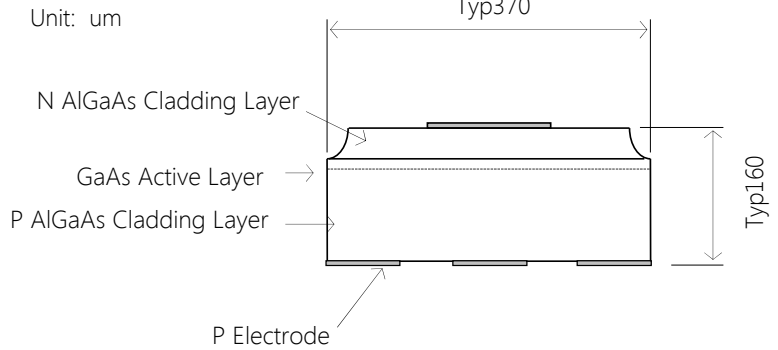


Radiation	Type	Electrodes
Infrared	AlGaAs	N(Cathode)up

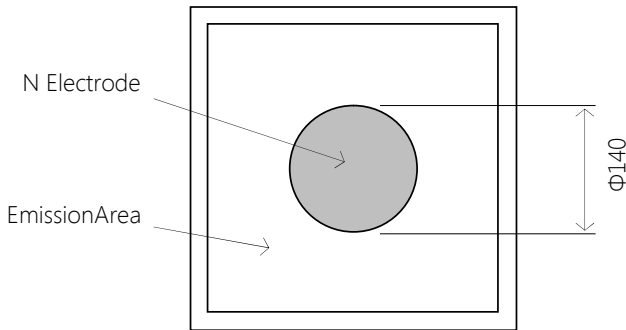

Physical Characteristics & Structure

Material: AlGaAs
 Bond Pad Size: 140um diameter
 Junction Size: 370um x 370um
 Anode Metalization: Gold Alloy
 Thickness: 160um
 Cathode Metalization: Gold Alloy

Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	Vf	If=20mA	--	--	2.0	V
Reverse Voltage	Vr	Ir=10uA	5	--	--	V
Radiant Power*	Φe	If=20mA	2.0	--	--	mW
Peak Wavelength	λp	If=20mA	--	810	--	nm
Spectral Bandwidth	Δλ	If=20mA	--	35	--	nm

* LED chip is mounted on TO-18 gold header without resin coating.

Absolute Maximum Ratings (Ta = 25°C)

Continuous Maximum Forward Current: 50mA (DC)
 Reverse Voltage: 5V (IR=10uA)
 Storage Temperature
 while on mylar membrane: 0 to 40 °C
 after removal from mylar membrane: -30 to 100 °C



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

2014-04-24