

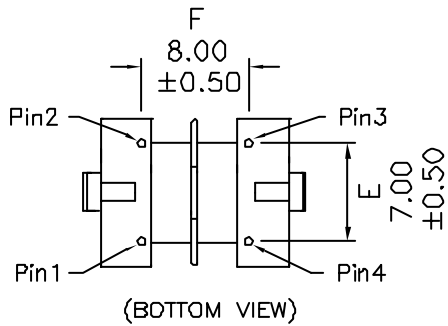
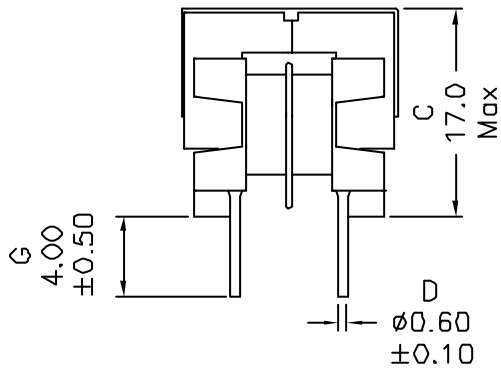


1. Dimensions:

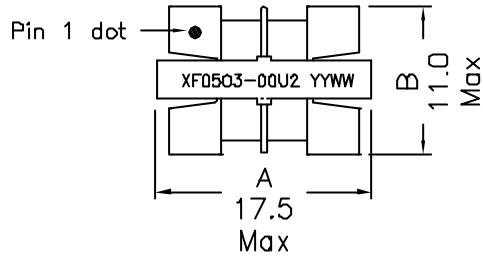

2. Schematic:

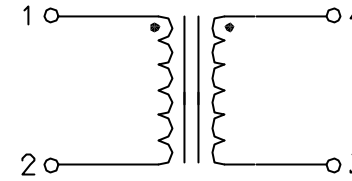

3. Electrical Specifications:

- Turns Ratio: (Pins 1-2) : (Pins 4-3) = 1:1±1%
- OCL: 50mH Min @10KHz 0.1V, Each Wdg
- DCR: 7.50 Ohms Max, Each Wdg
- Isolation: 500Vac Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc www.XFMRS.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0503-00U2	REV. A
	DWN.	Juan Mao	Feb-08-06
	CHK.	YK Liao	Feb-08-06
SHEET 1 OF 1	APP.	Joe Huff	Feb-08-06

DOC, REV: A/2