

Silicon NPN Power Transistors

BD751/751A

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
 $V_{CE0(SUS)} = 90V(\text{Min})$ - BD751
 $= 120V(\text{Min})$ - BD751A
- High Power Dissipation
- Complement to Type BD750/750A

APPLICATIONS



- Designed for high voltage and high power amplifier applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT	
V_{CEV}	Collector-Emitter Voltage	BD751	100	V
		BD751A	130	
$V_{CE0(SUS)}$	Collector-Emitter Voltage	BD751	90	V
		BD751A	120	
V_{EBO}	Emitter-Base Voltage	7	V	
I_C	Collector Current-Continuous	20	A	
I_B	Base Current-Continuous	5	A	
P_C	Collector Power Dissipation@ $T_c=25^\circ\text{C}$	200	W	
T_J	Junction Temperature	200	$^\circ\text{C}$	
T_{stg}	Storage Temperature	-65~200	$^\circ\text{C}$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R_{th-j-c}	Thermal Resistance, Junction to Case	0.875	$^\circ\text{C/W}$

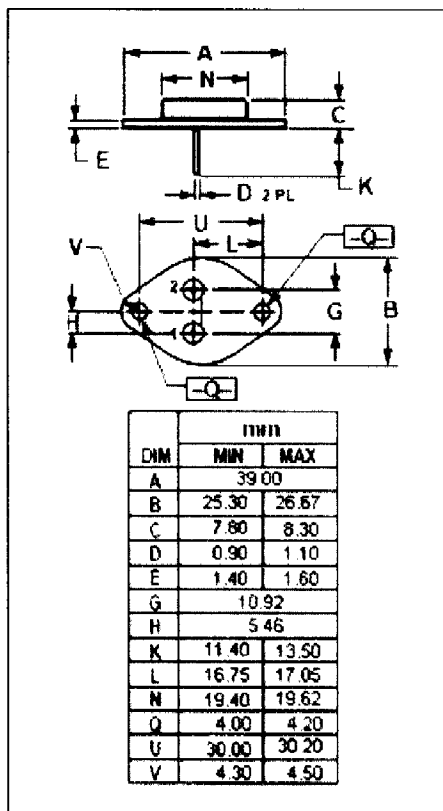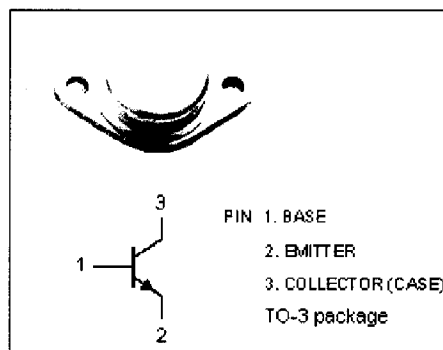

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon NPN Power Transistors

BD751/751A

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	BD751	$I_C=100\text{mA}; I_B=0$			V
		BD751A				
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	BD751	$I_C=7.5\text{A}; I_B=0.75\text{A}$			V
		BD751A	$I_C=5\text{A}; I_B=0.5\text{A}$			
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	BD751	$I_C=7.5\text{A}; I_B=0.75\text{A}$			V
		BD751A	$I_C=5\text{A}; I_B=0.5\text{A}$			
I_{CEV}	Collector Cutoff Current	BD751	$V_{CEV}=100\text{V}; V_{BE(off)}=1.5\text{V}$			mA
		BD751A	$V_{CEV}=130\text{V}; V_{BE(off)}=1.5\text{V}$			
I_{EBO}	Emitter Cutoff Current	$V_{EB}=7\text{V}; I_C=0$			1.0	mA
h_{FE}	DC Current Gain	BD751	$I_C=7.5\text{A}; V_{CE}=2\text{V}$			
		BD751A	$I_C=5\text{A}; V_{CE}=2\text{V}$			
f_T	Current-Gain—Bandwidth Product	$I_C=0.5\text{A}; V_{CE}=10\text{V}; f_{test}=1\text{MHz}$	4			MHz