Thick Film Chip Resistors 0201, 0402, 0603, 0805, 1206, 1210, 1812, 2010, 2512


Type: ERJ 1G, 2G, 3G, 6G, 8G, 14, 12, 12Z, 1T

m m 103

Features


- Small size and lightweight
- High reliability
 Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines
 Taping and bulk case packaging available
- Suitable for both reflow and flow soldering
- Approved under the ISO 9001 system Approved under the QS-9000 system
- Reference Standards IEC 60115-8, JIS C 5201-8, EIAJ RC-2134A

■ Explanation of Part Numbers

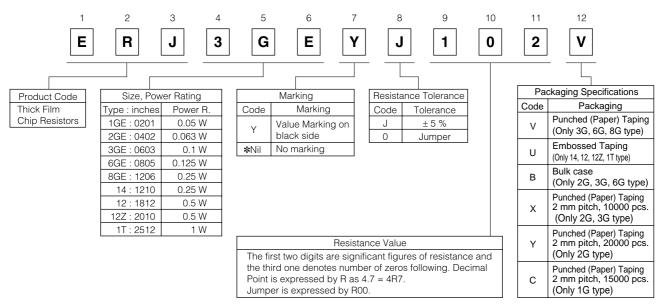


^{*} When partly omitted, all the rest P/N factors should be moved up respectively.

■ Construction

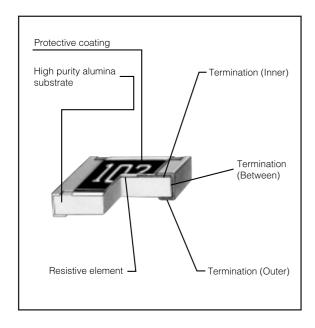

■ Dimensions in mm (not to scale)



| Type | | Weight | | | | |
|------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-------------|
| (inches) | L | W | а | b | t | (1000 pcs.) |
| ERJ1G (0201) | 0.60 ^{±0.03} | 0.30 ^{±0.03} | 0.12 ^{±0.05} | 0.15 ^{±0.05} | 0.25 ^{±0.05} | 0.15 g |
| ERJ2G (0402) | 1.00±0.05 | 0.50±0.05 | 0.20±0.10 | 0.25±0.05 | 0.35±0.05 | 0.8 g |
| ERJ3G (0603) | 1.60 ^{±0.15} | 0.80+0.15 | 0.30 ^{±0.20} | 0.30 ^{±0.15} | 0.45 ^{±0.10} | 2 g |
| ERJ6G (0805) | 2.00±0.20 | 1.25 ^{±0.10} | 0.40 ^{±0.20} | 0.40 ^{±0.20} | 0.60±0.10 | 4 g |
| ERJ8G (1206) | 3.20+0.05 | 1.60+0.05 | 0.50 ^{±0.20} | 0.50 ^{±0.20} | 0.60 ^{±0.10} | 10 g |
| ERJ14 (1210) | 3.20±0.20 | 2.50±0.20 | 0.50±0.20 | 0.50 ^{±0.20} | 0.60±0.10 | 16 g |
| ERJ12 (1812) | 4.50±0.20 | 3.20±0.20 | 0.50±0.20 | 0.50±0.20 | 0.60±0.10 | 27 g |
| ERJ12Z (2010) | 5.00±0.20 | 2.50±0.20 | 0.60±0.20 | 0.60±0.20 | 0.60±0.10 | 27 g |
| ERJ1T (2512) | 6.40±0.20 | 3.20±0.20 | 0.65±0.20 | 0.60±0.20 | 0.60±0.10 | 45 g |

Ratings


| Type (inches) | Power Rating at 70 °C (W) | Limiting Element Voltage (Maximum RCWV) ⁽¹⁾ (V) | Maximum Overload Voltage ⁽²⁾ (V) | Resistance Tolerance(%) | Resistance | Range (Ω) | T.C.R. ×10 ⁻⁶ /°C (ppm/°C) | Standard Resistance Values |
|----------------------------|---------------------------------|--|---|----------------------------|------------|-----------|---|-------------------------------|
| ERJ1G | (, | 110111) (1) | () | | 111111. | παλ. | (66111/ 6) | |
| (0201) | 0.05 | 15 | 30 | ± 5 | 10 | 1 M | <10 Ω: | E24 |
| ERJ2G (0402) | 0.063 | 50 | 100 | ± 5 | 1 | 2.2 M | -100 to +600 | E24 |
| ERJ3G (0603) | 0.1 | 50 | 100 | ± 5 | 1 | 10 M | | E24 |
| ERJ6G (0805) | 0.125 | 150 | 200 | ± 5 | 1 | 10 M | 10 Ω to 1 MΩ: | E24 |
| ERJ8G (1206) | 0.25 | 200 | 400 | ± 5 | 1 | 10 M | ±200 | E24 |
| ERJ14 (1210) | 0.25 | 200 | 400 | ± 5 | 1 | 10 M | | E24 |
| ERJ12, 12Z (1812, 2010) | 0.5 | 200 | 400 | ± 5 | 1 | 10 M | 1 MΩ<: -400 to | E24 |
| ERJ1T (2512) | 1 | 200 | 400 | ± 5 | 1 | 1 M | +150 | E24 |

| | | Rated Current | Maximum Overload Current |
|--------|--------------------|---------------|--------------------------|
| | 1G | 0.5 A | 1 A |
| Jumper | 2G · 3G | 1 A | 2 A |
| | 6G·8G·14·12·12Z·1T | 2 A | 4 A |

⁽¹⁾ Rated Continuous Working Voltage (RCWV) should be determined from RCWV=√Power Rating × Resistance Values, or Limiting Element Voltage (max. RCWV) listed above, whichever is less.

Power Derating Curve

For resistors operating in ambient temperature above 70 °C, power rating should be derated in accordance with the right figure.



⁽²⁾ Overload (Short-time Overload) Test Voltage (SOTV) should be determined from SOTV=2.5 × Power Rating or max. Overload Voltage listed above whichever is less.


■ Packaging Specifications

Standard Quantity

| Type (inches) | Thickness (mm) | Punched (Paper) Taping | Embossed Taping (4 mm pitch) | Bulk Case |
|--------------------------|-------------------|--|---------------------------------|-----------------|
| ERJ1G (0201) | 0.25 | 15000 pcs./reel (2 mm pitch) | | |
| ERJ2G (0402) | 0.35 | 10000 pcs./reel (2 mm pitch) 20000 pcs./reel (2 mm pitch) | | 50000 pcs./case |
| ERJ3G (0603) | 0.45 | 10000 pcs./reel (2 mm pitch) 5000 pcs./reel (4 mm pitch)* | | 25000 pcs./case |
| ERJ6G (0805) | 0.6 | 5000 pcs./reel (4 mm pitch)* | | 10000 pcs./case |
| ERJ8G (1206) | 0.6 | 5000 pcs./reel (4 mm pitch)* | | |
| ERJ14 (1210) | 0.6 | | 5000 pcs./reel | |
| ERJ12,12Z (1812,2010) | 0.6 | | 5000 pcs./reel | |
| ERJ1T (2512) | 0.6 | | 4000 pcs./reel | |

* Please consult us if resistors other than shown above are needed.


Taping Reel

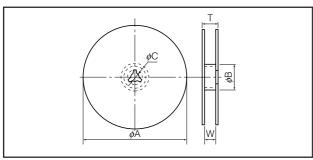


| | Туре | φΑ | φB | φC | W | Т |
|-----------------|----------------------|-----------|---------|----------|----------|----------------------|
| Dimensions (mm) | 1G,2G,3G 6G,8G,14 | 180.0_3.0 | 60 min. | 13.0±1.0 | 9.0±1.0 | 11.4 ^{±2.0} |
| | 12,12Z,1T | | | | 13.0±1.0 | 15.4 ^{±2.0} |

Bulk Case

(mm)

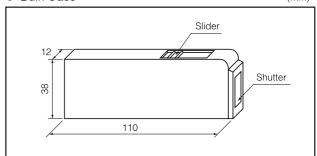


Punched (Paper) Taping

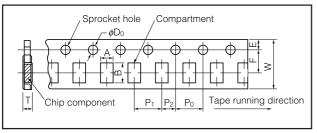

| | Туре | Α | В | W | F | Е |
|-----------------|------------|--------------------------------------|-----------------------|--------------------------|-----------------|---|
| | 1G | 0.38±0.05 | 0.68±0.05 | | | |
| Dimensions | 2G | 0.70 ^{±0.05} | 1.20 ^{±0.05} | | | |
| (mm) | 3G | 1.10 ^{±0.10} | 1.90±0.10 | 8.00 ^{±0.20} | 3.50±0.05 | 1.75 ^{±0.10} |
| () | 6G | 1.65 ^{±0.15} | 2.50±0.20 | | | |
| | 8G | 2.00 ^{±0.15} | 3.60 ^{±0.20} | | | |
| | | | | | | |
| | | | | | | |
| | Туре | P ₁ | P ₂ | P ₀ | ϕD_0 | Т |
| | Type 1G | ' | P ₂ | P _o | φD ₀ | T 0.47 ^{±0.05} |
| Dimensions | 1G | P ₁ 2.00 ^{±0.10} | P ₂ | Po | φD ₀ | T 0.47 ^{±0.05} 0.52 ^{±0.05} |
| Dimensions (mm) | 1G | ' | P ₂ | P ₀ 4.00±0.10 | φD ₀ | |
| | 1G 2G | ' | | | , | 0.52 ^{±0.05} |

Embossed Taping

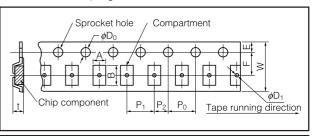


| | Туре | Α | В | W | F | Е | P ₁ |
|------------|------|-----------------------|-----------------------|-----------------------|-----------|--------------------|-----------------------|
| | 14 | 2.80±0.20 | 3.50 ^{±0.20} | 8.00 ^{±0.30} | 3.50±0.05 | | |
| Dimensions | 12 | 3.50±0.20 | 4.80±0.20 | | | 4 7 5 10 10 | 4.00+0.10 |
| (mm) | 12Z | 2.80±0.20 | 5.30±0.20 | 12.00±0.30 | 5.50±0.05 | 1.75 | 4.00 ^{±0.10} |
| | 1T | 3.60 ^{±0.20} | 6.90 ^{±0.20} | | | | |

| | Туре | P ₂ | P ₀ | ϕD_0 | t | ϕD_1 |
|--------------------|------|----------------|----------------|------------|-----------------------|------------|
| Dimensions (mm) | 14 | 2.00±0.05 | 4.00±0.10 | 1.50+0.10 | 1.00 ^{±0.10} | 1 min. |
| | 12 | | | | | |
| | 12Z | | | | | 1.5 min. |
| | 1T | | | | | |

■ Recommended Land Pattern

In case of flow soldering, the land width must be smaller than the Chip Resistor width to control the solder amount properly. Generally, the land width should be 0.7 to 0.8 times the width of chip the resistor. In case of reflow soldering, solder amount can be adjusted, therefore the land width should be set to 1.0 to 1.3 times chip resistor width (W).

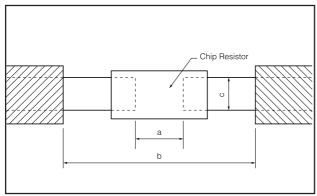


| Туре | Dimensions (mm) | | | | | |
|--------------|-----------------|------------|--------------|--|--|--|
| (inches) | а | b | С | | | |
| ERJ1G(0201) | 0.3 to 0.4 | 0.8 to 0.9 | 0.25 to 0.35 | | | |
| ERJ2G(0402) | 0.5 to 0.6 | 1.4 to 1.6 | 0.4 to 0.6 | | | |
| ERJ3G(0603) | 0.7 to 0.9 | 2 to 2.2 | 0.8 to 1 | | | |
| ERJ6G(0805) | 1 to 1.4 | 3.2 to 3.8 | 0.9 to 1.4 | | | |
| ERJ8G(1206) | 2 to 2.4 | 4.4 to 5 | 1.2 to 1.8 | | | |
| ERJ14(1210) | 2 to 2.4 | 4.4 to 5 | 1.8 to 2.8 | | | |
| ERJ12(1812) | 3.3 to 3.7 | 5.7 to 6.5 | 2.3 to 3.5 | | | |
| ERJ12Z(2010) | 3.6 to 4 | 6.2 to 7 | 1.8 to 2.8 | | | |
| ERJ1T(2512) | 5 to 5.4 | 7.6 to 8.6 | 2.3 to 3.5 | | | |

■ Recommended Soldering Conditions

Recommendations and precautions are described below.

- Recommended soldering conditions for reflow
- ·Reflow soldering should be a maximum of two times
- Please contact us for additional information when used in conditions other than those specified.
- Please measure the temperature of terminations and study every type of printed circuit board for solderability, before actual use.

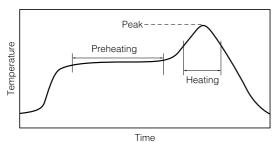

For soldering (Example: Sn/Pb)

| | Temperature | Time |
|--------------|------------------|---------------|
| Preheating | 140 °C to 160 °C | 60 s to 120 s |
| Main heating | Above 200 °C | 30 s to 40 s |
| Peak | 235 ± 5 °C | max. 10 s |

For lead-free soldering (Example : Sn/Ag/Cu)

| r or road mod deracting (Example r on, rig, od) | | | | | |
|---|---|--|--|--|--|
| Temperature | Time | | | | |
| 150 °C to 180 °C | 60 s to 120 s | | | | |
| Above 230 °C | 30 s to 40 s | | | | |
| max. 260 °C | max. 10 s | | | | |
| | Temperature 150 °C to 180 °C Above 230 °C | | | | |

Recommended soldering conditions for flow

| | For | soldering | For lead-free soldering | |
|------------|------------------|---------------|-------------------------|---------------|
| | Temperature | Time | Temperature | Time |
| Preheating | 140 °C to 160 °C | 60 s to 120 s | 150 °C to 180 °C | 60 s to 120 s |
| Soldering | 245±5 °C | 20 s to 30 s | max. 260 °C | max. 10 s |

- 1. If transient load (heavy load in a short time) like pulse is to be applied, carry out an evaluation and confirmation test with the resistors actually mounted on the board.
 - When a load of more than the rated power is applied under load condition at steady state, it may impair performance and/or reliability of the resistor.
 - Never exceed the specified rated power.
- 2. Chlorine type or other highly-reactive flux is not recommended. Residue could affect performance or reliability of the resistors.
- 3. When using a soldering iron, never let the tip of the iron touch the body of the chip resistor. When using a soldering iron with a tip at a high temperature, solder for as short time as possible (no more than three seconds and up to 350 °C).
- 4. Avoid physical shock to the resistor and nipping of the resistor with hard tool (pliers or tweezers) as it may damage the protective coating of the resistor and may affect its performance.