Preferred Device

Programmable Unijunction Transistor

Programmable Unijunction Transistor Triggers

Designed to enable the engineer to "program" unijunction characteristics such as R_{BB} , η , I_V , and I_P by merely selecting two resistor values. Application includes thyristor-trigger, oscillator, pulse and timing circuits. These devices may also be used in special thyristor applications due to the availability of an anode gate. Supplied in an inexpensive TO-92 plastic package for high-volume requirements, this package is readily adaptable for use in automatic insertion equipment.

- Programmable R_{BB} , η , IV and IP
- Low On–State Voltage 1.5 Volts Maximum @ $I_F = 50 \text{ mA}$
- Low Gate to Anode Leakage Current 10 nA Maximum
- High Peak Output Voltage 11 Volts Typical
- Low Offset Voltage 0.35 Volt Typical ($R_G = 10 \text{ k ohms}$)
- Device Marking: Logo, Device Type, e.g., 2N6027, Date Code

MAXIMUM RATINGS ($T_J = 25^{\circ}C$ unless otherwise noted)

Rating	Symbol	Value	Unit
*Power Dissipation Derate Above 25°C	Рғ 1/θ _{ЈА}	300 4.0	mW mW/°C
*DC Forward Anode Current Derate Above 25°C	ΙŢ	150 2.67	mA mA/°C
*DC Gate Current	IG	±50	mA
Repetitive Peak Forward Current 100 μs Pulse Width, 1% Duty Cycle *20 μs Pulse Width, 1% Duty Cycle	ITRM	1.0 2.0	Amps
Non–Repetitive Peak Forward Current 10 μs Pulse Width	ITSM	5.0	Amps
*Gate to Cathode Forward Voltage	VGKF	40	Volts
*Gate to Cathode Reverse Voltage	VGKR	-5.0	Volts
*Gate to Anode Reverse Voltage	VGAR	40	Volts
*Anode to Cathode Voltage(1)	VAK	±40	Volts
Operating Junction Temperature Range	Tj	–50 to +100	°C
*Storage Temperature Range	T _{stg}	–55 to +150	°C



ON Semiconductor

http://onsemi.com

PUTs 40 VOLTS 300 mW





TO-92 (TO-226AA) CASE 029 STYLE 16

PIN ASSIGNMENT				
1 Anode				
2	Gate			
3	Cathode			

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

*Indicates JEDEC Registered Data

(1) Anode positive, R_{GA} = 1000 ohms Anode negative, R_{GA} = open

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{ extsf{ heta}JC}$	75	°C/W
Thermal Resistance, Junction to Ambient	R _{θJA}	200	°C/W
Maximum Lead Temperature for Soldering Purposes (<1/16" from case, 10 secs max)	ΤL	260	°C


ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Fig. No.	Symbol	Min	Тур	Max	Unit	
*Peak Current (V _S = 10 Vdc, R _G = 1 MΩ) (V _S = 10 Vdc, R _G = 10 k ohms)	2N6027 2N6028 2N6027 2N6028	2,9,11	ΙP	 	1.25 0.08 4.0 0.70	2.0 0.15 5.0 1.0	μΑ
*Offset Voltage (V _S = 10 Vdc, R _G = 1 M Ω) (V _S = 10 Vdc, R _G = 10 k ohms)	2N6027 2N6028 (Both Types)	1	VT	0.2 0.2 0.2	0.70 0.50 0.35	1.6 0.6 0.6	Volts
*Valley Current (V _S = 10 Vdc, R _G = 1 MΩ) (V _S = 10 Vdc, R _G = 10 k ohms) (V _S = 10 Vdc, R _G = 200 ohms)	2N6027 2N6028 2N6027 2N6028 2N6027 2N6028	1,4,5	IV	 70 25 1.5 1.0	18 18 150 150 —	50 25 — — —	μA mA
*Gate to Anode Leakage Current (V _S = 40 Vdc, $T_A = 25^{\circ}$ C, Cathode Open) (V _S = 40 Vdc, $T_A = 75^{\circ}$ C, Cathode Open)		-	IGAO		1.0 3.0	10 —	nAdc
Gate to Cathode Leakage Current (V _S = 40 Vdc, Anode to Cathode Shorted)		-	IGKS	—	5.0	50	nAdc
*Forward Voltage (I _F = 50 mA Peak) ⁽¹⁾		1,6	VF	—	0.8	1.5	Volts
*Peak Output Voltage (V _G = 20 Vdc, C _C = 0.2 μF)		3,7	Vo	6.0	11	—	Volt
Pulse Voltage Rise Time (V _B = 20 Vdc, C _C = 0.2 μ F)		3	t _r	—	40	80	ns

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width \leq 300 $\mu sec,$ Duty Cycle \leq 2%.

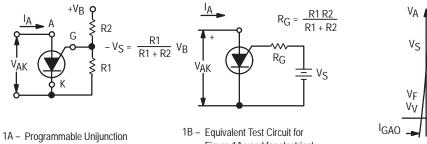



 A – Programmable Unijunction with "Program" Resistors R1 and R2

 Equivalent Test Circuit for Figure 1A used for electrical characteristics testing (also see Figure 2)



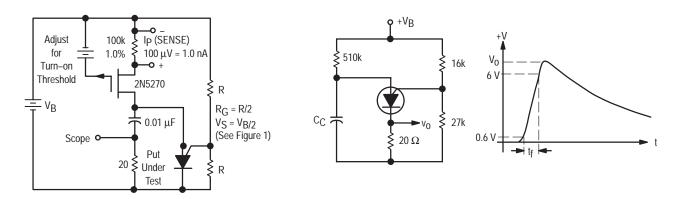


Figure 2. Peak Current (Ip) Test Circuit

Figure 3. $V_{\mbox{O}}$ and $t_{\mbox{r}}$ Test Circuit

TYPICAL VALLEY CURRENT BEHAVIOR

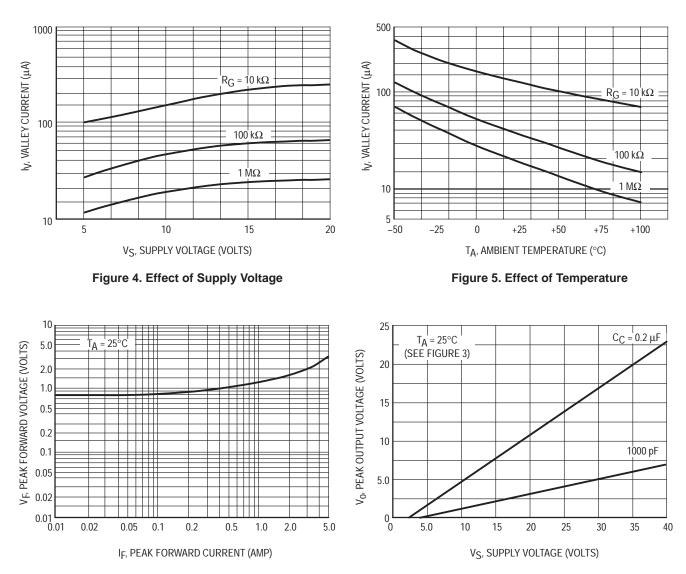





Figure 6. Forward Voltage











Figure 8. Programmable Unijunction

o

۶


G

TYPICAL PEAK CURRENT BEHAVIOR

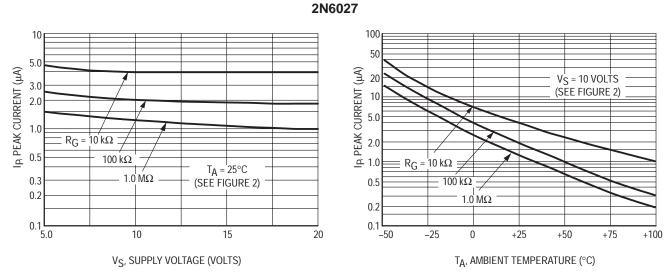





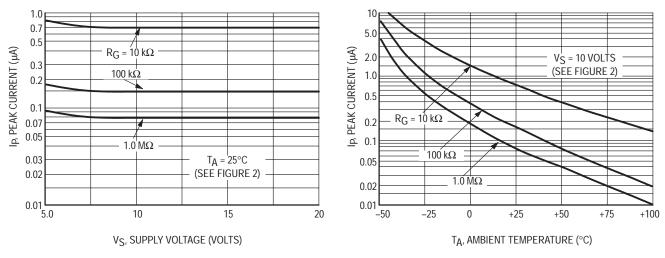

2N6028

Figure 11. Effect of Supply Voltage and RG



TO-92 EIA RADIAL TAPE IN FAN FOLD BOX OR ON REEL

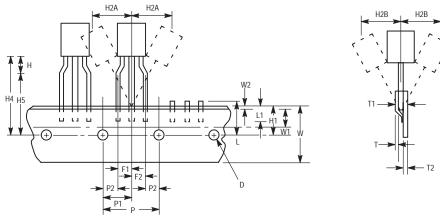


Figure 13. Device Positioning on Tape

		Specification			
		Inches		Millimeter	
Symbol	Item	Min	Мах	Min	Max
D	Tape Feedhole Diameter	0.1496	0.1653	3.8	4.2
D2	Component Lead Thickness Dimension	0.015	0.020	0.38	0.51
F1, F2	Component Lead Pitch	0.0945	0.110	2.4	2.8
Н	Bottom of Component to Seating Plane	.059	.156	1.5	4.0
H1	Feedhole Location	0.3346	0.3741	8.5	9.5
H2A	Deflection Left or Right	0	0.039	0	1.0
H2B	Deflection Front or Rear	0	0.051	0	1.0
H4	Feedhole to Bottom of Component	0.7086	0.768	18	19.5
H5	Feedhole to Seating Plane	0.610	0.649	15.5	16.5
L	Defective Unit Clipped Dimension	0.3346	0.433	8.5	11
L1	Lead Wire Enclosure	0.09842	—	2.5	—
Р	Feedhole Pitch	0.4921	0.5079	12.5	12.9
P1	Feedhole Center to Center Lead	0.2342	0.2658	5.95	6.75
P2	First Lead Spacing Dimension	0.1397	0.1556	3.55	3.95
Т	Adhesive Tape Thickness	0.06	0.08	0.15	0.20
T1	Overall Taped Package Thickness	—	0.0567	—	1.44
T2	Carrier Strip Thickness	0.014	0.027	0.35	0.65
W	Carrier Strip Width	0.6889	0.7481	17.5	19
W1	Adhesive Tape Width	0.2165	0.2841	5.5	6.3
W2	Adhesive Tape Position	.0059	0.01968	.15	0.5

NOTES:

1. Maximum alignment deviation between leads not to be greater than 0.2 mm.

2. Defective components shall be clipped from the carrier tape such that the remaining protrusion (L) does not exceed a maximum of 11 mm.

3. Component lead to tape adhesion must meet the pull test requirements.

4. Maximum non-cumulative variation between tape feed holes shall not exceed 1 mm in 20 pitches.

5. Holddown tape not to extend beyond the edge(s) of carrier tape and there shall be no exposure of adhesive.

6. No more than 1 consecutive missing component is permitted.


7. A tape trailer and leader, having at least three feed holes is required before the first and after the last component.


8. Splices will not interfere with the sprocket feed holes.

ORDERING & SHIPPING INFORMATION: 2N6027 and 2N6028 packaging options, Device Suffix

U.S.	Europe Equivalent	Shipping	Description of TO92 Tape Orientation
2N6027, 2N6028 2N6027, 2N6028RLRA 2N6028RLRM 2N6028RLRP	2N6027RL1	Bulk in Box (5K/Box) Radial Tape and Reel (2K/Reel) Radial Tape and Reel (2K/Reel) Radial Tape and Fan Fold Box (2K/Box) Radial Tape and Fan Fold Box (2K/Box)	N/A, Bulk Round side of TO92 and adhesive tape visible Flat side of TO92 and adhesive tape visible Flat side of TO92 and adhesive tape visible Round side of TO92 and adhesive tape visible

PACKAGE DIMENSIONS





D

SECTION X-X

TO-92 (TO-226AA)

NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED. 4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INC	HES	MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.175	0.205	4.45	5.20
В	0.170	0.210	4.32	5.33
С	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
Н	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
К	0.500		12.70	
L	0.250		6.35	
Ν	0.080	0.105	2.04	2.66
Р		0.100		2.54
R	0.115		2.93	
٧	0.135		3.43	



STYLE 16: PIN 1. ANODE 2. GATE 3. CATHODE

ON Semiconductor and without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or special; consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or special; consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or special; consequential or purpose, nor does Active application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: ONlit@hibbertco.com Fax Response Line: 303–675–2167 or 800–344–3810 Toll Free USA/Canada

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor – European Support German Phone: (+1) 303–308–7140 (M–F 1:00pm to 5:00pm Munich Time)

Email: ONlit-german@hibbertco.com

- French Phone: (+1) 303–308–7141 (M–F 1:00pm to 5:00pm Toulouse Time) Email: ONlit-french@hibbertco.com
- English Phone: (+1) 303–308–7142 (M–F 12:00pm to 5:00pm UK Time) Email: ONlit@hibbertco.com

EUROPEAN TOLL-FREE ACCESS*: 00-800-4422-3781 *Available from Germany, France, Italy, England, Ireland

CENTRAL/SOUTH AMERICA:

Spanish Phone: 303–308–7143 (Mon–Fri 8:00am to 5:00pm MST) Email: ONlit–spanish@hibbertco.com

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support Phone: 303–675–2121 (Tue–Fri 9:00am to 1:00pm, Hong Kong Time) Toll Free from Hong Kong & Singapore: 001–800–4422–3781 Email: ONlit–asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center 4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–8549 Phone: 81–3–5740–2745 Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local Sales Representative.