# BT137B series D

## GENERAL DESCRIPTION

Glass passivated, sensitive gate triacs in a plastic envelope suitable for surface mounting, intended for use in general purpose bidirectional switching and phase control applications. These devices are intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.

DESCRIPTION

main terminal 1

main terminal 2

main terminal 2

# QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	MAX.	UNIT
V <sub>drm</sub> I <sub>t(rms)</sub> I <sub>tsm</sub>	BT137B- Repetitive peak off-state voltages RMS on-state current Non-repetitive peak on-state current	<b>500D</b> 500 8 65	<b>600D</b> 600 8 65	V A A

# PIN CONFIGURATION

-D-


2

3

1

-

#### SYMBOL



#### LIMITING VALUES

gate

**PINNING - SOT404** 

PIN

1

2

3

mb

Limiting values in accordance with the Absolute Maximum System (IEC 134).

peak ful nt su	ıll sine wave; T <sub>mb</sub> ≤ 102 ıll sine wave; T <sub>i</sub> = 25 °C	2 °C	-	<b>-500</b> 500 <sup>1</sup>	<b>-600</b> 600 <sup>1</sup>	V
peak ful nt su	ull sine wave; T <sub>mb</sub> ≤ 102 וון sine wave: T₁ = 25 °נ	2 °C	_			
I + _	urge <sup>'</sup>	C prior to	-		3	A
	= 20 ms		-	6 7	5	A
	= 16.7 ms = 10 ms		-	2	1 1	A A <sup>2</sup> s
of rise of $I_{TN}$	<sub>M</sub> = 12 A; I <sub>G</sub> = 0.2 A; I <sub>G</sub> /dt = 0.2 A/μs			_		
		T2+ G+	-		0	A/μs
		T2+ G- T2- G-	-		0 0	A/μs A/μs
		-	_			A/μs A/μs
ent age			-			Á V
oower ov erature	ver any 20 ms period		- - -40 -	0 15	.5 50	°℃ ℃ ℃
	age ver power o	age ver bower over any 20 ms period vrature	T2- G+ age ver bower over any 20 ms period rature	T2- G+ - 	ent - 1   age - -   ver - -   oower over any 20 ms period - 0   rature -40 1	T2-G+ - 10   age - 2   ver - 5   oower over any 20 ms period - 0.5   vrature -40 150

**<sup>1</sup>** Although not recommended, off-state voltages up to 800V may be applied without damage, but the triac may switch to the on-state. The rate of rise of current should not exceed 6 A/μs.

# BT137B series D

#### THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
R <sub>th j-mb</sub> R <sub>th j-a</sub>	Thermal resistance junction to mounting base Thermal resistance junction to ambient	full cycle half cycle minimum footprint, FR4 board	- -	- - 55	2.0 2.4 -	K/W K/W K/W

# STATIC CHARACTERISTICS

 $T_i = 25$  °C unless otherwise stated


SYMBOL	PARAMETER	CONDITIONS		MIN.	TYP.	MAX.	UNIT
I <sub>GT</sub>	Gate trigger current	$V_{\rm D} = 12 \text{ V}; I_{\rm T} = 0.1 \text{ A}$					
01			T2+ G+	-	2.5	5	mA
			T2+ G-	-	3.5	5 5	mA
			T2- G-	-	3.5	5	mA
			T2- G+	-	6.5	10	mA
I <sub>L</sub>	Latching current	$V_{\rm D} = 12 \text{ V}; I_{\rm GT} = 0.1 \text{ A}$					
-			T2+ G+	-	1.6	15	mA
			T2+ G-	-	8.5	20	mA
			T2- G-	-	1.2	15	mA
			T2- G+	-	2.5	20	mA
I <sub>H</sub>	Holding current	$V_{\rm D} = 12 \text{ V}; I_{\rm GT} = 0.1 \text{ A}$		-	1.5	10	mA
ν <sub>τ</sub>	On-state voltage	$I_{T} = 10 \text{ A}$		-	1.3	1.65	V
I <sub>H</sub> V <sub>T</sub> V <sub>GT</sub>	Gate trigger voltage	$\dot{V}_{\rm D} = 12 \text{ V}; \text{ I}_{\rm T} = 0.1 \text{ A}$		-	0.7	1.5	V
		$V_{\rm D} = 400 \text{ V}; I_{\rm T} = 0.1 \text{ A}; T_{\rm i} = 125^{\circ}$	C	0.25	0.4	-	V
I <sub>D</sub>	Off-state leakage current	$V_{D}^{J} = 400 \text{ V}; I_{T} = 0.1 \text{ A}; T_{j} = 125 ^{\circ}$ $V_{D} = V_{DRM(max)}; T_{j} = 125 ^{\circ}C$		-	0.1	0.5	mA


#### **DYNAMIC CHARACTERISTICS**


 $T_i = 25$  °C unless otherwise stated


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
dV <sub>D</sub> /dt		$V_{DM} = 67\% V_{DRM(max)}; T_j = 125 °C;$	-	5	-	V/µs
t <sub>gt</sub>	off-state voltage Gate controlled turn-on time	exponential waveform; $R_{GK} = 1 k\Omega$ $I_{TM} = 12 A$ ; $V_D = V_{DRM(max)}$ ; $I_G = 0.1 A$ ; $dI_G/dt = 5 A/\mu s$	-	2	-	μs


# BT137B series D


















Fig.5. Maximum permissible repetitive rms on-state current  $I_{T(RMS)}$ , versus surge duration, for sinusoidal currents, f = 50 Hz;  $T_{mb} \le 102$ °C.

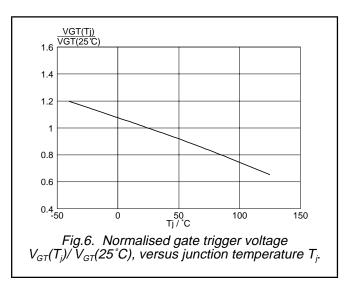


# BT137B series D

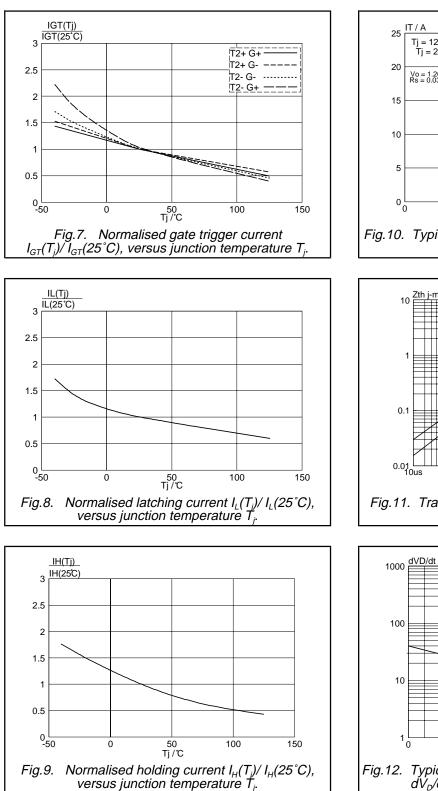








# BT137B series D


# **MECHANICAL DATA**

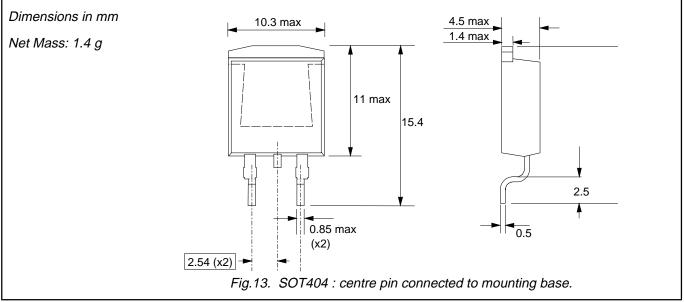

#### Notes

1. Epoxy meets UL94 V0 at 1/8".

# **MOUNTING INSTRUCTIONS**

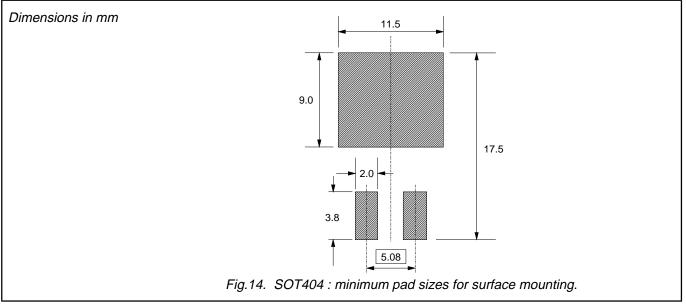

#### Notes

1. Plastic meets UL94 V0 at 1/8".

Triacs	BT137B series D
logic level	

#### DEFINITIONS

Data sheet status					
Objective specification This data sheet contains target or goal specifications for product development.					
Preliminary specification This data sheet contains preliminary data; supplementary data may be published later.					
Product specification	Product specification This data sheet contains final product specifications.				
Limiting values					
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.					
Application information					
Where application information is given, it is advisory and does not form part of the specification.					

© Philips Electronics N.V. 1997

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

#### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.