#### TOSHIBA PHOTOCOUPLER PHOTO RELAY

### **TLP597A**

# TELECOMMUNICATION DATA ACQUISITION MEASUREMENT INSTRUMENTATION

The TOSHIBA TLP597A consists of an aluminum gallium arsenide infrared emitting diode optically coupled to a photo-MOS FET in a six lead plastic DIP package (DIP6).

The TLP597A is a bi-directional switch can replace mechanical relays in many applications.

#### **FEATURES**


• 6 pin DIP (DIP6)

• 1-Form-A

 $\begin{array}{lll} \bullet & \operatorname{Peak\ Off\text{-}State\ Voltage} & :\ 60\ V\ (\operatorname{MIN.}) \\ \bullet & \operatorname{Trigger\ LED\ Current} & :\ 3\ \operatorname{mA\ (MAX.}) \\ \bullet & \operatorname{On-State\ Current} & :\ 500\ \operatorname{mA\ (MAX.}) \\ \bullet & \operatorname{On-State\ Resistance} & :\ 2\ \Omega\ (\operatorname{MAX.}) \\ \bullet & \operatorname{Isolation\ Voltage} & :\ 2500\ \operatorname{Vrms\ (MIN.}) \\ \end{array}$ 

• UL Recognized : UL1577, File No. E67349


### PIN CONFIGURATION (TOL VIEW)

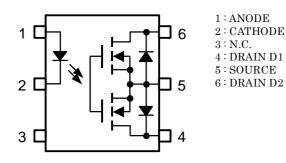

## 

Weight: 0.4 g

#### **SCHEMATIC**

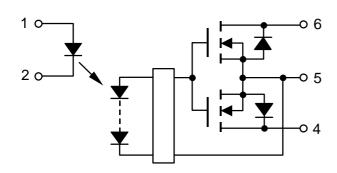

#### MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC			SYMBOL	RATING	UNIT	
	Forward Current	l <sub>F</sub>	50	mA		
	Forward Current Derating (Ta	ΔI <sub>F</sub> /°C	-0.5	mA/°C		
LED	Peak Forward Current (100 µ	s pulse, 100 pps)	I <sub>FP</sub>	1	А	
	Reverse Voltage		V <sub>R</sub>	5	V	
	Junction Temperature		Tj	125	°C	
	Off-State Output Terminal Vo	ltage	V <sub>OFF</sub>	60	V	
	On-State RMS Current	A Connection		500		
<u>~</u>		B Connection	I <sub>ON</sub>	500	mA	
СТО		C Connection		1000		
DETECTOR	On-State Current Derating (Ta ≧ 25°C)	A Connection		-5.0		
		B Connection	Δl <sub>ON</sub> /°C	-5.0	mA/°C	
	(1a ≤ 25 C)	C Connection		-10.0		
	Junction Temperature	•	Tj	125	°C	
Operating Temperature Range			T <sub>opr</sub>	-40~85	°C	
Storage Temperature Range			T <sub>stg</sub>	-55~125	°C	
Lead	Soldering Temperature (10 s)	T <sub>sol</sub>	260	°C		
Isolation Voltage (AC, 1 minute, R.H. ≦ 60%) (NOTE1)			BVS	2500	Vrms	

(NOTE1) :Device considered a two-terminal device : Pins 1, 2 and 3 shorted together, and pins 4, 5 and 6 shorted together.

#### **RECOMMENDED OPERATING CONDITIONS**

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	$V_{DD}$		_	48	V
Forward Current	I <sub>F</sub>	5	7.5	25	mA
On-State Current	I <sub>ON</sub>	_	_	400	mA
Operating Temperature	T <sub>opr</sub>	-20	—	65	°C

#### **CIRCUIT CONNECTIONS**

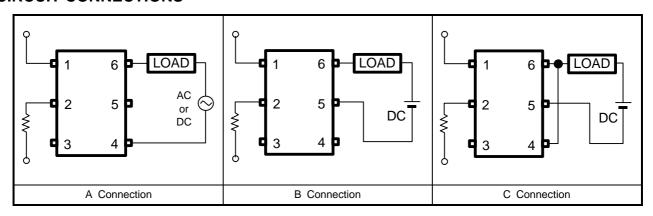

#### INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
	Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	1.0	1.15	1.3	V
LED	Reverse Current	I <sub>R</sub>	V <sub>R</sub> = 5 V			10	μΑ
	Capacitance	C <sub>T</sub>	V = 0, f = 1 MHz	_	30	_	pF
CTOR	Off-State Current	l <sub>OFF</sub>	V <sub>OFF</sub> = 60 V			1	μА
DETECTOR	Capacitance	C <sub>OFF</sub>	V = 0, f = 1 MHz	_	130	_	pF

#### **COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)**

CHARA	ACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Cu	rrent	I <sub>FT</sub>	I <sub>ON</sub> = 500 mA	_	_	3	mA
Close LED Curr	ent	I <sub>FC</sub>	I <sub>OFF</sub> = 100 μA	0.1	_	_	mA
On-State Resistance	A Connection		I <sub>ON</sub> = 500 mA, I <sub>F</sub> = 5 mA	_	1	2	
	B Connection	R <sub>ON</sub>	I <sub>ON</sub> = 500 mA, I <sub>F</sub> = 5 mA	_	0.5	1	Ω
	C Connection		I <sub>ON</sub> = 1000 mA, I <sub>F</sub> = 5 mA	_	0.25	_	


#### **ISOLATION CHARACTERISTICS (Ta = 25°C)**


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Capacitance Input to Output	CS	V <sub>S</sub> = 0 V, f = 1 MHz	_	0.8	_	pF
Isolation Resistance	R <sub>S</sub>	V <sub>S</sub> = 500 V, R.H. ≦ 60%	5 × 10 <sup>10</sup>	10 <sup>14</sup>	_	Ω
	BVS	AC, 1 minute	2500	_	_	Vrms
Isolation Voltage		AC, 1 second (in oil)	_	5000	_	VIIIIS
		DC, 1 minute (in oil)	_	5000	_	Vdc


#### **SWITCHING CHARACTERISTICS (Ta = 25°C)**


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Turn-on Time	t <sub>ON</sub>	$R_L = 200 \Omega$ (NOTE 2)	_	0.6	2	ms
Turn-off Time	t <sub>OFF</sub>	$V_{DD} = 20 \text{ V}, I_F = 5 \text{ mA}$		0.1	1	1113
Turn-on Time	t <sub>ON</sub>	$R_L = 200 \Omega$ (NOTE 2)	_	0.3	1	ms
Turn-off Time	tOFF	$V_{DD} = 20 \text{ V}, I_{F} = 10 \text{ mA}$	_	0.1	1	1113


(NOTE 2): SWITCHING TIME TEST CIRCUIT

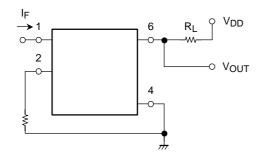





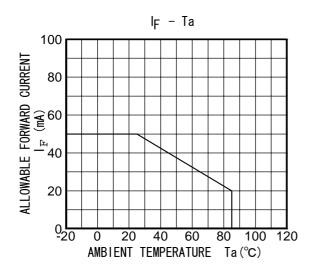


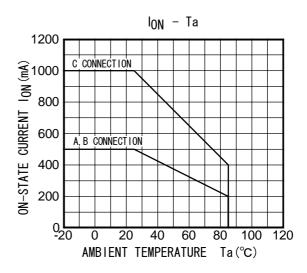


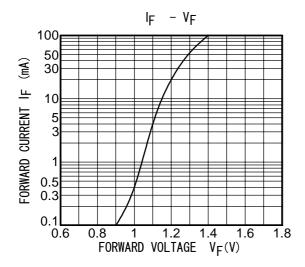


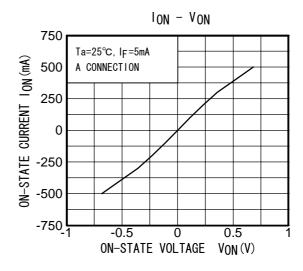


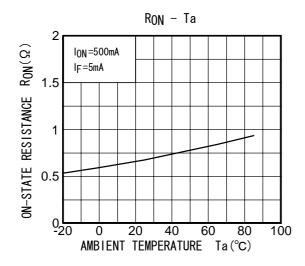

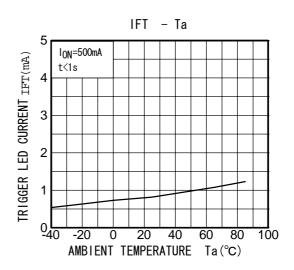

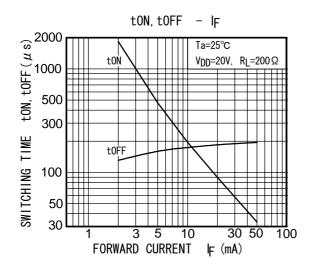

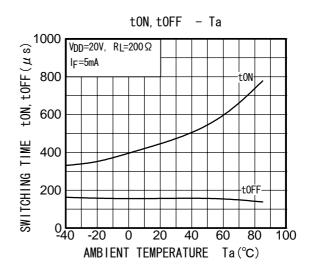

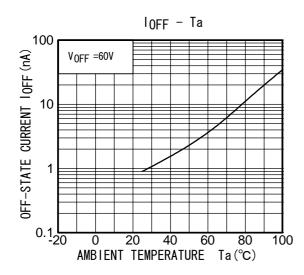

#### RESTRICTIONS ON PRODUCT USE

000707EBC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes
  are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the
  products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with
  domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No
  responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other
  rights of the third parties which may result from its use. No license is granted by implication or otherwise under
  any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.