

DV200-2800S Series

HIGH RELIABILITY DC-DC CONVERTERS

DESCRIPTION

The DV200 series of high reliability, isolated DC-DC converters is operable over a wide (-55 °C to +100 °C) temperature range with no power derating. Unique to the DV200 series is a magnetic feedback circuit that is radiation immune. Operating at a nominal fixed frequency of 500 kHz, these regulated, isolated units utilize well-controlled undervoltage lockout circuitry to eliminate slow start-up problems. The current sharing function allows a maximum of five units to be connected in parallel to boost the total output power to 5 times. The output voltage is trimmable up to +10% or down –20%.

These converters are designed and manufactured in a facility qualified to ISO9001 and certified to MIL-PRF-38534 and MIL-STD-883.

This product may incorporate one or more of the following U.S. patents:

5,784,266 5,790,389 5,963,438 5,999,433 6,005,780 6,084,792 6,118,673

FEATURES

- High Reliability
- Parallel Up to 5 Units With Current Sharing
- Output Voltage Trim Up +10% or Down –20%
- Wide Input Voltage Range: 16 to 50 Volts
- Up to 200 Watts Output Power
- Radiation Immune Magnetic Feedback Circuit
- NO Use of Optoisolators
- Undervoltage Lockout
- Short Circuit Protection
- Current Limit Protection
- Input Transient Voltage: 55 Volts for 1 second
- High Power Density: ≈ 80 W/in³
- Custom Versions Available
- Additional Environmental Screening Available
- Meets MIL-STD-461C and MIL-STD-461D EMC Requirements When Used With a DVMN28 EMI Filter



Figure 1 – DV200-2800S DC-DC Converter (Not To Scale)



 $SPECIFICATIONS \ (T_{CASE} = -55^{\circ}C \ to \ +100^{\circ}C, \ V_{IN} = +28V \pm 5\%, \ Full \ Load, \ Unless \ Otherwise \ Specified)$

ABSOLUTE MAXIMUM RATINGS Input Voltage (Continuous) $50 V_{DC}$ Junction Temperature Rise to Case +25°C -65°C to +135°C Input Voltage (Transient, 1 second)⁴ 55 Volts Storage Temperature Output Power^{1,3} 200 Watts Lead Solder Temperature (10 seconds) 270°C Power Dissipation (Full Load, T_{CASE} = +100°C) 44 Watts Weight (Maximum) 115 Grams

Parameter		Canditions	DV	/200-283R	38	DV200-2805S			Unita
		Conditions	Min	Тур	Max	Min	Тур	Max	Units
STATIC				•		•	•	•	
INPUT		Continuous	16	28	50	16	28	50	V
Voltage⁵		Transient, 1 sec4	-	-	55	-	-	55	V
Current		Inhibited	-	6	10	-	6	10	mA
Current		No Load	-	20	50	-	20	50	mA
Ripple Current		Full Load, 20Hz to 10MHz	-	-	100	-	-	100	mA _{p-p}
Inhibit Pin Input⁴		To Disable Output	0	-	1.5	0	-	1.5	V
Inhibit Pin Open Circuit Volta	age⁴		8	9.5	11	8	9.5	11	V
UVLO Turn On			13.5	15	15.8	13.5	15	15.8	V
UVLO Turn Off⁴			10.0	12.0	14.0	10.5	12.0	14.0	V
OUTPUT	V _{OUT}	T _{CASE} = 25°C	3.267	3.30	3.333	4.95	5.00	5.05	V
Voltage	V_{OUT}	T _{CASE} = -55°C to +100°C	3.25	3.30	3.35	4.925	5.00	5.075	V
_ 3		V _{IN} = 18V to 50V	0	-	100	0	-	150	W
Power ³		V _{IN} = 16V to 18V	0	-	60	0	-	90	W
- 3		V _{IN} = 18V to 50V	0	-	30	0	-	30	Α
Current ³	I _{OUT}	V _{IN} = 16V to 18V	0	-	18	0	-	18	Α
	V _{OUT}	Full Load, 10kHz to 10MHz	-	50	150	-	50	150	mV _{p-p}
Ripple Voltage	V_{OUT}	Full Load, 10kHz to 2MHz	-	10	50	-	10	50	mV _{p-p}
Line Regulation	V _{out}	V _{IN} = 18V to 50V	-	10	80	-	10	80	mV
Load Regulation	V _{out}	No Load to Full Load	-	10	100	-	10	100	mV
Voltage Trim	V _{out}	Full Load	-20	0	10	-20	-	10	%
EFFICIENCY		Full Load	74	80	-	79	83	-	%
		Overload ⁴	-	45	-	-	45	-	W
LOAD FAULT POWER DISSIPA	ATION	Short Circuit ⁴	-	45	-	-	45	-	W
CAPACITIVE LOAD⁴			-	-	2000	-	-	2000	μF
SWITCHING FREQUENCY			450	500	550	450	500	550	kHz
SYNC FREQUENCY RANGE		$V_H - V_L = 5V$ Duty Cycle = 20% - 80%	450	500	550	450	500	550	kHz
ISOLATION		500 V _{DC}	100	-	-	100	-	-	ΜΩ
MTBF (MIL-HDBK-217F)		GB @ T _C = 55°C	-	955	-	-	955	-	kHrs
DYNAMIC				l.		l.	l.	<u> </u>	
Load Step Output Transient V _{OUT}		Holf Lood to Full Lood	-	200	450	-	300	550	mV_{PK}
Load Step Recovery ²		Half Load to Full Load	-	200	650	-	200	600	μSec
Line Step Output Transient4	V _{OUT}	V 40V/1- 40V/	-	150	300	-	150	300	mV_{PK}
Line Step Recovery ^{2, 4}		$V_{IN} = 18V \text{ to } 40V$	-	50	150	-	50	150	μSec
Turn On Delay	V _{OUT}	V 0V (00) (-	20	30	-	20	30	mSec
Turn On Overshoot		$V_{IN} = 0V \text{ to } 28V$	-	0	30	-	0	50	mV_{PK}

Notes: 1. Dependant on output voltage. 2. Time for output voltage to settle within 1% of its nominal value. 3. Derate linearly to 0 at 110°C. 4. Verified by qualification testing. 5. 100% output power available for V_{IN} = 18V to 50V and only 60% output power available for V_{IN} = 16V to 18V.



 $SPECIFICATIONS \ (T_{CASE} = -55^{\circ}C \ to \ +100^{\circ}C, \ V_{IN} = +28V \pm 5\%, \ Full \ Load, \ Unless \ Otherwise \ Specified)$

ABSOLUTE MAXIMUM RATINGS Input Voltage (Continuous) Junction Temperature Rise to Case +25°C $50 V_{DC}$ Input Voltage (Transient, 1 second)⁴ 55 Volts Storage Temperature -65°C to +135°C Output Power^{1,3} 200 Watts Lead Solder Temperature (10 seconds) 270°C Power Dissipation (Full Load, T_{CASE} = +100°C) 44 Watts Weight (Maximum) 115 Grams

Parameter		Conditions	D'	V200-2812	28	D	V200-281	5S	Unita
		Conditions	Min	Тур	Max	Min	Тур	Max	Units
STATIC									
INPUT _		Continuous	16	28	50	16	28	50	V
Voltage⁵		Transient, 1 sec⁴	-	-	55	-	-	55	V
Current		Inhibited	-	6	10	-	6	10	mA
Current		No Load	-	20	50	-	20	50	mA
Ripple Current		Full Load, 20Hz to 10MHz	-	-	150	-	-	150	mA _{p-p}
Inhibit Pin Input⁴		To Disable Output	0	-	1.5	0	-	1.5	V
Inhibit Pin Open Circuit Volt	tage ⁴		8	9.5	11	8	9.5	11	V
UVLO Turn On			13.5	15	15.8	13.5	15	15.8	V
UVLO Turn Off⁴			10.0	12.0	14.0	10.0	12.0	14.0	V
OUTPUT	V _{out}	T _{CASE} = 25°C	11.88	12.0	12.12	14.85	15.0	15.15	V
Voltage	V_{OUT}	T _{CASE} = -55°C to +100°C	11.82	12.0	12.18	14.775	15.0	15.225	V
3		V _{IN} = 18V to 50V	0	-	175	0	-	200	W
Power ³		V _{IN} = 16V to 18V	0	-	105	0	-	120	W
3		V _{IN} = 18V to 50V	0	-	14.6	0	-	13.3	Α
Current ³	I _{OUT}	V _{IN} = 16V to 18V	0	-	8.76	0	-	7.98	Α
	V _{OUT}	Full Load, 10kHz to 10MHz	-	100	200	-	100	200	mV _{p-p}
Ripple Voltage	V_{OUT}	Full Load, 10kHz to 2MHz	-	5	30	-	5	30	mV_{p-p}
Line Regulation	V_{OUT}	V _{IN} = 18V to 50V	-	10	100	-	10	100	mV
Load Regulation	V _{OUT}	No Load to Full Load	-	10	120	-	10	120	mV
Voltage Trim	V _{OUT}	Full Load	-20	-	10	-20	-	10	%
EFFICIENCY		Full Load	82	84	-	82	86	-	%
		Overload ⁴	-	45	-	-	45	-	W
LOAD FAULT POWER DISSIPA	ATION	Short Circuit ⁴	-	45	-	-	45	-	W
CAPACITIVE LOAD⁴			-	-	1000	-	-	1000	μF
SWITCHING FREQUENCY			450	500	550	450	500	550	kHz
SYNC FREQUENCY RANGE		$V_H - V_L = 5V$ Duty Cycle = 20% - 80%	450	500	550	450	500	550	kHz
ISOLATION		500 V _{DC}	100	-	-	100	-	-	ΜΩ
MTBF (MIL-HDBK-217F)		GB @ T _C = 55°C	-	955	-	-	955	-	kHrs
DYNAMIC								l.	
Load Step Output Transient	V _{OUT}	Holf Lood to Full Lood	-	550	1000	-	1000	1350	mV_{PK}
Load Step Recovery ²		Half Load to Full Load	-	200	400	-	200	500	μSec
Line Step Output Transient⁴	V _{OUT}	10111 1011	-	1000	1200	-	1000	1200	mV _{PK}
Line Step Recovery ^{2, 4}		$V_{IN} = 18V \text{ to } 40V$	-	50	200	-	50	200	μSec
Turn On Delay	V _{OUT}		-	20	30	-	20	30	mSec
Turn On Overshoot	***	$V_{IN} = 0V \text{ to } 28V$	-	-	50	-	-	50	mV_{PK}

Notes: 1. Dependant on output voltage. 2. Time for output voltage to settle within 1% of its nominal value. 3. Derate linearly to 0 at 110°C. 4. Verified by qualification testing. 5. 100% output power available for V_{IN} = 18V to 50V and only 60% output power available for V_{IN} = 16V to 18V.



DV200-2800S Series

BLOCK DIAGRAM

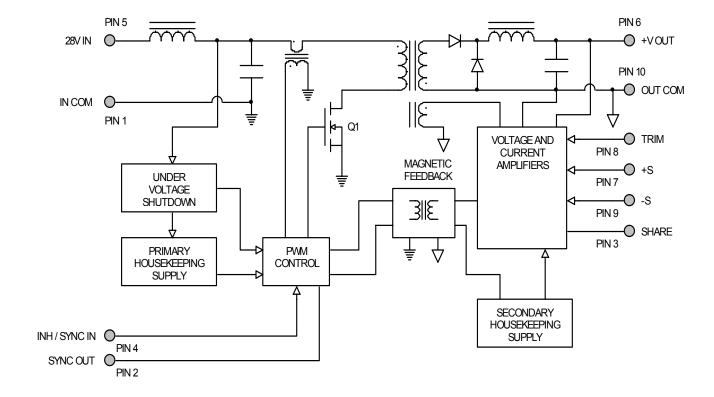


Figure 2

CONNECTION DIAGRAM

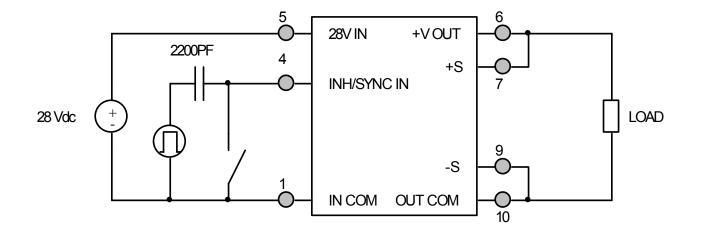


Figure 3



INHIBIT DRIVE CONNECTION DIAGRAMS

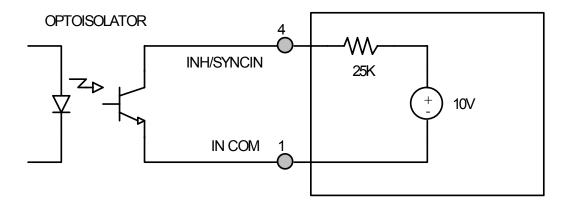


Figure 4 – Isolated Inhibit Drive and Internal Equivalent Circuit

PARALLEL CONNECTION DIAGRAM


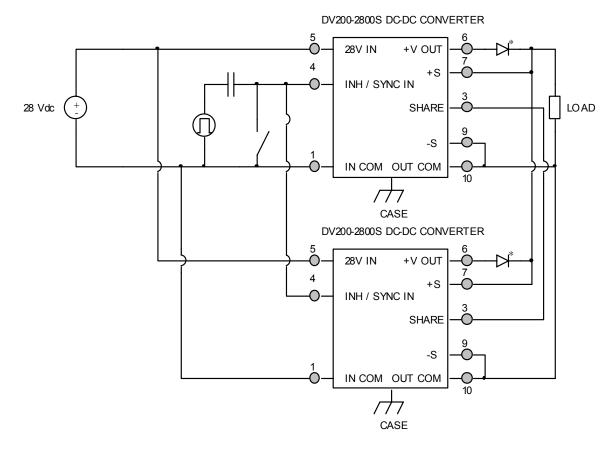


Figure 5 – Parallel Connection with Current Sharing (*Shown with optional "OR" ing diode)



OUTPUT VOLTAGE TRIM

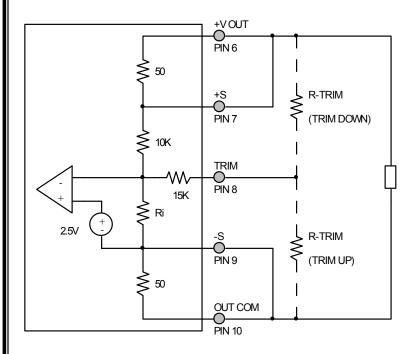


The output voltage can be trimmed down by connecting a resistor between the TRIM pin (PIN 8) and the +V OUT pin (PIN 6), or can be trimmed up by connecting a resistor between the TRIM pin (PIN 8) and the OUT COM pin (PIN 10). The maximum trim range is +10% up and -20% down. The appropriate resistor values versus the output voltage are given in the trim table below.

Figure 6 - Output Voltage Trim


DV200-	283R3S	DV200-	2805S	DV200-2812S		DV200	-2815S
+V _{OUT} (V)	R _{TRIM} (Ω)						
3.60	68.3k	5.5	35k	13.2	5.8k	16.50	1.7k
3.55	85k	5.4	47.5k	13.0	10k	16.25	5k
3.50	110k	5.3	68.3k	12.8	16.2k	16.00	10k
3.45	151.7k	5.2	110k	12.6	26.6k	15.75	18.3k
3.40	235k	5.1	235k	12.4	47.3k	15.50	35k
3.35	485k	5.0	-	12.2	109k	15.25	85k
3.30	-	4.9	225k	12.0	-	15.00	-
3.25	135k	4.8	100k	11.8	454k	14.75	475k
3.20	55k	4.7	58.3k	11.6	213k	14.50	225k
3.15	28.3k	4.6	37.5k	11.4	134k	14.25	142k
3.10	15k	4.5	25k	11.2	94k	14.00	100k
3.05	7k	4.4	16.7k	11.0	70.1k	13.75	75k
3.00	1.7k	4.3	10.7k	10.8	54.3k	13.50	58.3k
		4.2	6.3k	10.6	42.9k	13.25	46.4k
		4.1	2.8k	10.4	34.4k	13.00	37.5k
		4.0	0	10.2	27.8k	12.75	30.6k
				10.0	22.5k	12.50	25k
				9.8	18.2k	12.25	20.5k
				9.6	14.6k	12.00	16.7k



PACKAGE SPECIFICATIONS

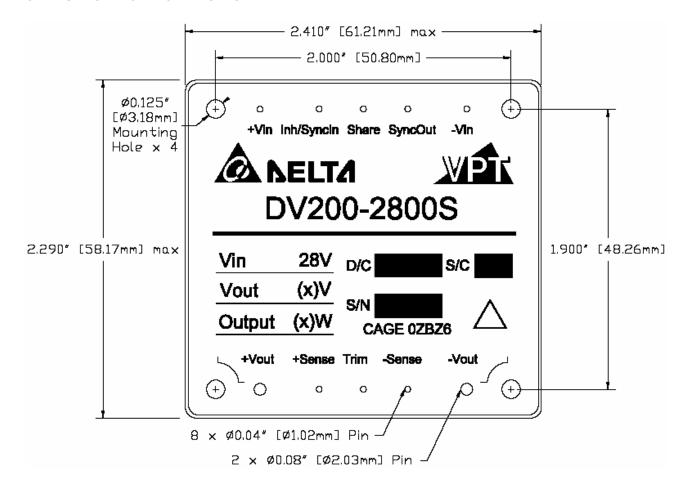

TOP VIEW

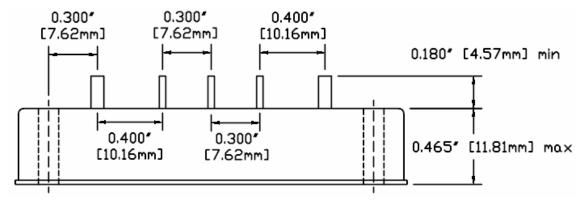

PIN	FUNCTION
1	IN COM
2	SYNC OUT
3	SHARE
4	INH / SYNC IN
5	28V IN
6	+V OUT
7	+S
8	TRIM
9	-S
10	OUT COM

SIDE VIEW

Figure 7 – Package and Pinout (Dimensional Limits are ±0.005" Unless Otherwise Stated)



PACKAGE PIN DESCRIPTION

Pin	Function	Description
1	IN COM	Input Common Connection
2	SYNC OUT	Output Synchronization Signal
3	SHARE	Current Share
4	INH / SYNC IN	Logic Low = Disabled Output. Unconnected or open collector TTL or Square-wave Synchronization Signal = Enabled Output.
5	28V IN	Positive Input Voltage Connection
6	+V OUT	Positive Output Voltage Connection
7	+S	Positive Sense
8	TRIM	Trim Output Voltage to +10%, -20% of Nominal Value
9	-S	Return Sense
10	OUT COM	Output Common Connection


ENVIRONMENTAL SCREENING

Screening	Condition	Standard (No Suffix)	Military /ML
Pre-Cap Inspection	IPC-A-610 Class II	•	•
Temperature Cycling	-55°C, 100°C, 10 Cycles		•
Burn-In	96 hours at +100°C 12 hours at +100°C	•	•
Final Electrical	100% at -55°C, 25°C, 100°C ¹ 100% at 25°C	•	•
Final Inspection	MIL-STD-883, Test Method 2009	•	•

Note: 1. 100% R&R testing at –55°C, +25°C, and +100°C with all test data included in product shipment.



ORDERING INFORMATION



(1) (2)

Product Series	Nominal Input Voltage		Output	Voltage
DV200-	28	28 Volts	3R3 05 12 15	3.3 Volts 5 Volts 12 Volts 15 Volts

(4) (5)

Number of Outputs		Screenir	ng Code ¹	Additional Screening Code	
s	Single	None /ML	Standard Military	Contact Sales	

Notes: 1. VPT Inc. reserves the right to ship higher screened products to meet lower screened orders at our sole discretion unless specifically forbidden by customer contract.

Please contact your sales representative or the VPT Inc. Sales Department for more information concerning additional environmental screening and testing, different input voltage, output voltage, power requirement, source inspection, and/or special element evaluation for space or other higher quality applications.



CONTACT INFORMATION

To request a quotation or place orders please contact your sales representative or the VPT Inc. Sales Department at:

Phone: (425) 353-3010 **Fax**: (425) 353-4030

E-mail: vptsales@vpt-inc.com

All information contained in this datasheet is believed to be accurate, however, no responsibility is assumed for possible errors or omissions. The products or specifications contained herein are subject to change without notice.