



# Micro-Miniature Interface Connectors For Power Supply/Signaling

## MQ172 Series

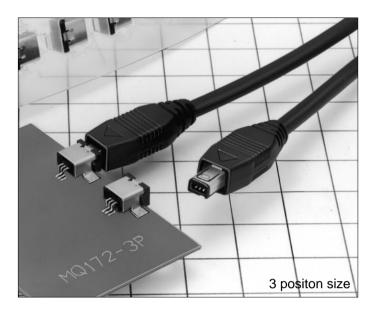

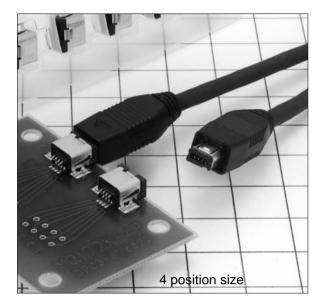

### **■**Fatures

## 1. Ultra Miniature/Low Profile SMT Design

With dimensions of 3.9mm(H) x 6.4mm (W) x 6mm (D) for the 3 contact type, this series is ideal for today's miniature, lightweight electronic products.

## 2. Automatic Mounting:

SMT receptacles are packaged in embossed tape and reel for automatic pick and place installation.

#### 3. Reliable contact:

The 2-point contact design and lead construction provide a contact which is resistant to vibration and shocks.

### 4. High current capacity:

Unique contact design ensures high current capacity (e.g., 3A for 3position), small as it is.

#### 5. Positive Locking

Use of a snap-lock system provides the sensation of locking at the time of insertion.

### 6. Wide variety of suitable cables:

A wide selection of cable types can be utilized since the plug is of the soldered wiring type.


Additionally, the plug case and cord bushing are integrated into a one piece body, allowing for easy assembly by simply pressing the case into place after the harness work.


#### 6. Keys for preventing incorrect insertion:

Both 3 and 4-contact types have keys to prevent incorrect insertion.

# **■**Applications

Portable remote terminals, portable telephones, PHS(personal handy phone system), Notebook PCs, Electronic measuring instruments, etc.

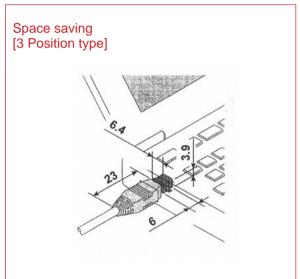

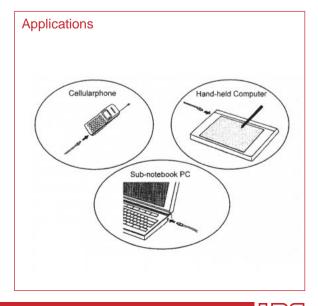

## **■**Product Specifications

Rated Current: 3A (Note.1)
RATINGS
Rated Voltage: DC 30V or less

Applicable Temperature Range:

-30℃ - +75℃

plug)

AC 40V or less

DESCRIPTION **SPECIFICATIONS REQUIREMENTS** 1. Insulation resistance  $1000M\Omega$  or more Should be measured at DC 100V. 2. Voltage resistance No flashover/dielectric Breakdown Should be powered at AC 250V for 1 minute. 3. Contact resistance 30mΩ or less Measured at 10mA. 4. Vibration No instantaneous electric 10~55Hz, one-sided amplitude 0.75mm, 3 resistance Disconnection of 1µsec or more directions for 2 hours, respectively 5. Humidity Contact resistance: 50mΩ or less Leave under the condition of 40±2°C in temperature resistance Insulation resistance: 10MΩ or more and of 90-95% in humidity for 96 hours. (-55°C: 30 minutes →15-35°C:max. 5 minutes →85°C: 6. Temperature cycle Contact resistance: 50mΩ or less 30 minutes→ 15-35°C:max. 5 minutes) 5 cycles Insulation resistance: 1000MΩ or more 7. Plugging/ unplugging life Contact resistance: 50mΩ or less 5,000 times 8. Heat resistance of No fusion of resin section affecting performance SMT type reflow: at recommended temp. profile soldering manual soldering Temperature of soldering iron: (receptacle and 350°C3 sec.

(Note.1) For 4-contact type, rated current is 2A, or 3A for optional 2 terminals and 0.5A for other 2 terminals.

(Note.2) Above-stated specifications are typical of this series. For respective formal contract, please refer to "Delivery Specifications".

# **■**Material Quality

Parts	Material	Processing	Remarks
Dielectric	Synthetic resin	Black color	UL94V-0
Tarminal	Phosphor	Engagement areaGold plating of 0.2µm	
Terminal	bronze	Lead sectionSolder-plating	
Cover case(plug)	Synthetic resin	Black color	UL94V-0
Metal fittings(receptacle)	Stainless steel		
Lock case(plug)	Stainless steel		

# ■ Product Number Configuration

This is available for you to determine the product specifications from its format.

When ordering, please select any one among all formats shown in page 3-4 of this catalog.

#### **●**RECEPTACLE

 $\frac{MQ172}{1} \frac{X}{2} - \frac{4}{8} \frac{P}{4} \frac{A}{6} \frac{(11)}{6}$ 

#### **●PLUG**

 $\frac{MQ172}{0} \frac{X}{2} - \frac{4}{6} \frac{S}{0} \frac{A}{6} - \frac{CV}{0}$ 


0	Series name: MQ172
2	Series configuration symbol: noneunshielded type
	Xshielded type
8	Number of contacts: 3, 4
4	Connector type: Preceptacle
	Splug
6	Key type symbol: A (only for A type)
Packing type: nonetray-based packing	
	(11)embossed tape packing
7	Cover case type: CVstandard product (color: black)


# **■Plugs**


## ●3-Position type



Parts No.	HRS No.	
MQ172-3SA-CV	CL206-0951-7	

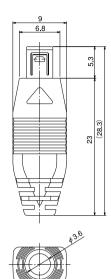








## ●4-Position type



Parts No.	HRS No.
MQ172X-4SA-CV	CL206-2001-9









# **■**Harness Tool


Tool name	Parts No.	HRS No.	Parts name of adaptive plugs	Adaptive cable
Cable caulking jig	MQ172-3S/CK-MP	CL902-2069-4	MQ172-3SA-CV	Outside diameter:
	MQ172-4S/CK-MP	CL902-2070-3	MQ172X-4SA-CV	AWG#24-#32


(Note.) As the crimp height after crimping depends on cable type, please consult factory about your designated cable.


# **■**Receptacles

## ●3-Position type











Parts No.	HRS No.	
MQ172-3PA-(* *)	CL206-0950-4(* *)	

\* \* none : tray-based packing 11: embossed tape packing (1 reel = 1,000 roles)



# **●**Illustration Of Receptacle Set Installed





(Note.) For MQ172, mounting to circuit boards is SMT type.

> For the purpose of more adequate fixing against external force, it is desirable to affix the entire set after setting as shown in the figure above.


## ●4-Position type








1	
39	HEID-
15	
1 90	<b>├</b> ──\\ '
0	φ 0.9 3.6
	3.6
	ر%




Parts No.	HRS No.	
MQ172X-4PA-(* *)	CL206-2000-6(* *)	

\* \* none : tray-based packing 11: embossed tape packing (1 reel = 1,000 roles)




# **●**Recommended Land Pattern Dimensions Diagram

## ●3-Position type

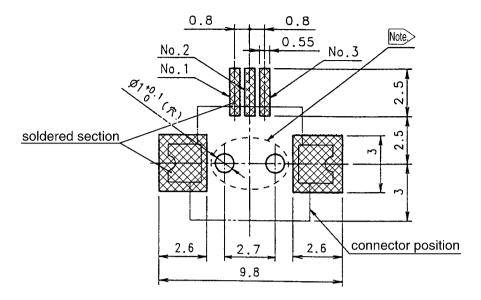

## ●4-Position type

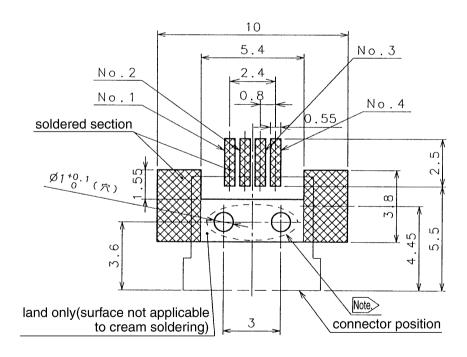


Note.) Mounting of this product to circuit boards is the SMT type.

To provide more adequate fixing, use of adhesive for board-installed area is recommended.


# **●** Embossed Tape Carrier Dimensions Diagam(JIS-C-0806 dependent)

## **•**Carrier Dimensions Diagram

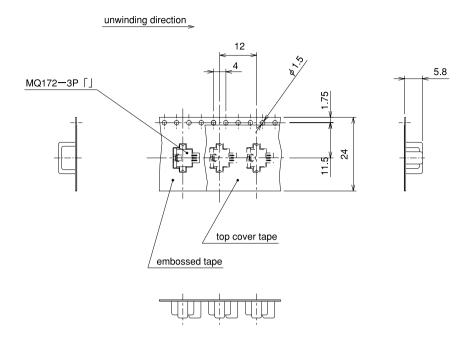


(Note.) The figure above provides the case of a 3 contact type, dimensions shown in such figure are the same as those of a 4 contact type.

## ●Reel Status Diagram

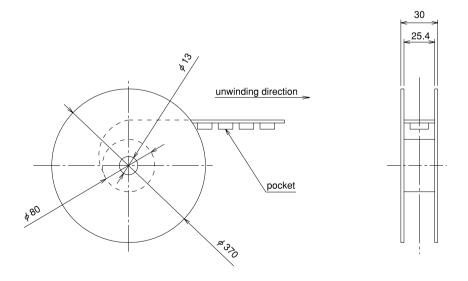

## **●**Recommended Temperature Profile

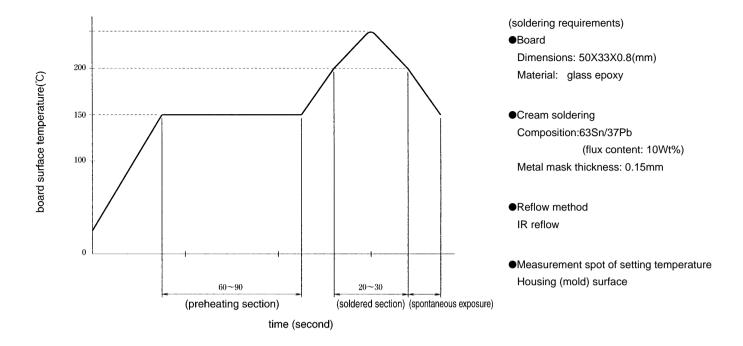

## **◆Cleaning Requirements**

## (1) Organic solvent-based cleaning

Solvent	Normal temp.	Heating
IPA	YES	YES
(Isopropyl Alcohol)	TES	TES
HCFC	YES	YES
(Hydro-chloro-fluoric carbon)	165	165

#### (2) Water-based cleaning

When using water-based detergent (e.g., terpene or alkali saponifier, etc.), select appropriate detergent on the basis of those lists describing effects on metals/resins issued by each detergent manufacturer. Further be careful not to leave any moisture.

## (3) Cautions on cleaning

In cleaning with organic solvent or water-based detergent, residual flux or detergent on the connector may cause excessive degradation of electrical performance. Check fully that reliable cleaning is provided.