

# 2SD0602A

## Silicon NPN epitaxial planer type


For general amplification  
Complementary to 2SB0710A

### ■ Features

- Low collector to emitter saturation voltage  $V_{CE(sat)}$
- Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing.

### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector to base voltage	$V_{CBO}$	60	V
Collector to emitter voltage	$V_{CEO}$	50	V
Emitter to base voltage	$V_{EBO}$	5	V
Peak collector current	$I_{CP}$	1	A
Collector current	$I_C$	500	mA
Collector power dissipation	$P_C$	200	mW
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

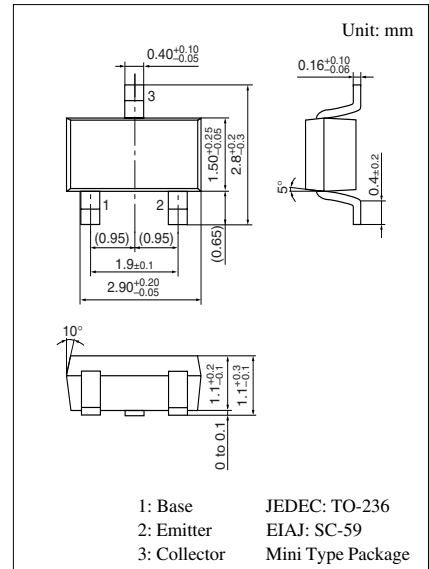

Marking Symbol: X

### ■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$










Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector cutoff current	$I_{CBO}$	$V_{CB} = 20\text{ V}, I_E = 0$			0.1	$\mu\text{A}$
Collector to base voltage	$V_{CBO}$	$I_C = 10\ \mu\text{A}, I_E = 0$	60			V
Collector to emitter voltage	$V_{CEO}$	$I_C = 10\ \text{mA}, I_B = 0$	50			V
Emitter to base voltage	$V_{EBO}$	$I_E = 10\ \mu\text{A}, I_C = 0$	5			V
Forward current transfer ratio *1	$h_{FE1}$ *2	$V_{CE} = 10\ \text{V}, I_C = 150\ \text{mA}$	85		340	
	$h_{FE2}$	$V_{CE} = 10\ \text{V}, I_C = 500\ \text{mA}$	40			
Collector to emitter saturation voltage *1	$V_{CE(sat)}$	$I_C = 300\ \text{mA}, I_B = 30\ \text{mA}$		0.35	0.6	V
Transition frequency	$f_T$	$V_{CB} = 10\ \text{V}, I_E = -50\ \text{mA}, f = 200\ \text{MHz}$		200		MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = 10\ \text{V}, I_E = 0, f = 1\ \text{MHz}$		6	15	pF

Note) \*1: Pulse measurement

\*2: Rank classification

Rank	Q	R	S	No-rank
$h_{FE1}$	85 to 170	120 to 240	170 to 340	85 to 340
Marking symbol	XQ	XR	XS	X

Product of no-rank is not classified and have no indication for rank.

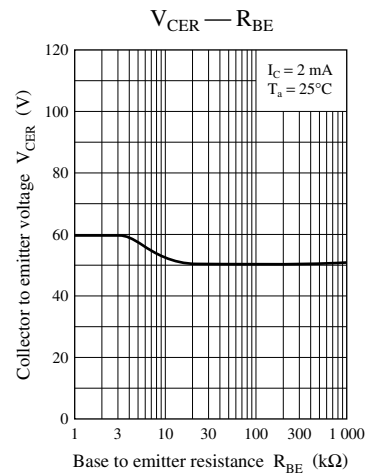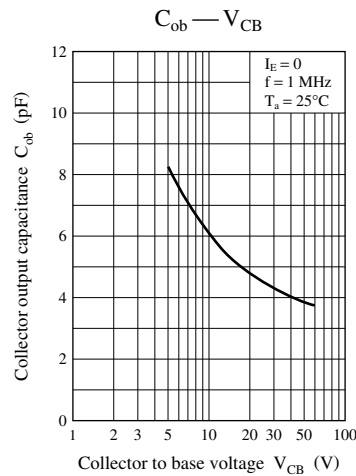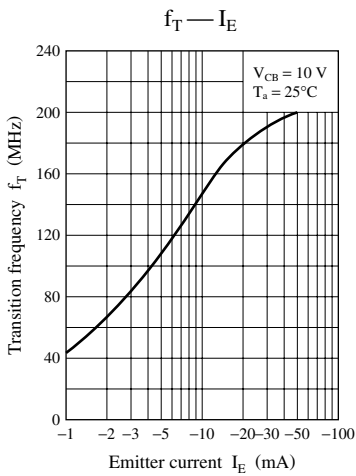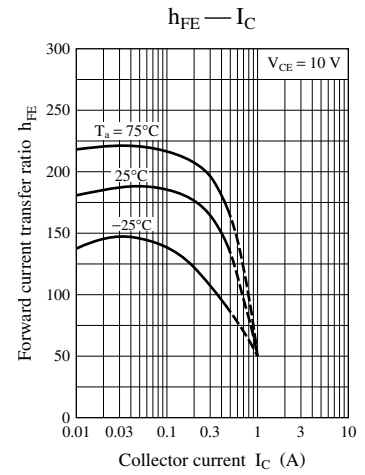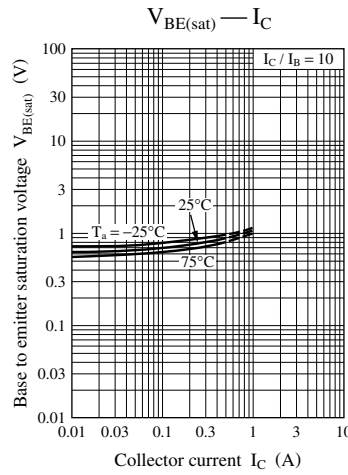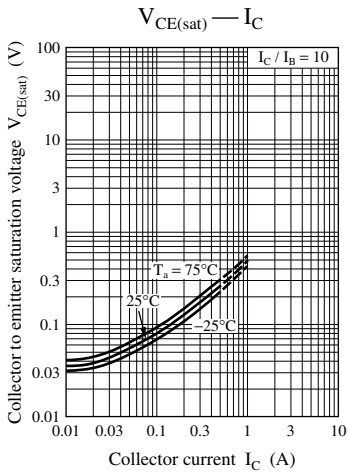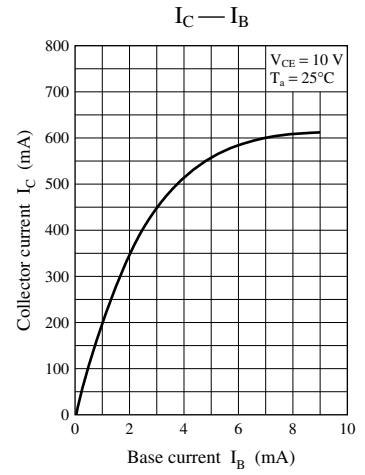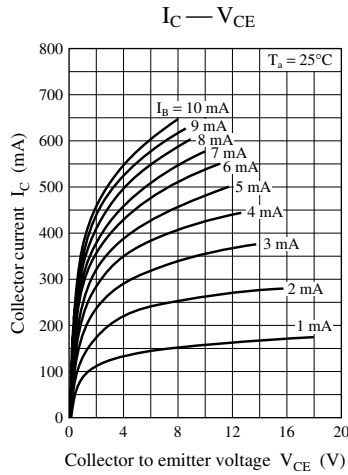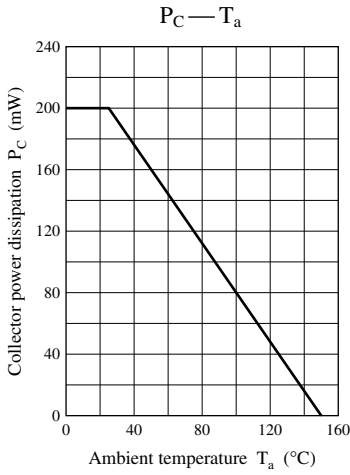

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.