

AWT6301

ADVANCED PRODUCT INFORMATION - Rev 0.1

FEATURES

- InGaP HBT Technology
- High Efficiency: 53 % AMPS, 39 % CDMA
- Low Quiescent Current: 50 mA
- Low Leakage Current in Shutdown Mode: <1 uA
- $V_{REF} = +2.85 \text{ V (+2.7 V Min Over Temp.)}$
- Optimized for a 50 Ω System
- Low Profile Surface Mount Package: 1.1mm
- CDMA 1XRTT, 1xEV-DO Compliant
- Pinout Enables Easy Phone Board Migration From 4mm x 4mm Package

APPLICATIONS


- Single Mode CDMA Wireless Handsets
- Dual Mode AMPS/CDMA Wireless Handsets

PRODUCT DESCRIPTION

The AWT6301 meets the increasing demands for higher efficiency and linearity in AMPS/CDMA 1X handsets, while reducing pcb area by 44%. The package pinout was chosen to enable handset manufacturers to switch from a 4mm x 4mm PA module with very few layout changes to the phone board. The device is manufactured on an advanced InGaP HBT MMIC technology offering state-of-the-

M9 Package 8 Pin 3mm x 3mm **Surface Mount Module**

art reliability, temperature stability, and ruggedness. Selectable bias modes that optimize efficiency for different output power levels, and a shutdown mode with low leakage current, serve to increase handset talk and standby time. The self contained 3mm x 3mm surface mount package incorporates matching networks optimized for output power, efficiency and linearity in a 50 Ω system.

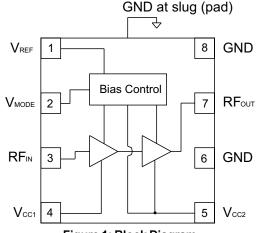

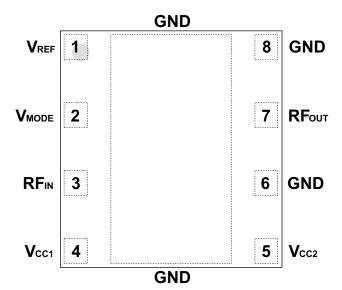


Figure 2: Pinout (X-ray Top View)

Table 1: Pin Description

PIN	NAME	DESCRIPTION	
1	V_{REF}	Reference Voltage	
2	V _{MODE}	Mode Control	
3	RFℕ	RF Input	
4	Vcc1	Supply Voltage	
5	Vcc2	Supply Voltage	
6	GND	Ground	
7	RFout	RF Output	
8	GND	Ground	

ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

PARAMETER	MIN	MAX	UNIT
Supply Voltage (Vcc) With RF Drive DC Only	0 0	+5 +8	٧
Mode Control Voltage (V _{MODE})	0	+3.5	V
Reference Voltage (VREF)	0	+3.5	V
RF Input Power (P _{IN})	-	+10	dBm
Storage Temperature (Tstg)	-40	+150	°C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Table 3: Operating Ranges

ranio di operating ranigo						
PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS	
Operating Frequency (f)	824	-	849	MHz		
Supply Voltage (Vcc)	+3.2	+3.4	+4.2	V		
Reference Voltage (VREF)	+2.7 0	+2.85 -	+3.1 +0.5	V	PA "on" PA "shut down"	
Mode Control Voltage (V _{MODE})	Control Voltage (V _{MODE}) +2.5 +2.8 +3.1 , 0 - +0.5		V	Low Bias Mode High Bias Mode		
RF Output Power (Pout) 30.5 ⁽¹⁾ 27.5 ⁽¹⁾ 31.0 - dBm		AMPS CDMA				
Case Temperature (Tc)	-20	-	+85	°C		

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Notes:

(1) For operation at T_c = +85 °C and V_{cc} = +3.2 V, P_{OUT} is derated by 0.5 dB.



Table 4: Electrical Specifications - AMPS Operation (Tc = +25 °C, Vcc = +3.4 V, VREF = +2.85 V, VMODE = 0 V, POUT = +31 dBm, 50 Ω system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain	25 23.5	27 27	30 31	dB	Over Temperature
Gain Variation	-	0.3	1.0	dB	Over Temperature
Power-Added Efficiency	50	53	-	%	
Quiescent Current (lcq)	-	100	120	mA	V _{MODE} = 0 V, High Bias
Reference Current	-	5.0	8	mA	through VREF pin
Mode Control Current	-	0.35	1.0	mA	through Vмоде pin
Leakage Current	-	<1	5	μΑ	Vcc = +4.2 V, VREF = 0 V, VMODE = 0 V
Noise in Receive Band	-	-134	-132	dBm/Hz	869 MHz to 894 MHz
Harmonics 2fo 3fo, 4fo	-	-35 -50	-30 -30	dBc	
Input Impedance	-	-	2:1	VSWR	
Spurious Output Level (all spurious outputs)	-	-	-65	dBc	Poυτ ≤ +31 dBm Load VSWR < 8:1 Applies over all voltage and temperature operating ranges
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Vcc = +5.0 V PiN = +5 dBm Applies over full operating temperature ranges

Table 5: Electrical Specifications - CDMA Operation (T_c = +25 °C, V_{cc} = +3.4 V, V_{REF} = +2.85 V, 50 Ω system)

PARAMETER MIN TYP MAX UNIT COMMENTS						
PARAMETER	IVIIN	IYP	WAX	UNII	COMMENTS	
Gain	26 24.5 24 23	28 28 26 26	30 31 28 29	dB	POUT = +28 dBm, VMODE = 0 V Over Temperature POUT = +16 dBm, VMODE = +2.85 V Over Temperature	
Adjacent Channel Power at ±885 kHz offset ⁽¹⁾ Primary Channel BW = 1.23 MHZ Adjacent Channel BW = 30 kHz	- - -	-50 - -50 -	-47 -44 -46 -44	dBc	POUT = +28 dBm, VMODE = 0 V Over Temperature POUT = +16 dBm, VMODE = +2.85 V Over Temperature	
Adjacent Channel Power at ±1.98 MHz offset (1) Primary Channel BW = 1.23 MHZ Adjacent Channel BW = 30 kHz	1 1	-60 -68	-57 -57	dBc	POUT = +28 dBm, VMODE = 0 V POUT = +16 dBm, VMODE = +2.85 V Over Temperature	
Power-Added Efficiency (1)	37 8	39 8.5	1 1	%	Роит = +28 dBm, Vморе = 0 V Роит = +16 dBm, Vморе = +2.85 V	
Quiescent Current (lcq)	-	50	60	mA	VMODE = 0 V, Low Bias	
Reference Current	-	5	8	mA	through VREF pin	
Mode Control Current	-	0.35	1.0	mA	through VMODE pin	
Leakage Current	-	<1	5	μΑ	Vcc = +4.2 V, VREF = 0 V, VMODE = 0 V	
Noise in Receive Band	-	-135	-133	dBm/Hz	869 MHz to 894 MHz	
Harmonics 2fo 3fo, 4fo	1 1	-35 -50	-30 -30	dBc		
Input Impedance	-	-	2:1	VSWR		
Spurious Output Level (all spurious outputs)	-	1	-65	dBc	Poυτ ≤ +28 dBm Load VSWR < 8:1 Applies over all voltage and temperature operating ranges	
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Vcc = +5.0 V P _{IN} = +5 dBm Applies over full operating temperature ranges	

Notes.

(1) PAE and ACP limit applies at 836.5 MHz.



AWT6301

APPLICATION INFORMATION

To ensure proper performance, refer to all related Application Notes on the ANADIGICS web site: http://www.anadigics.com

Shutdown Mode

The power amplifier may be placed in a shutdown mode by applying a logic low levels (see Operating Ranges table) to both the VREF and VMODE voltages.


Bias Modes

The power amplifier may be placed in either a Low Bias mode or a High Bias mode by applying the appropriate logic level (see Operating Ranges table) to the VMODE voltage. The Bias Control table lists the recommended modes of operation for various applications.

Table 6: Bias Control

APPLICATION	Pout LEVELS	BIAS MODE	VREF	V _{MODE}
AMPS	(all)	High	+2.85 V	0 V
CDMA - low power	<+16 dBm	Low	+2.85 V	+2.85 V
CDMA - high power	>+16 dBm	High	+2.85 V	0 V
Shutdown	-	Shutdown	0 V	0 V

PACKAGE OUTLINE

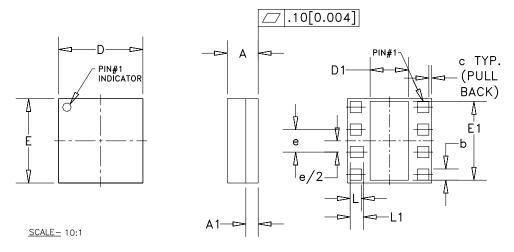

SYMBOL	MILLIMETERS				NOTE		
-0 _L	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
Α	1.01	1.10	1.19	0.039	0.043	0.047	-
A1	-	0.44	-	-	0.017	-	-
b	-	0.40	-	-	0.015	-	8X
С	-	0.10	-	-	0.004	-	-
D	2.88	3.00	3.12	0.113	0.118	0.123	-
D1	ı	1.35	-	-	0.053	ı	ı
Ε	2.88	3.00	3.12	0.113	0.118	0.123	-
E1	-	2.80	-	-	0.110	1	-
е	C	.80 BS	2	0.	0315 B	SC	-
L		0.40			0.015		7X
1.1		0.47			0.018		1 X

NOTES:

- 1. CONTROLLING DIMENSIONS: MILLIMETERS
 2. UNLESS SPECIFIED TOLERANCE=±0.076[0.003].

 _
- -

Figure 3: M9 Package Outline - 8 Pin 3mm x 3mm Surface Mount Module

TOP BRAND



NOTES:

- 1. ANADIGICS LOGO SIZE: NONE
- 2. PART NUMBER: FOUR DIGIT NUMERICAL
- 3. WAFER LOT NUMBER: LLLL = LOT NUMBER

NN = WAFER I.D.

- 4. PIN 1 INDICATOR: LASER DOT
- 5. B.O.M. # BBBB
- 6. COUNTRY CODE: CC = TH-for-THAILAND, TW-for-TAIWAN CC = PH-for-PHILIPPINES, CH-for-CHINA
- 7. TYPE : ARIAL SIZE : 1.5-POINT COLOR : LASER

Figure 4: Branding Specification

NOTES:

COMPONENT PACKAGING

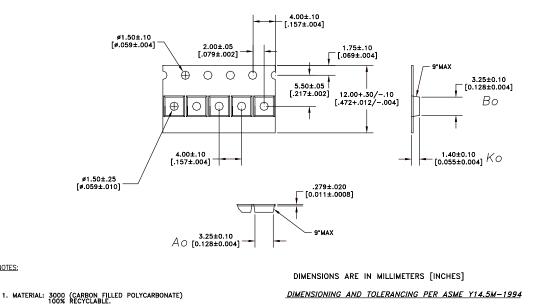


Figure 5: Tape & Reel Packaging

Table 7: Tape & Reel Dimensions

PACKAGE TYPE	TAPE WIDTH	POCKET PITCH	REEL CAPACITY	MAX REEL DIA
3mm X 3mm	12mm	4mm	2500	13"

NOTES



ORDERING INFORMATION

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AWT6301M9P8	-30 °C to +110 °C	8 Pin 3mm x 3mm Surface Mount Module	Tape and Reel, 2500 pieces per Reel



ANADIGICS, Inc.

141 Mount Bethel Road Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000 Fax: +1 (908) 668-5132

URL: http://www.anadigics.com E-mail: Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.

