TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

# TC74HC4514AP

#### 4-to-16 Line Decoder/Latch


The TC74HC4514A are high speed CMOS 4-LINE TO 16-LINE DECODER WITH LATCHED INPUTs fabricated with silicon gate  $\rm C^2MOS$  technology.

It achieves the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

The selected output is enabled by a low on the inhibit input (INHIBIT). A binary code stored in the four input latches (A thru D) is decided and provides a high level at the corresponding one of sixteen outputs. When the INHIBIT is held low, all outputs are kept low however, the latch function is available.

The data applied to the data inputs are transferred to the outputs of latches when the strobe input is held high. When the strobe input is taken low, the data is retained at the output of the latches.

All inputs are equipped with protection circuits against static discharge or transient excess voltage.




Weight: 1.50 g (typ.)

#### **Features**


- High speed:  $t_{pd} = 18 \text{ ns (typ.)}$  at  $V_{CC} = 5 \text{ V}$
- Low power dissipation:  $I_{CC} = 4 \mu A \text{ (max)}$  at  $T_{a} = 25 \text{°C}$
- High noise immunity: V<sub>NIH</sub> = V<sub>NIL</sub> = 28% V<sub>CC</sub> (min)
- Output drive capability: 10 LSTTL loads
- Symmetrical output impedance: | I<sub>OH</sub> | = I<sub>OL</sub> = 4 mA (min)
- Balanced propagation delays:  $t_{pLH} \simeq t_{pHL}$
- Wide operating voltage range: VCC (opr) = 2 to 6 V
- Pin and function compatible with 4514B


#### **Pin Assignment**



1 2007-10-01

# **IEC Logic Symbol**






### **Truth Table**

	lı	Selected Outputs			
Inhibit	Α	В	С	D	"H"
L	L	L	L	L	S0
L	Н	L	L	L	S1
L	L	Н	L	L	S2
L	Н	Н	L	L	S3
L	L	L	Н	L	S4
L	Н	L	Н	L	S5
L	L	Н	Н	L	S6
L	Н	Н	Н	L	S7
L	L	L	L	Н	S8
L	Н	L	L	Н	S9
L	L	Н	L	Н	S10
L	Н	Н	L	Н	S11
L	L	L	Н	Н	S12
L	Н	L	Н	Н	S13
L	L	Н	Н	Н	S14
L	Н	Н	Н	Н	S15
Н	Х	Х	Х	Х	All Outputs "L"

X: Don't care


STROBE = "H"; Refer to truth table

STROBE = "L"



Data at the negative going transition of strobe shall be provided on each output while strobe is held low.

### **System Diagram**

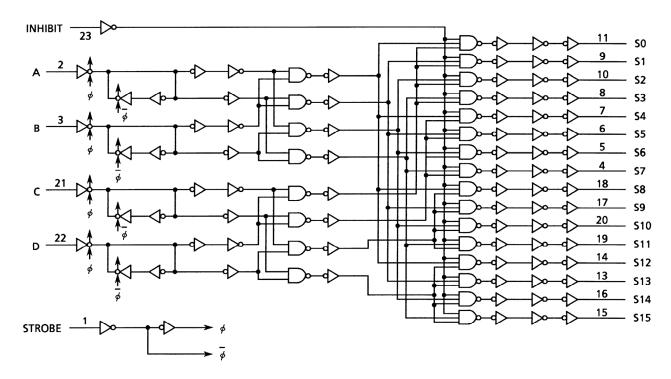

### **Absolute Maximum Ratings (Note 1)**

Characteristics	Symbol	Rating	Unit
Supply voltage range	V <sub>CC</sub>	–0.5 to 7	V
DC input voltage	V <sub>IN</sub>	−0.5 to V <sub>CC</sub> + 0.5	V
DC output voltage	V <sub>OUT</sub>	−0.5 to V <sub>CC</sub> + 0.5	V
Input diode current	lık	±20	mA
Output diode current	I <sub>OK</sub>	±20	mA
DC output current	lout	±25	mA
DC V <sub>CC</sub> /ground current	I <sub>CC</sub>	±50	mA
Power dissipation	P <sub>D</sub>	500 (DIP) (Note 2)	mW
Storage temperature	T <sub>stg</sub>	-65 to 150	°C

Note 1: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 2: 500 mW in the range of Ta = -40 to  $65^{\circ}C$ . From Ta = 65 to  $85^{\circ}C$  a derating factor of -10 mW/°C shall be applied until 300 mW.



# **Operating Ranges (Note)**

Characteristics	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	2 to 6	V
Input voltage	V <sub>IN</sub>	0 to V <sub>CC</sub>	V
Output voltage	V <sub>OUT</sub>	0 to V <sub>CC</sub>	٧
Operating temperature	T <sub>opr</sub>	-40 to 85	°C
		0 to 1000 (V <sub>CC</sub> = 2.0 V)	
Input rise and fall time	t <sub>r</sub> , t <sub>f</sub>	0 to 500 (V <sub>CC</sub> = 4.5 V)	ns
		0 to 400 (V <sub>CC</sub> = 6.0 V)	

Note: The operating ranges must be maintained to ensure the normal operation of the device. Unused inputs must be tied to either VCC or GND.

#### **Electrical Characteristics**

#### **DC Characteristics**

Characteristics	Symbol	Test Condition  Vcc (V)			-	Ta = 25°(	C	Ta = -40 to 85°C		Unit
Characteriotics	Cymbol			V <sub>CC</sub>	Min	Тур.	Max	Min	Max	
		_		2.0	1.50	_	_	1.50	_	
High-level input voltage	V <sub>IH</sub>			4.5	3.15	_	_	3.15	_	V
ŭ				6.0	4.20		_	4.20		
				2.0	_		0.50	_	0.50	
Low-level input voltage	V <sub>IL</sub>	_		4.5	_	_	1.35	_	1.35	V
				6.0	_	_	1.80	_	1.80	
	V <sub>ОН</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>		2.0	1.9	2.0	_	1.9	_	
			$I_{OH} = -20 \mu A$	4.5	4.4	4.5	_	4.4	_	
High-level output voltage				6.0	5.9	6.0	_	5.9	_	V
			$I_{OH} = -4 \text{ mA}$	4.5	4.18	4.31	_	4.13	_	
			$I_{OH} = -5.2 \text{ mA}$	6.0	5.68	5.80	_	5.63	_	
		V <sub>IN</sub> = V <sub>IH</sub> or		2.0	_	0.0	0.1	_	0.1	
			$I_{OL} = 20 \mu A$	4.5	_	0.0	0.1	_	0.1	
Low-level output voltage	V <sub>OL</sub>			6.0	_	0.0	0.1	_	0.1	V
		V <sub>IL</sub>	I <sub>OL</sub> = 4 mA	4.5	_	0.17	0.26	_	0.33	
			$I_{OL} = 5.2 \text{ mA}$	6.0	_	0.18	0.26	_	0.33	
Input leakage current	I <sub>IN</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND		6.0	_	_	±0.1	l	±1.0	μΑ
Quiescent supply current	Icc	$V_{IN} = V_C$	<sub>C</sub> or GND	6.0	_	_	4.0	_	40.0	μΑ

4



# Timing Requirements (input: $t_r = t_f = 6 \text{ ns}$ )

Characteristics	Symbol	Test Condition	Test Condition			Ta = -40 to 85°C	Unit	
			V <sub>CC</sub> (V)	Тур.	Limit	Limit		
Minimum pulse width			2.0	_	75	95		
(STROBE)	t <sub>W (H)</sub>	_	4.5	_	15	19	ns	
(STROBE)			6.0	_	13	16		
Minimum oot un timo	t <sub>S</sub>		2.0	_	50	65		
Minimum set-up time (DATA)		_	4.5	_	10	13	ns	
(DATA)			6.0	_	9	11		
Minimum hold time			2.0	_	5	5		
	t <sub>h</sub>	_	4.5	_	5	5	ns	
(DATA)			6.0	_	5	5		

### AC Characteristics (C<sub>L</sub> = 15 pF, $V_{CC}$ = 5 V, Ta = 25°C, input: $t_r$ = $t_f$ = 6 ns)

Characteristics	Symbol	Test Condition		Тур.	Max	Unit
Output transition time	t <sub>TLH</sub>			4	8	ns
Output transition time	t <sub>THL</sub>	_				113
Propagation delay time	t <sub>pLH</sub>			18	30	ns
(DATA-Sn)	t <sub>pHL</sub>	_				115
Propagation delay time	t <sub>pLH</sub>			20	30	ns
(STROBE-Sn)	t <sub>pHL</sub>	_	_	20	30	115
Propagation delay time	t <sub>pLH</sub>			16	30	ne
(INHIBIT-Sn)	t <sub>pHL</sub>	_		10	30	ns



### AC Characteristics ( $C_L = 50 \text{ pF}$ , input: $t_r = t_f = 6 \text{ ns}$ )

Characteristics	Symbol	Test Condition  Vcc (V)		Ta = 25°C			Ta = - 85	Unit	
Ondracteristics	Cymbol			Min	Тур.	Max	Min	Max	Offic
Output transition time	t <sub>TLH</sub> t <sub>THL</sub>	_	2.0 4.5 6.0	_ _ _	30 8 7	75 15 13	_ _ _	95 19 16	ns
Propagation delay time (DATA-Sn)	<sup>t</sup> pLH <sup>t</sup> pHL	_	2.0 4.5 6.0	_ _ _	65 22 19	175 35 30	_ _ _	220 44 37	ns
Propagation delay time (STROBE-Sn)	<sup>t</sup> pLH <sup>t</sup> pHL	_	2.0 4.5 6.0	_ _ _	75 24 20	175 35 30	_ _ _	220 44 37	ns
Propagation delay time (INHIBIT-Sn)	<sup>t</sup> pLH <sup>t</sup> pHL	_	2.0 4.5 6.0	_ _ _	60 20 17	175 35 30	_ _ _	220 44 37	ns
Input capacitance	C <sub>IN</sub>			_	5	10	_	10	pF
Power dissipation capacitance	C <sub>PD</sub> (Note)				61	_	_	_	pF

Note: C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.


Average operating current can be obtained by the equation:

$$I_{CC} (opr) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$

6 2007-10-01

# **Package Dimensions**

DIP24-P-300-2.54 Unit: mm

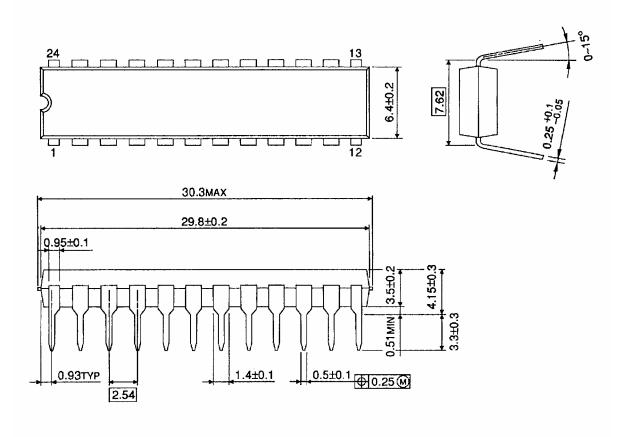

Weight: 1.50 g (typ.)

#### **RESTRICTIONS ON PRODUCT USE**

20070701-EN GENERAL

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS
  compatibility. Please use these products in this document in compliance with all applicable laws and regulations
  that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses
  occurring as a result of noncompliance with applicable laws and regulations.