

Broadband CATV Amplifier 50 - 1000 MHz

Rev. V2

Features

- 75 Ω Input / Output Match
- 3.8 dB Noise Figure
- 9 dB Gain
- Lead-Free SOT-89 Package
- Halogen-Free "Green" Mold Compound
- RoHS* Compliant and 260°C Reflow Compatible

Description

M/A-COM's MAAM-007807 CATV amplifier is a GaAs MMIC which exhibits low distortion in a miniature lead-free surface mount package. MAAM-007807 employs a monolithic single stage design featuring a convenient 75 Ω input/output impedance that minimizes the number of external components required.

The MAAM-007807 provides low noise and high linearity. It is ideally suited for set top boxes, home gateways and other broadband internet based appliances.

The MAAM-007807 is fabricated using M/A-COM's pHEMT process to realize low noise and low distortion. The process features full passivation for robust performance and reliability.


Ordering Information ^{1,2}

Part Number	Package
MAAM-007807-TR1000	1000 piece reel
MAAM-007807-TR3000	3000 piece reel
MAAM-007807-000SMB	Sample Test Board

- 1. Reference Application Note M513 for reel size information.
- 2. All sample boards include 5 loose parts.

1

Functional Schematic

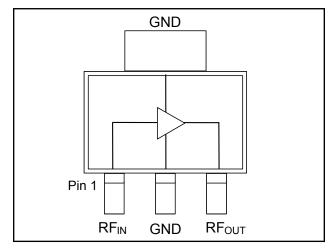

Pin Configuration

Pin No.	Pin Name	Description		
1	RF _{IN}	RF Input		
2	GND	Ground		
3	RF _{out}	RF Output / Drain Supply		

Absolute Maximum Ratings ^{3,4,5}

Parameter	Absolute Maximum
RF Input Power	8 dBm
Voltage	8.0 volts
Operating Temperature	-40°C to +85°C
Junction Temperature ⁶	+150°C
Storage Temperature	-65°C to +150°C

- 3. Exceeding any one or combination of these limits may cause permanent damage to this device.
- 4. M/A-COM does not recommend sustained operation near these survivability limits.
- 5. These operating conditions will ensure MTTF > 1×10^6 hours.
- 6. Junction Temperature $(T_J) = T_C + \Theta jc * (V * I)$ Typical thermal resistance (Θjc) = 86° C/W.
 - a) For $T_C = 25^{\circ}C$,

T_J = 51°C @ 5 V, 60 mA

b) For $T_C = 85^{\circ}C$,

T_J = 109°C @ 5 V, 55 mA

- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298 Visit www.macomtech.com for additional data sheets and product information.

^{*} Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.




Broadband CATV Amplifier 50 - 1000 MHz

Rev. V2


Electrical Specifications: $T_A = 25$ °C, Freq: 50 - 1000 MHz, $V_{DD} = 5$ Volts, $Z_0 = 75 \Omega$

Parameter	Test Conditions	Units	Min.	Тур.	Max.
Gain	-	dB	8	9	10
Gain Flatness	-	dB	_	0.4	8.0
Noise Figure	-	dB	_	3.8	4.8
Input Return Loss	-	dB	_	18	_
Output Return Loss	-	dB	_	18	_
Output IP3	6 MHz Spacing, +4 dBm output per tone	dBm	_	35	_
Composite Triple Beat, CTB	132 channels, +15 dBmV / channel at the input.	dBc	_	-75	_
Composite Second Order, CSO	132 channels, +15 dBmV / channel at the input.	dBc	_	-65	_
P1dB		dBm		17	
I _{DD}	5 Volts	mA	50	60	70

Recommended Board Layout

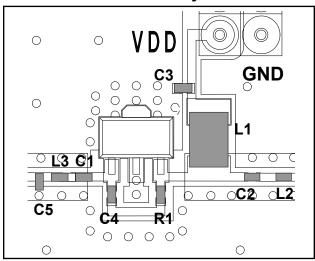

Schematic Including Off-Chip Components

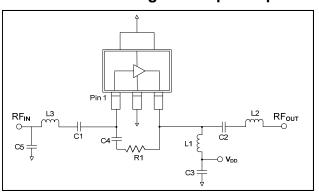

Off-Chip Component Values

Component	Value	Package		
C1 - C4	0.01 μF	0402		
C5	0.8 pF	0402		
L1 ⁷	1 μH	1210		
L2	3.3 nH	0402		
L3	6.8 nH	0402		
R1	300 Ω	0402		

^{7.} L1 supplied from EPCOS, part number B82422A1102K100

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be Proper ESD control damaged by electricity. techniques should be used when handling these devices.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not quaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298 Visit www.macomtech.com for additional data sheets and product information.




Broadband CATV Amplifier 50 - 1000 MHz


Rev. V2

Typical Performance Curves


Gain vs. Frequency over Temperature

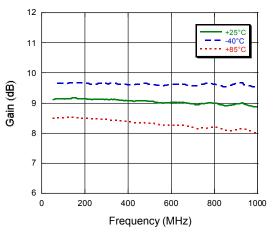


S11 vs. Frequency over Temperature

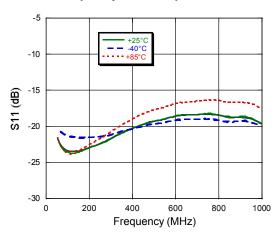


Noise Figure @ +25° C

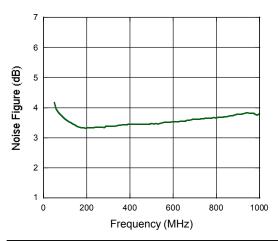

Gain vs. Frequency over Temperature to 3 GHz

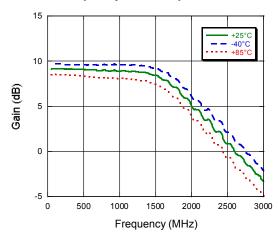

S22

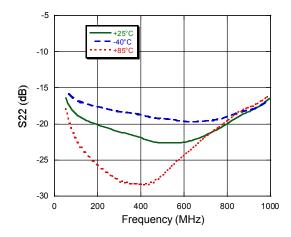

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298 Visit www.macomtech.com for additional data sheets and product information.


MAAM-007807



Broadband CATV Amplifier 50 - 1000 MHz

Rev. V2

Lead-Free SOT-89 Plastic Package[†]

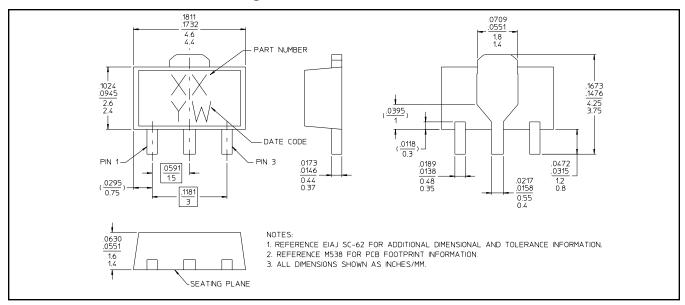

[†] Reference Application Note M538 for lead-free solder reflow recommendations. Meets JEDEC moisture sensitivity level 1 requirements. Plating is 100% matte tin over copper.

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
Visit www.macomtech.com for additional data sheets and product information.