




LBN80-6.8SAW Filter Electrical Characteristic

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	79.9	80	80.1
Insertion Loss	dB		23.2	25
1 dB Bandwidth	MHz	-	-	
3 dB Bandwidth	MHz	6.6	6.75	7
50dBBandwidth	MHz		8.27	8.4
Passband variation	dB		0.7	0.8
Phase Linearity	degrees		-	-
Group Delay Variation	nsec		-	-
Absolute Delay	usec		-	
Ultimate Rejection	dB	50	55	
Substrate Material		YZ		
Ambient Temperature	° C	25		
Package Size	DIP3512 (35x12.6x5.2mm ³)			

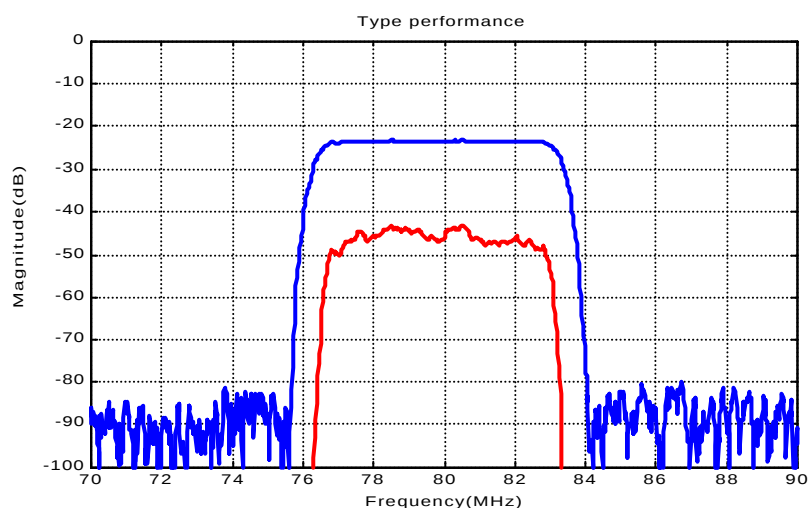

LBN80-6.8 SAW Filter Typical Performance

