

PRELIMINARY

900 MHz Balun

Detail Specification: 06/04/07

P/N 0896BL14B050

Page 1 of 2

General Specifications

Part Number	0896BL14B050
Frequency (MHz)	851 - 941
Unbalanced Impedance	50 Ω
Balanced Impedance	50 Ω
Insertion Loss	1.5 dB max.
Return Loss	9.5 dB min.

Phase Difference	180° $\pm$ 10
Amplitude Difference	0.7 dB max.
Operating Temperature	-40 to +85°C
Reel Quantity	4,000
Power Capacity	3 watts max.
MSL	2 *

P/N Suffix	Packaging	Bulk	Suffix = S	Eg. 0896BL14B050S
	Style	T & R	Suffix = E	Eg. 0896BL14B050E
	Termination	100% Tin	Suffix = None	Eg. 0896BL14B050(E or S)
	Style	Tin / Lead	Please consult Factory	



* - 1 yr shelf life in bag; 1 week shelf life out of bag; Vacuum reseal unused reel

Terminal Configuration

No.	Function
1	Unbalanced Port (IN)
2	GND or DC feed+RF GND
3	Balanced Port (OUT1)
4	Balanced Port (OUT2)
5	GND
6	NC

Mechanical Dimensions


	In	mm
L	0.063 $\pm$ 0.004	1.60 $\pm$ 0.10
W	0.031 $\pm$ 0.004	0.80 $\pm$ 0.10
T	0.024 $\pm$ 0.004	0.60 $\pm$ 0.10
a	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.006 $\pm$ 0.004	0.15 $\pm$ 0.10
g	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
p	0.020 $\pm$ 0.002	0.50 $\pm$ 0.05

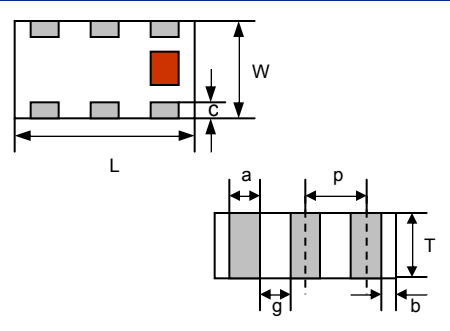

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

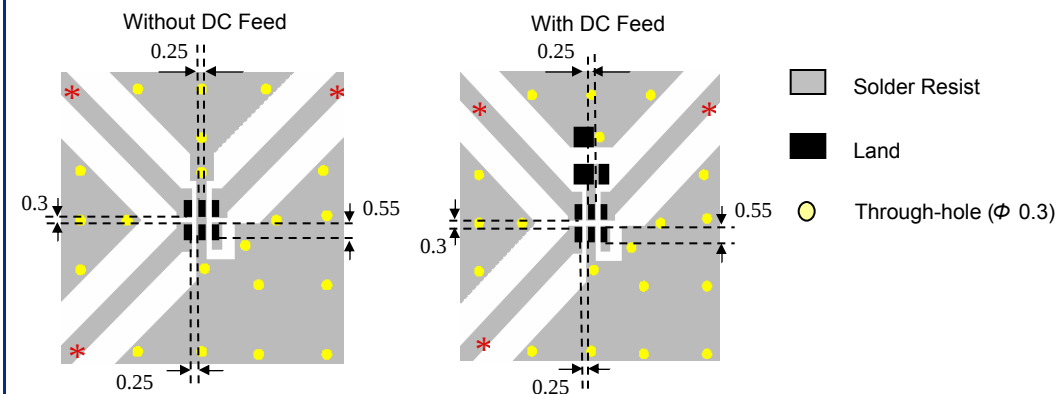

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved

PRELIMINARY

900 MHz Balun


Detail Specification: 06/04/07

P/N 0896BL14B050


Page 2 of 2

Typical Electrical Performance (T=25°C)

Insertion Loss & Return Loss

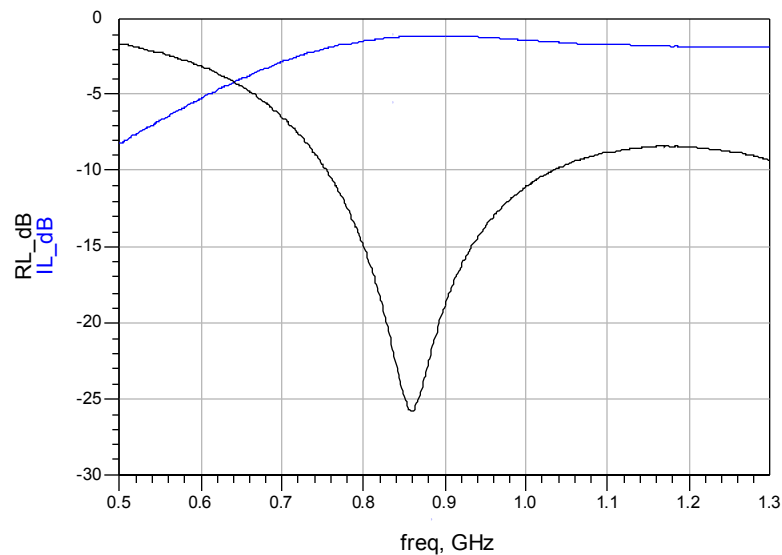

Amplitude & Phase Balance

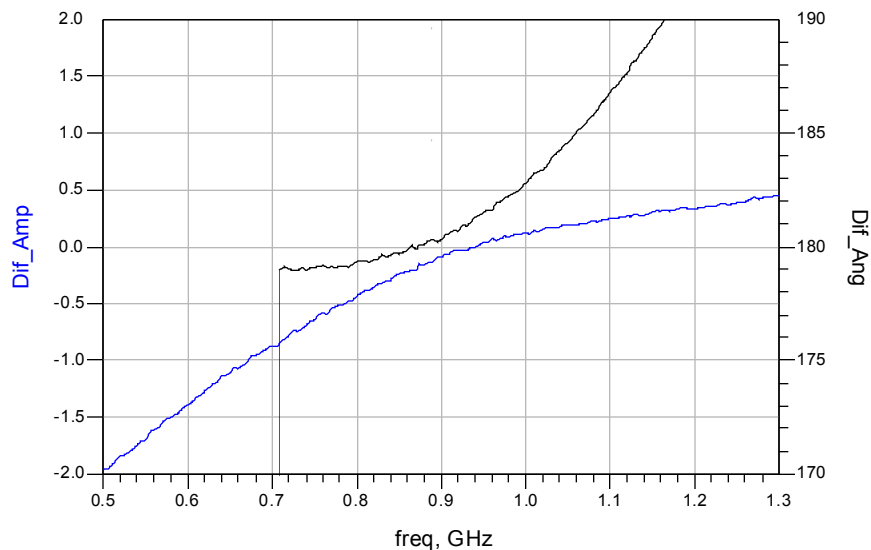

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved