DISCRETE SEMICONDUCTORS

DATA SHEET

PEMB1; PUMB1 PNP/PNP resistor-equipped transistors; R1 = 22 kΩ, R2 = 22 kΩ

Product data sheet Supersedes data of 2001 Sep 13

2003 Oct 15



PNP/PNP resistor-equipped transistors; R1 = 22 k Ω , R2 = 22 k Ω

PEMB1; PUMB1

FEATURES

- Built-in bias resistors
- · Simplified circuit design
- · Reduction of component count
- · Reduced pick and place costs.

APPLICATIONS

- · Low current peripheral drivers
- Replacement of general purpose transistors in digital applications.

SYMBOL	PARAMETER	TYP.	MAX.	UNIT
V_{CEO}	collector-emitter voltage	_	-50	V
Io	output current (DC)	_	-100	mA
TR1	PNP	_	_	_
TR2	PNP	_	_	-
R1	bias resistor	22	_	kΩ

22

 $k\Omega$

QUICK REFERENCE DATA

bias resistor

DESCRIPTION

PNP/PNP resistor-equipped transistors (see "Simplified outline, symbol and pinning" for package details).

PRODUCT OVERVIEW

TYPE NUMBER	PAC	(AGE	MARKING CODE	NPN/PNP	NPN/NPN
TIPE NOWIBER	PHILIPS	EIAJ	WARKING CODE	COMPLEMENT	COMPLEMENT
PEMB1	SOT666	-	Z4	PEMD2	PEMH1
PUMB1	SOT363	SC-88	B*3 ⁽¹⁾	PUMD2	PUMH1

R2

Note

- * = p: Made in Hong Kong.
 - * = t: Made in Malaysia.
 - * = W: Made in China.

SIMPLIFIED OUTLINE, SYMBOL AND PINNING

TYPE NUMBER	SIMPLIFIED OUTLINE AND SYMBOL	PINNING		
ITPE NUMBER	SIMPLIFIED OUTLINE AND STMBOL	PIN	DESCRIPTION	
PEMB1 PUMB1	6 5 4 R1 R2 TR2 TR1 TR2 TR1 TR2 TR2 TR1 TR2 TR2	1 2 3 4 5 6	emitter TR1 base TR1 collector TR2 emitter TR2 base TR2 collector TR1	

PNP/PNP resistor-equipped transistors; R1 = 22 k Ω , R2 = 22 k Ω

PEMB1; PUMB1

ORDERING INFORMATION

TVDE NUMBER		PACKAGE						
TYPE NUMBER NAME		DESCRIPTION	VERSION					
PEMB1	_	plastic surface mounted package; 6 leads	SOT666					
PUMB1	_	plastic surface mounted package; 6 leads	SOT363					

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
Per transi	stor	,	'	-	-
V_{CBO}	collector-base voltage	open emitter	_	-50	V
V _{CEO}	collector-emitter voltage	open base	_	-50	V
V _{EBO}	emitter-base voltage	open collector	_	-10	V
VI	input voltage				
	positive		_	+10	V
	negative		_	-40	V
I _O	output current (DC)		_	-100	mA
I _{CM}	peak collector current		_	-100	mA
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C			
	SOT363	note 1	_	200	mW
	SOT666	notes 1 and 2	_	200	mW
T _{stg}	storage temperature		-65	+150	°C
Tj	junction temperature		_	150	°C
T _{amb}	operating ambient temperature		-65	+150	°C
Per device	•				
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C			
	SOT363	note 1	_	300	mW
	SOT666	notes 1 and 2	_	300	mW

Notes

- 1. Device mounted on an FR4 printed-circuit board, single-sided copper, standard footprint.
- 2. Reflow soldering is the only recommended soldering method.

PNP/PNP resistor-equipped transistors; R1 = 22 k Ω , R2 = 22 k Ω

PEMB1; PUMB1

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
Per transist	or			
R _{th j-a}	thermal resistance from junction to ambient	T _{amb} ≤ 25 °C		
	SOT363	note 1	625	K/W
	SOT666	notes 1 and 2	625	K/W
Per device				
R _{th j-a}	thermal resistance from junction to ambient	T _{amb} ≤ 25 °C		
	SOT363	note 1	416	K/W
	SOT666	note 1	416	K/W

Notes

- 1. Device mounted on an FR4 printed-circuit board, single-sided copper, standard footprint.
- 2. Reflow soldering is the only recommended soldering method.

CHARACTERISTICS

 T_{amb} = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I _{CBO}	collector-base cut-off current	$V_{CB} = -50 \text{ V}; I_E = 0$	_	_	-100	nA
I _{CEO}	collector-emitter cut-off current	$V_{CE} = -30 \text{ V}; I_B = 0$	_	_	-1	μΑ
		$V_{CE} = -30 \text{ V}; I_{B} = 0; T_{j} = 150 ^{\circ}\text{C}$	_	_	-50	μΑ
I _{EBO}	emitter-base cut-off current	$V_{EB} = -5 \text{ V}; I_C = 0$	_	_	-180	μΑ
h _{FE}	DC current gain	$V_{CE} = -5 \text{ V}; I_{C} = -5 \text{ mA}$	60	_	_	
V _{CEsat}	saturation voltage	$I_C = -10 \text{ mA}; I_B = -0.5 \text{ mA}$	_	_	-150	mV
$V_{i(off)}$	input-off voltage	$V_{CE} = -5 \text{ V; } I_{C} = -100 \mu\text{A}$	_	-1.1	-0.8	V
V _{i(on)}	input-on voltage	$V_{CE} = -0.3 \text{ V}; I_{C} = -5 \text{ mA}$	-2.5	-1.7	_	V
R1	input resistor		15.4	22	28.6	kΩ
<u>R2</u> R1	resistor ratio		0.8	1	1.2	
C _c	collector capacitance	$I_E = i_e = 0$; $V_{CB} = -10 \text{ V}$; $f = 1 \text{ MHz}$	_	_	3	pF

2003 Oct 15


PNP/PNP resistor-equipped transistors; $R1 = 22 \text{ k}\Omega$, $R2 = 22 \text{ k}\Omega$

PEMB1; PUMB1

PACKAGE OUTLINES

Plastic surface mounted package; 6 leads

SOT666

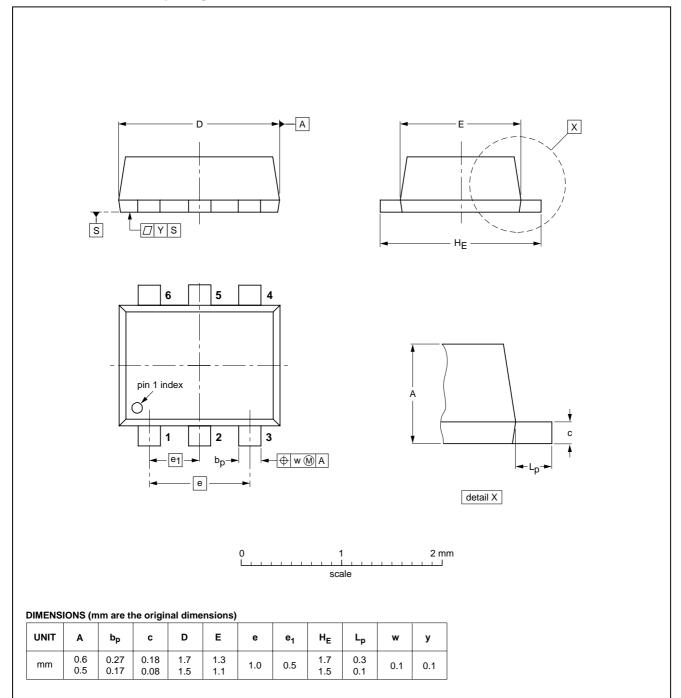

OUTLINE		REFERENCES EUROPEAN				ISSUE DATE
VERSION	IEC	JEDEC	EIAJ		PROJECTION	1330E DATE
SOT666						-01-01-04 01-08-27

REFERENCES


2003 Oct 15 5

PNP/PNP resistor-equipped transistors; R1 = 22 k Ω , R2 = 22 k Ω

PEMB1; PUMB1

Plastic surface mounted package; 6 leads

SOT363

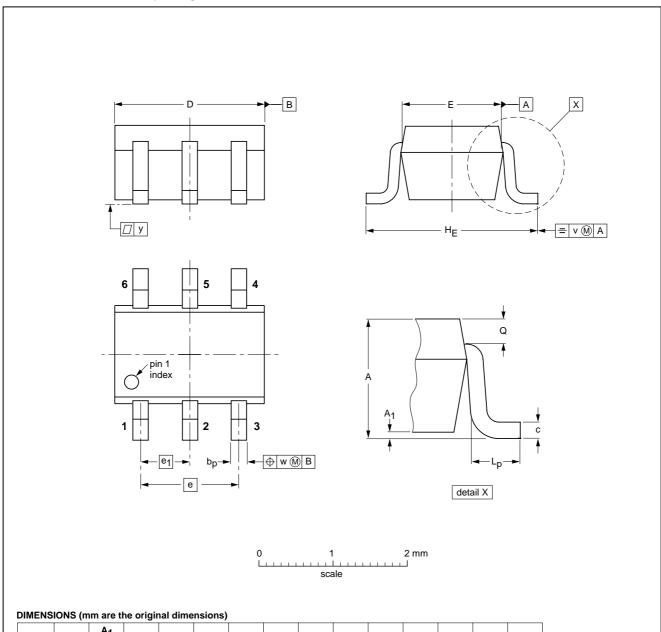

UNIT	Α	A ₁ max	bp	С	D	E	е	e ₁	HE	Lp	Q	v	w	у
mm	1.1 0.8	0.1	0.30 0.20	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.25 0.15	0.2	0.2	0.1

OUTLINE		REFER	EUROPEAN	ISSUE DATE		
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE
SOT363			SC-88		$ \ \ \bigoplus \big($	97-02-28

PNP/PNP resistor-equipped transistors; R1 = 22 k Ω , R2 = 22 k Ω

PEMB1; PUMB1

DATA SHEET STATUS

DOCUMENT STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾	DEFINITION
Objective data sheet	Development	This document contains data from the objective specification for product development.
Preliminary data sheet	Qualification	This document contains data from the preliminary specification.
Product data sheet	Production	This document contains the product specification.

Notes

- 1. Please consult the most recently issued document before initiating or completing a design.
- 2. The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

DISCLAIMERS

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions

above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

NXP Semiconductors

Customer notification

This data sheet was changed to reflect the new company name NXP Semiconductors. No changes were made to the content, except for the legal definitions and disclaimers.

Contact information

For additional information please visit: http://www.nxp.com

For sales offices addresses send e-mail to: salesaddresses@nxp.com

© NXP B.V. 2009

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands R75/02/pp8 Date of release: 2003 Oct 15 Document order number: 9397 750 11789

