

# BAS40T/-04T/-05T/-06T


# SURFACE MOUNT SCHOTTKY BARRIER DIODE


## Features


- Low Forward Voltage Drop
- Fast Switching
- Ultra-Small Surface Mount Package
- PN Junction Guard Ring for Transient and ESD Protection
- Lead Free/RoHS Compliant (Note 3)


#### **Mechanical Data**

- Case: SOT-523
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Polarity: See Diagrams Below
- Marking: See Diagrams Below & Page 2
- Weight: 0.002 grams (approximate)
- Ordering Information, see Page 2








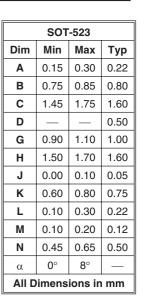

TOP VIEW

B



## Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit		
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	40	V		
RMS Reverse Voltage	V <sub>R(RMS)</sub>	28	V		
Forward Continuous Current (Note 1)	I <sub>FM</sub>	200	mA		
Non-Repetitive Peak Forward Surge Current @ t = 1.0s	I <sub>FSM</sub>	600	mA		
Power Dissipation (Note 1)	Pd	150	mW		
Thermal Resistance Junction to Ambient (Note 1)	R <sub>0JA</sub>	833	°C/W		
Operating Temperature Range	Tj	-55 to +125	°C		
Storage Temperature Range	T <sub>STG</sub>	-65 to +150	°C		


Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol Min		Max	Unit	Test Condition		
Reverse Breakdown Voltage (Note 2)	V <sub>(BR)R</sub>	40		V	I <sub>R</sub> = 10μA		
Forward Voltage	VF	_	380 1000	mV mV	$I_F = 1.0 mA$ , $t_p < 300 \mu s$ $I_F = 40 mA$ , $t_p < 300 \mu s$		
Leakage Current (Note 2)	I <sub>R</sub>		200	nA	V <sub>R</sub> = 30V		
Total Capacitance	Ст		5.0	pF	V <sub>R</sub> = 0, f = 1.0MHz		
Reverse Recovery Time	t <sub>rr</sub>	_	5.0	ns	$\label{eq:lf} \begin{array}{l} I_F = I_R = 10 \text{mA}, \\ I_{rr} = 0.1 \text{ x } I_R, \ R_L = 100 \Omega \end{array}$		

Notes: 1. Device mounted on FR-4 PC board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf. 2. Short duration test pulse used to minimize self-heating effect.

3. No purposefully added lead.

DS30265 Rev. 10 - 2

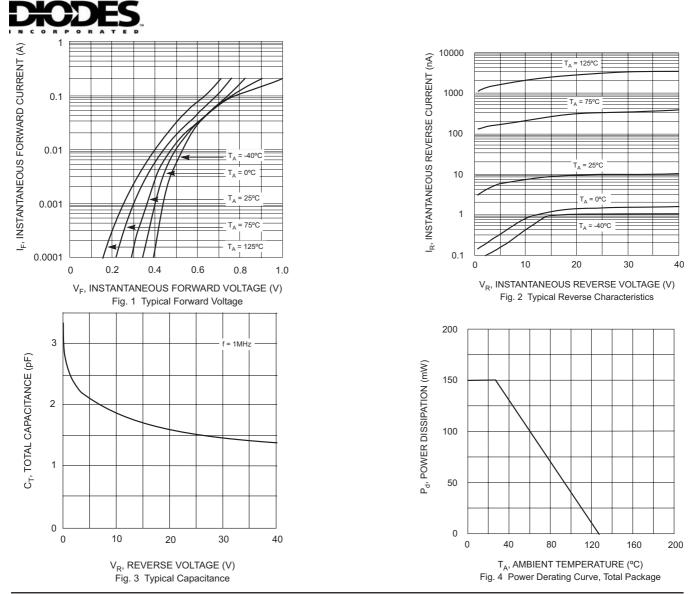


# Ordering Information (Note 4)

Device	Packaging	Shipping		
BAS40T-7-F	SOT-523	3000/Tape & Reel		
BAS40-04T-7-F	SOT-523	3000/Tape & Reel		
BAS40-05T-7-F	SOT-523	3000/Tape & Reel		
BAS40-06T-7-F	SOT-523	3000/Tape & Reel		

Notes: 4. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

# **Marking Information**



$$\begin{split} XX &= \text{Product Type Marking Code (See Page 1, e.g. 43 = BAS40T)} \\ YM &= \text{Date Code Marking} \\ Y &= Year (ex: N = 2002) \end{split}$$

M = Month (ex: 9 = September)

Date Code Key

Year	20	001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	М		Ν	Р	R	S	Т	U	V	W	Х	Y	Z
Month		Jan	Feb	March	Apr	Мау	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code		1	2	3	4	5	6	7	8	9	0	N	D

DS30265 Rev. 10 - 2

#### 2 of 3 www.diodes.com

BAS40T/-04T/-05T/-06T



#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.