



MAFLCC0001 V1

Low Cost SMT Dual Band Diplexer AMPS/PCS and GSM/DCS

Features

- · Small Size and Low Profile
- Superior Repeatability
- Passbands 824 960 MHz and 1850 1990 MHz
- Passbands 880 960 MHz and 1700 1900 MHz
- Typical Passband Insertion Loss: 0.5 dB
- 2 Watt Power Handling
- Low Cost
- Lead-Free SO-8 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- 260°C Reflow Compatible
- RoHS* Compliant Version of DP52-0002

Description

M/A-COM's MAFLCC0001 is an IC-based monolithic diplexer in a low cost SOIC-8 SMT plastic package. This diplexer is ideally suited for applications where small size, low insertion loss, superior repeatability, and low cost are required. Typical applications include AMPS/PCS and GSM/DCS dual mode portable devices.

The MAFLCC0001 is fabricated using a passiveintegrated circuit process. The process features fullchip pssivation for increased performance and reliability.

Ordering Information


| Part Number | Package |
|---------------|-------------------|
| MAFLCC0001 | Bulk Packaging |
| MAFLCC0001-TR | 1000 piece reel |
| MAFLCC0001-TB | Sample Test Board |

Note: Reference Application Note M513 for reel size

information.

Note: Die quantity varies.

Functional Block Diagram^{1,2}

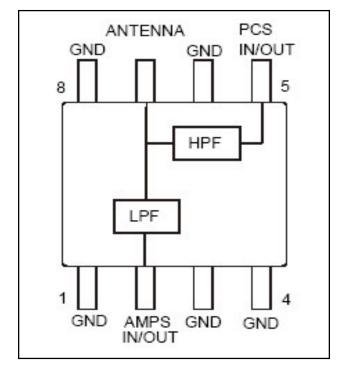

- 1. All unused pins must be RF and DC grounded.
- Pins 1 and 4 are thermal ground contacts.

Pin Configuration

| Pin No. | Function | Pin No. | Function |
|---------|-------------|---------|------------|
| 1 | GND | 5 | PCS IN/OUT |
| 2 | AMPS IN/OUT | 6 | GND |
| 3 | GND | 7 | ANTENNA |
| 4 | GND | 8 | GND |

^{*} Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

North America Tel: 800.366.2266 / Fax: 978.366.2266

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298





MAFLCC0001 V1

Low Cost SMT Dual Band Diplexer AMPS/PCS and GSM/DCS

824 – 960 / 1850 – 1990 MHz Electrical Specifications: T_A = 25°C, Z_0 = 50 Ω

| Parameter | Units | Min | Тур | Max |
|-------------------------|-------|-----|-------|-------|
| Passband Insertion Loss | dB | _ | 0.5 | 0.8 |
| Stopband Isolation | dB | 12 | 18 | _ |
| Passband VSWR | _ | _ | 1.4:1 | 1.7:1 |

880 – 960 / 1700 – 1900 MHz Electrical Specifications: $T_A = 25$ °C, $Z_0 = 50\Omega$

| Parameter | Units | Min | Тур | Max |
|-------------------------|-------|-----|-------|-------|
| Passband Insertion Loss | dB | _ | 0.5 | 0.9 |
| Stopband Isolation | dB | 12 | 18 | _ |
| Passband VSWR | _ | _ | 1.5:1 | 1.8:1 |

Absolute Maximum Ratings 3,4

| Parameter | Absolute Maximum |
|-----------------------|------------------|
| Input Power | 2W CW |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -65°C to +150°C |

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.


Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

GMIC Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Recommended PCB Configuration

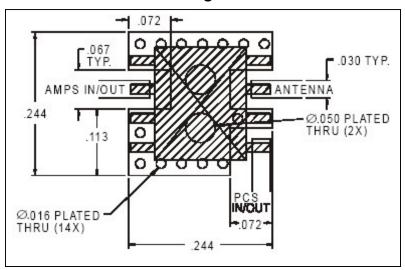

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298






MAFLCC0001 V1


Low Cost SMT Dual Band Diplexer AMPS/PCS and GSM/DCS

Typical Performance Curves

Insertion Loss vs. Frequency

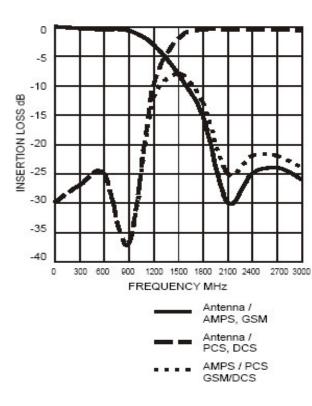

VSWR vs. Frequency

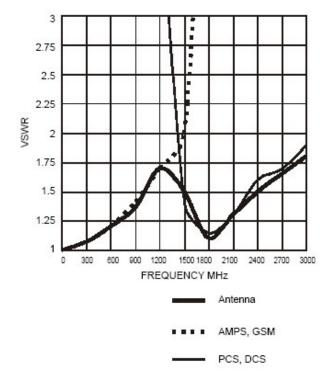

- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298






MAFLCC0001

Low Cost SMT Dual Band Diplexer AMPS/PCS and GSM/DCS

Lead-Free, SO-8[†]

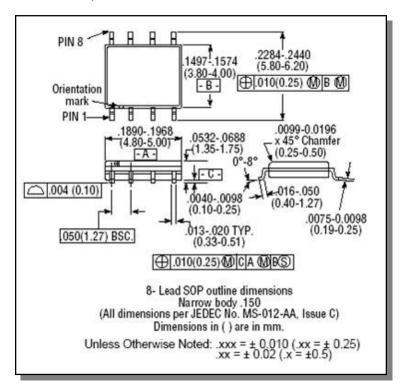

[†] Reference Application Note M538 for lead-free solder reflow recommendations.

information.

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298